


Rescue Your Design With 5 Capacitor Alternatives



- Voltage: 2 To 35 VDC
- Capacitance: 2.2 μ F To 560 μ F
- Ripple up to 10.2Arms
- Lowest ESL/ESR: 0.5nH/3m Ω

SP-Cap

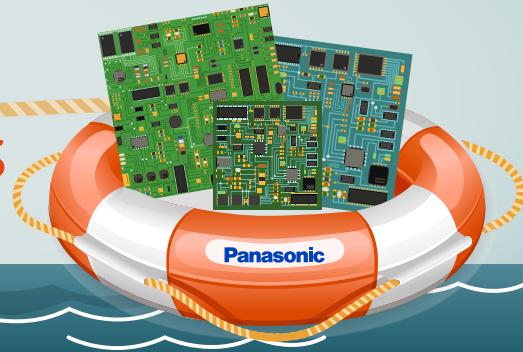

- Voltage: 2 To 35 VDC
- Capacitance: 3.9 μ F To 1500 μ F
- Size: 2.0x1.25 to 7.3x4.3mm
- ESR: As Low As 5m Ω

POSCAP



- Voltage: 2 To 100 VDC
- Capacitance: 3.3 μ F To 2700 μ F
- Ripple Up To 7.2Arms
- ESR: As Low As 5m Ω

OS-CON™



Hybrid

- Voltage: 25 To 80 VDC
- Temp: Up To 145°C
- Ripple Up To 4.0Arms
- AEC-Q200 Compliant



Film

- Voltage: Up To 630 VDC
- Capacitance: 0.0001 μ F To 1 μ F
- Size: 1.6 x 0.8 To 7.1 x 6.3
- Temp: - Up To 125°C

Do MORE With Less!

One Polymer Capacitor Has
The Ability To Replace Many MLCCs



- Industry Leading Low Capacitance Rating Up To 1500 μ F (No DC Bias Effect)
- Voltage Ratings up to 100V (No Derating)
- Industry leading Low ESR
- Physically Robust
- Safe Failure Mode
- Long Life
- Stable Characteristics Against Temperature And Bias Voltage
- Significantly Safer Than MLCCs
- Space Reduction
- Lower System Cost
- Easy To Use
- Higher System Performance And Safety

For more information please visit: na.industrial.panasonic.com/mlccreplace