

Multi-Tier IEC Lock Appliance Outlets

Product Range

6.3mm Wide Terminal Type - 6 Tier

PA135015BK6

C13 6 Tier IEC Lock Appliance Outlet, 6.3 Terminal, 1.5mm Panel Thickness



Errors & Omissions excluded. Specification is subject to change without notice


				scale %		date	name
					created	05.07.2017	FT
					approved	05.07.2017	FT
rev.	modification / change no.	date	name	SPECIFICATION			
SCHAFFNER EMV AG CH-4542 LUTERBACH				817967	C13- 6 Tier Locking-Outlet		
We reserve all rights in this document and in the information contained therein. Passing on and/or copying of this document, use and/or communication of its content is not permitted without authorization of Schaffner.				DRW	178938	A	
© CorSPE 178938 A				ved.	www.schaffner.com	plot date: 7/7/2017	page: 1 of 5

Product Range

6.3mm Wide Terminal Type - 6 Tier

PA135015BK6

C13 6 Tier IEC Lock Appliance Outlet, 6.3 Terminal, 1.5mm Panel Thickness

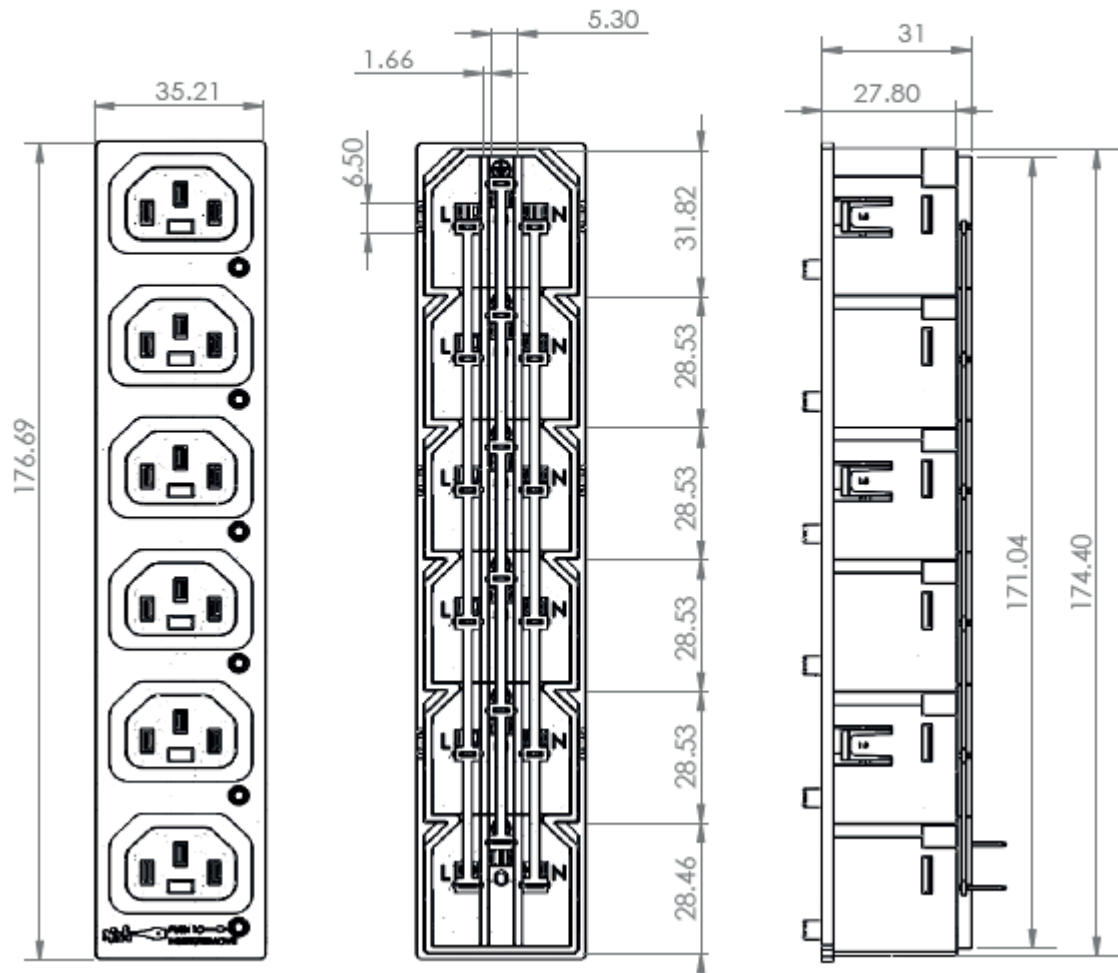

Errors & Omissions excluded. Specification is subject to change without notice


				scale		date	name
				%	created	05.07.2017	FT
					approved	05.07.2017	FT
rev.	modification / change no.	date	name	SPECIFICATION			
SCHAFFNER EMV AG CH-4542 LUTERBACH				817967	C13- 6 Tier Locking-Outlet		
We reserve all rights in this document and in the information contained therein. Passing on and/or copying of this document, use and/or communication of its content is not permitted without authorization of Schaffner.				DRW	178938	A	
© CofSPE 178938 A				ved.	www.schaffner.com	plot date: 7/7/2017	page: 2 of 5

Product Range

6.3mm Wide Terminal Type - 6 Tier

PA135015BK6

C13 6 Tier IEC Lock Appliance Outlet, 6.3 Terminal, 1.5mm Panel Thickness

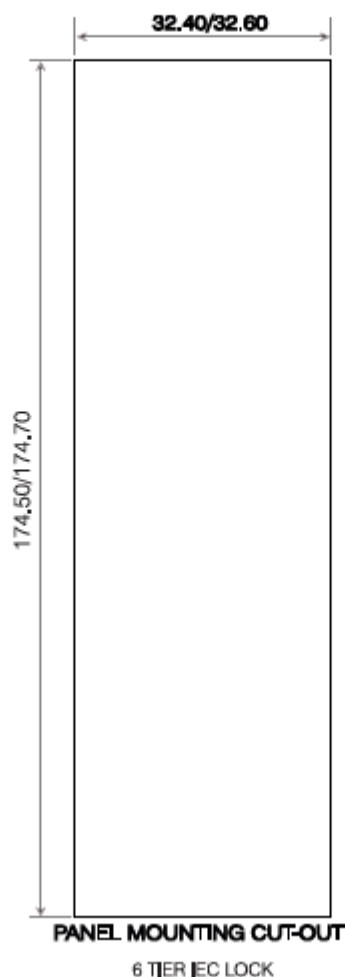

Errors & Omissions excluded. Specification is subject to change without notice

				scale		date	name
				%	created	05.07.2017	FT
					approved	05.07.2017	FT
rev.	modification / change no.	date	name	SPECIFICATION			
SCHAFFNER EMV AG CH-4542 LUTERBACH				817967	C13- 6 Tier Locking-Outlet		
We reserve all rights in this document and in the information contained therein. Passing on and/or copying of this document, use and/or communication of its content is not permitted without authorization of Schaffner.				DRW	178938	A	
© CoqSPE 178938 A				ved.	www.schaffner.com	plot date: 7/7/2017	page: 3 of 5

Technical Specification

Multi-Tier IEC Lock Appliance Outlets

Rating 10A/250V AC (EN), 15A/250V AC (cUL)

Insulation Resistance 10Ω (500V DC, 1 Min)

Dielectric Strength 2KV (50Hz 1Min) to accessible surfaces

Lock Retention >100N

Materials	Face	Polyamide 66 (PA66) - To RAL Colour 9004 (Signal Black) Gloss Finish
	Back Cover	Polyamide 66 (PA66) - To RAL Colour 9004 (Signal Black) Gloss Finish
	Contacts	Tin Plated Copper Alloy (CuSn5 PB102 1/2 Hard Phosphor Bronze)
	Push Button	Polycarbonate - To RAL Colour 3020 (Traffic Red)
	Spring	Steel (Zinc Plated, Clear Passivate and de-embrittle)
	Locking Tab	Manganese Steel 65Mn (Zinc Plated to EN 1706) 5 Microns

Materials are Low Smoke Zero Halogen (LSZH) compliant

Patent

UK Number 2463468

EU Number 09787171.9

Russian Federation 2474020

Canadian Number 2,734,113

Standards & Approvals

Standards IEC / EN 60320-1:2015

UL 498, CSA C22.2 No. 182.3-M1987

Approvals



Errors & Omissions excluded. Specification is subject to change without notice

				scale		date	name
				%	created	05.07.2017	FT
					approved	05.07.2017	FT
rev.	modification / change no.	date	name	SPECIFICATION			
SCHAFFNER EMV AG CH-4542 LUTERBACH 				817967	C13- 6 Tier Locking-Outlet		
We reserve all rights in this document and in the information contained therein. Passing on and/or copying of this document, use and/or communication of its content is not permitted without authorization of Schaffner.				DRW	178938	A	
© Cor SPE 178938 A				ved.	www.schaffner.com	plot date: 7/7/2017	page: 4 of 5

DECLARATION OF CONFORMITY

1. *Issuer Name:* Scolmore International Limited
2. *Issuer Address:* 1 Scolmore Park, Landsberg,
Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7XE
3. *Object(s) of Declaration:* C13
 - a. Group IEC Lock Multi-Tier Appliances Socket Outlet
 - b. Model(s) Number PA135015BK4, PA135015BK6
4. *In accordance with the following legislation:*

Document No	Title
2013/35/EU	Low Voltage Directive
5. *All products contained within the aforementioned, comply with the relevant standards and/or requirements listed below:*
EN 60320-1:2015
UL498
CSA C22.2 No. 182.3-M1987
6. *I hereby declare that the equipment named above has been designed to comply with the relevant sections of the above referenced specifications. The unit complies with all applicable Essential Requirements of the Directives.*

In conjunction with the above all manufacture and process controls are in accordance with ISO 9001:2008.

This declaration has been issued under the sole responsibility of the manufacturer, signed at, for and on behalf of: Scolmore International Limited

R Turner

Ross Turner - Technical Support Engineer

				scale		date	name
				%	created	05.07.2017	FT
					approved	05.07.2017	FT
rev.	modification / change no.	date	name	SPECIFICATION			
SCHAFFNER EMV AG CH-4542 LUTERBACH				817967	C13- 6 Tier Locking-Outlet		
We reserve all rights in this document and in the information contained therein. Passing on and/or copying of this document, use and/or communication of its content is not permitted without authorization of Schaffner.				DRW	178938	A	
© CoSPE 178938 A				ved.	www.schaffner.com	plot date: 7/7/2017	page: 5 of 5