

World smallest Time-of-Flight (ToF) laser ranging sensor

Data brief



Features

- Fully integrated miniature module
 - 940nm Laser VCSEL
 - VCSEL driver
 - Ranging sensor with advanced embedded microcontroller
 - 4.4 x 2.4 x 1.0mm
- Fast, accurate distance ranging
 - Measures absolute range up to 2m
 - Reported range is independent of the target reflectance
 - Operates in high IR ambient light levels
 - Advanced embedded optical cross-talk compensation to simplify cover glass selection
- Eye safe
 - Class 1 laser device compliant with latest standard IEC 60825-1:2014 - 3rd edition
- Easy integration
 - Single reflowable component
 - No additional optics
 - Single power supply
 - I2C interface for device control and data transfer
 - Xshutdown (Reset) and interrupt GPIO

Applications

- Laser assisted Auto-Focus. Enhances and speeds-up camera AF system performance, especially in difficult scenes (low light levels, low contrast) or fast moving video mode.
- Smart-phones Advanced Proximity sensor (distance in mm)
- User detection for Personal Computers/ Laptops and IoT (Energy saving)
- Security (autonomous low power mode)
- 1D gesture recognition
- Robotics (obstacle detection).

Description


VL53L0X is a new generation Time-of-Flight laser-ranging module housed in the smallest package on the market today setting a new benchmark in ranging performance levels.

VL53L0X can measure absolute distances up to 2m, independent of target reflectance in less than 30ms. The VL53L0X is based on Time-of-Flight principle coupled with a leading-edge SPAD (Single Photon Avalanche Diodes) array and implementing ST's second generation FlightSense™ patented technology.

The VL53L0X's 940nm VCSEL emitter (Vertical Cavity Surface-Emitting Laser), is totally invisible to the human eye and when coupled with physical Infrared filters enables longer ranging distance, higher immunity to ambient light and better robustness to cover-glass optical cross-talk.

Technical specification

Figure 1. VL53L0X block diagram and drawing

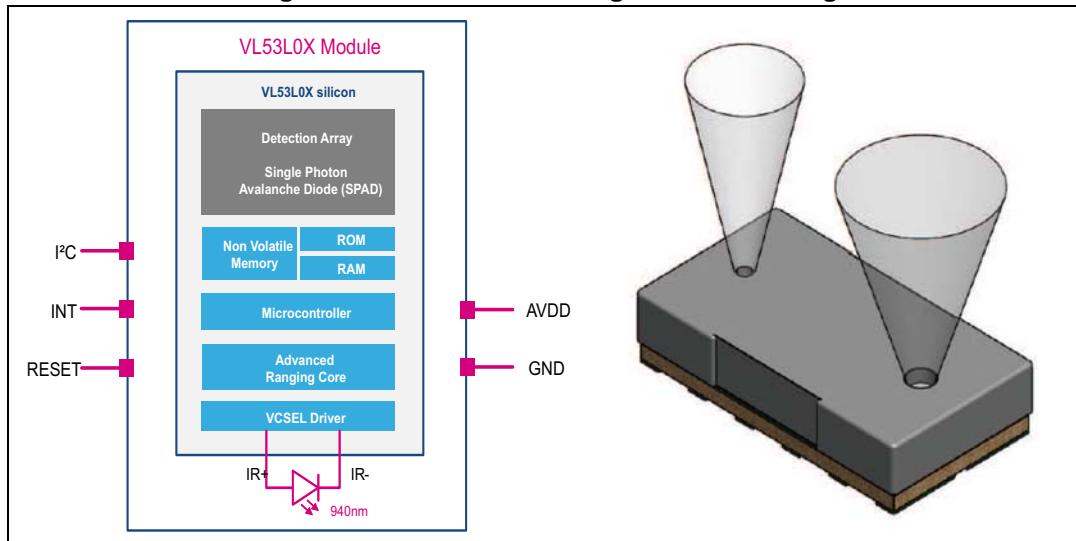

Ordering information

VL53L0X is currently available in the following format. More detailed information is available on request.

Table 1. Delivery format

Order code	Description
VL53L0CXV0DH/1	Tape and reel - VL53L0X with liner

EcoPack

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com. ECOPACK® is an ST trademark.

Revision history

Table 2. Document revision history

Date	Revision	Changes
15 Feb 2016	1	Initial release.
24 Feb 2016	2	Add liner information in Table 1

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2016 STMicroelectronics – All rights reserved