


The ultra-miniature rugged ECX-53BQZ compact SMD Crystal. The 5.0 x 3.2 x 0.9 mm ceramic package is ideal for harsh environments such as TPMS applications.

## ECX-53BQZ SMD CRYSTAL

[Request a Sample](#)

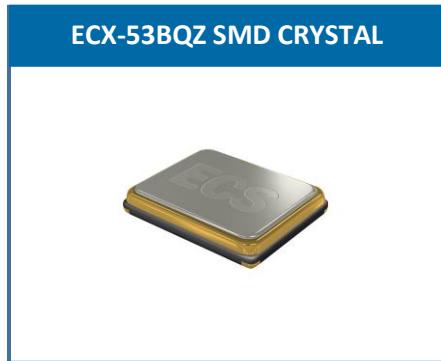

- Low Profile
- 5.0 x 3.2 mm Footprint
- Extended Temp. Range
- AEC-Q200 Qualified
- Automotive/TPMS Applications

### DIMENSIONS (mm)

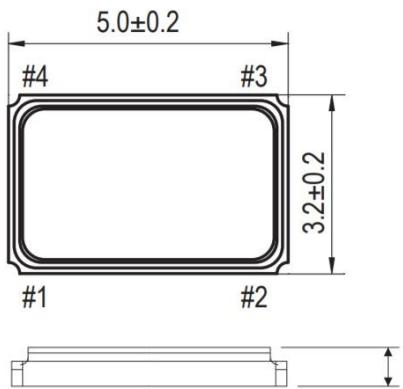


Figure 1) Top, Side, and Bottom

Crystal is symmetrical, pad 1 & 3 are interchangeable. Chamfer on the bottom pad has no electrical significance.

PARAMETERS	CONDITIONS	ECX-53BQZ			UNITS
		MIN	TYP	MAX	
Frequency		13.000		26.000	MHz
Frequency Tolerance	@ +25°C (Standard)			± 15	ppm
Frequency Stability	-40 ~ +125°C (Standard)			± 50	ppm
Equivalent Series Resistance (ESR)	13 ~ 19.999 MHz			100	Ω
	20 ~ 26.000 MHz			90	Ω
Shunt Capacitance	Co			5	pF
Load Capacitance	Specify in P/N		10		pF
Drive Level	DL		10	100	μW
Operating Temperature	Topr	-40		+125	°C
Storage Temperature	Tstg	-40		+125	°C
Aging (First Year)	@ +25°C ±3°C			±3	ppm

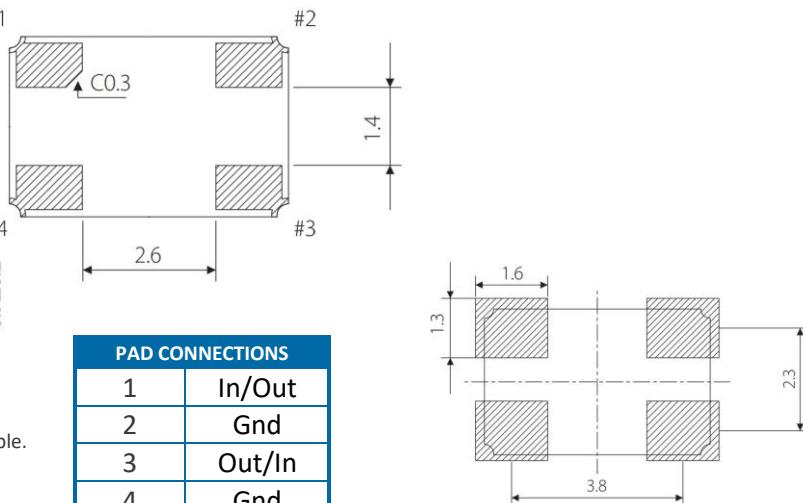


Figure 2) Suggested Land Pattern


### PART NUMBERING GUIDE: Example ECS-260-10-30BQZ-TR

ECS - FREQUENCY ABBREVIATION	LOAD CAPACITANCE	PACKAGE	AVAILABLE OPTIONS	PACKAGING
ECS	260 = 26.000 MHz *See Developed Frequencies Pg. 2	10 = 10 pF 12 = 12 pF 16 = 16 pF	30BQZ = ECX-53BQZ	Blank=Standard A = ± 25 ppm J = ± 20 ppm R = ± 15 ppm C = ± 10 ppm

\*Contact ECS for availability of non-developed or available options.

Rev.2017

**POCKET TAPE DIMENSIONS (mm)**

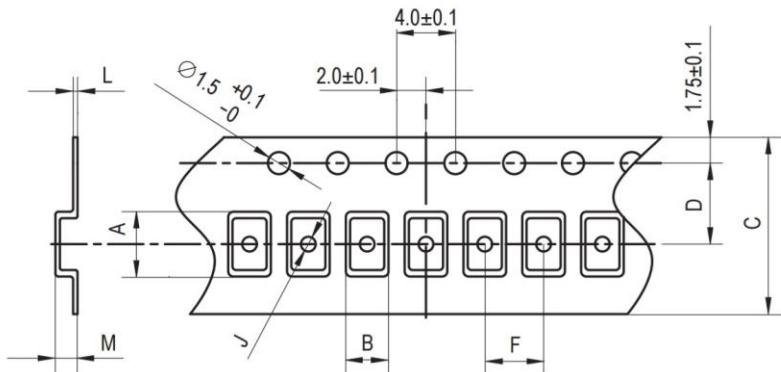


A	B	C	D	F	J	L	M	Reel Dia.	Qty/Reel
5.4	3.5	12.0	5.5	8.0	1.6	0.25	1.0	180	1000pcs

**SOLDER PROFILE**

Peak solder Temp +260°C Max 10 sec Max.  
2 Cycles Max.  
MSL 1, Lead Finish Au

**DEVELOPED FREQUENCIES**

Abbreviation	Frequency (MHZ)
135.6	13.560
180.8	18.080
196.875	19.6875
260	26.000

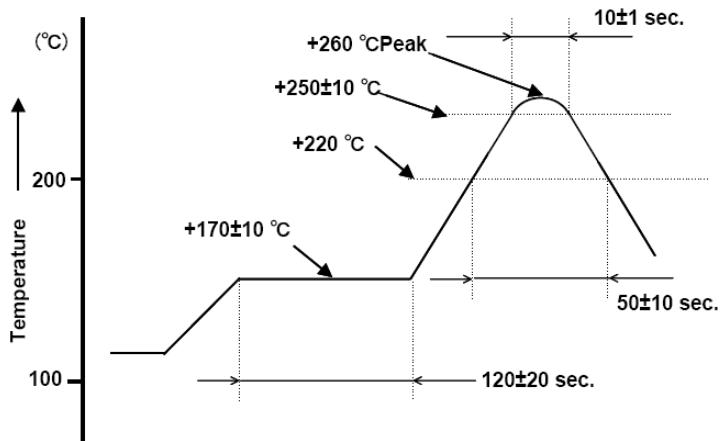

**Figure 1)** Suggested Reflow Profile

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ECS:

[ECS-135.6-10-30BQZ-TR](#) [ECS-196.875-10-30BQZ-TR](#) [ECS-260-10-30BQZ-TR](#) [ECS-180.8-10-30BQZ-TR](#)