

High Efficiency Standard Rectifier


$$\begin{aligned} V_{RRM} &= 800 \text{ V} \\ I_{FAV} &= 40 \text{ A} \\ V_F &= 1.26 \text{ V} \end{aligned}$$

Single Diode


Part number

DLA40IM800PC

Marking on Product: DLA40IM800PC



Backside: cathode



Features / Advantages:

- Planar passivated chips
- Very low leakage current
- Very low forward voltage drop
- Improved thermal behaviour

Applications:

- Diode for main rectification
- For single and three phase bridge configurations

Package: TO-263 (D2Pak)

- Industry standard outline
- RoHS compliant
- Epoxy meets UL 94V-0

Disclaimer Notice


Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.

Rectifier				Ratings			
Symbol	Definition	Conditions		min.	typ.	max.	Unit
V_{RSM}	max. non-repetitive reverse blocking voltage	$T_{VJ} = 25^{\circ}\text{C}$				900	V
V_{RRM}	max. repetitive reverse blocking voltage	$T_{VJ} = 25^{\circ}\text{C}$				800	V
I_R	reverse current	$V_R = 800\text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$			10	μA
		$V_R = 800\text{ V}$	$T_{VJ} = 150^{\circ}\text{C}$			0.05	mA
V_F	forward voltage drop	$I_F = 40\text{ A}$	$T_{VJ} = 25^{\circ}\text{C}$			1.30	V
		$I_F = 80\text{ A}$				1.56	V
		$I_F = 40\text{ A}$	$T_{VJ} = 150^{\circ}\text{C}$			1.26	V
		$I_F = 80\text{ A}$				1.65	V
I_{FAV}	average forward current	$T_C = 120^{\circ}\text{C}$ rectangular	$T_{VJ} = 175^{\circ}\text{C}$			40	A
V_{F0}	threshold voltage	} for power loss calculation only	$T_{VJ} = 175^{\circ}\text{C}$			0.85	V
r_F	slope resistance					10	m Ω
R_{thJC}	thermal resistance junction to case					0.8	K/W
R_{thCH}	thermal resistance case to heatsink				0.25		K/W
P_{tot}	total power dissipation		$T_C = 25^{\circ}\text{C}$			185	W
I_{FSM}	max. forward surge current	$t = 10\text{ ms; (50 Hz), sine}$	$T_{VJ} = 45^{\circ}\text{C}$			300	A
		$t = 8,3\text{ ms; (60 Hz), sine}$	$V_R = 0\text{ V}$			325	A
		$t = 10\text{ ms; (50 Hz), sine}$	$T_{VJ} = 150^{\circ}\text{C}$			255	A
		$t = 8,3\text{ ms; (60 Hz), sine}$	$V_R = 0\text{ V}$			275	A
I^2t	value for fusing	$t = 10\text{ ms; (50 Hz), sine}$	$T_{VJ} = 45^{\circ}\text{C}$			450	A ² s
		$t = 8,3\text{ ms; (60 Hz), sine}$	$V_R = 0\text{ V}$			440	A ² s
		$t = 10\text{ ms; (50 Hz), sine}$	$T_{VJ} = 150^{\circ}\text{C}$			325	A ² s
		$t = 8,3\text{ ms; (60 Hz), sine}$	$V_R = 0\text{ V}$			315	A ² s
C_J	junction capacitance	$V_R = 400\text{ V; } f = 1\text{ MHz}$	$T_{VJ} = 25^{\circ}\text{C}$		10		pF

Package TO-263 (D2Pak)			Ratings			
Symbol	Definition	Conditions	min.	typ.	max.	Unit
I_{RMS}	RMS current	per terminal ¹⁾			35	A
T_{VJ}	virtual junction temperature		-55		175	°C
T_{op}	operation temperature		-55		150	°C
T_{stg}	storage temperature		-55		150	°C
Weight				1.5		g
F_c	mounting force with clip		20		60	N

¹⁾ I_{RMS} is typically limited by the pin-to-chip resistance (1); or by the current capability of the chip (2). In case of (1) and a product with multiple pins for one chip-potential, the current capability can be increased by connecting the pins as one contact.

Product Marking



Part description

D = Diode
 L = Low Voltage Standard Rectifier
 A = (up to 1200V)
 40 = Current Rating [A]
 IM = Single Diode
 800 = Reverse Voltage [V]
 PC = TO-263AB (D2Pak) (2)


Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	DLA40IM800PC-TRL	DLA40IM800PC	Tape & Reel	800	509995
Alternative	DLA40IM800PC-TUB	DLA40IM800PC	Tube	50	525085

Similar Part	Package	Voltage class
DSI30-08AS	TO-263AB (D2Pak) (2)	800
DSI30-12AS	TO-263AB (D2Pak) (2)	1200
DSI30-16AS	TO-263AB (D2Pak) (2)	1600

Equivalent Circuits for Simulation

* on die level

$T_{VJ} = 175^{\circ}\text{C}$




Rectifier

$V_{0\max}$ threshold voltage 0.85

$R_{0\max}$ slope resistance * 6.8


V

mΩ

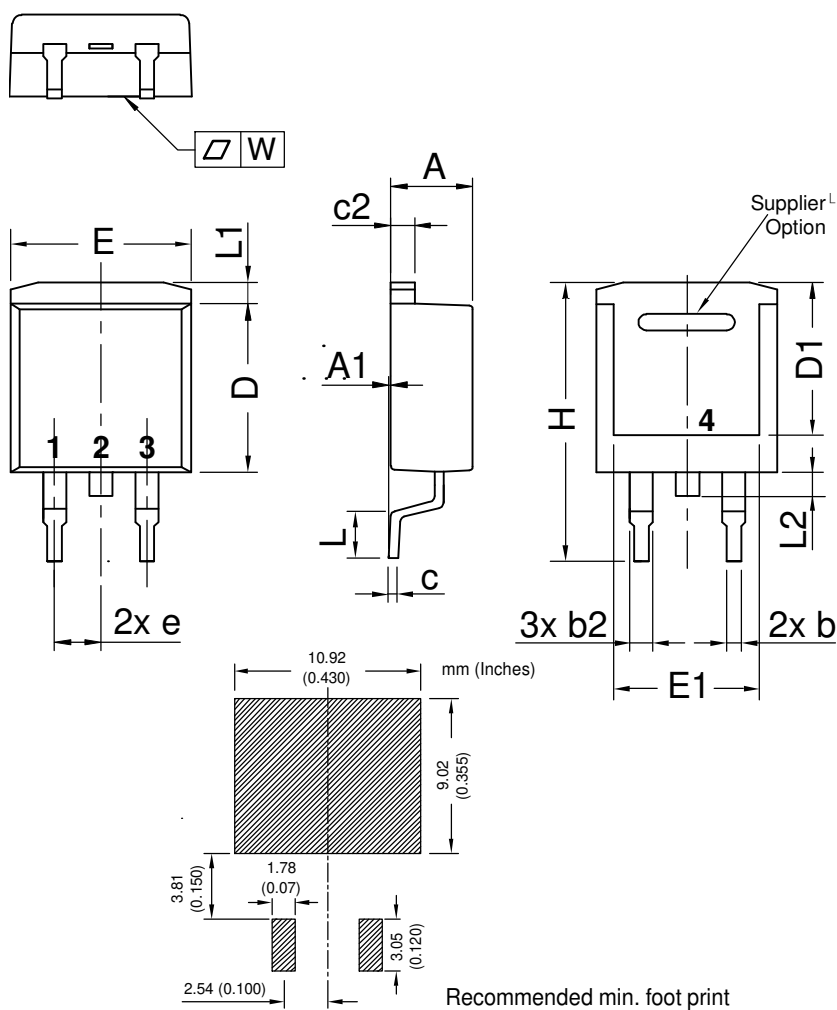Outlines TO-263 (D2Pak)


Dim.	Millimeter		Inches	
	min	max	min	max
A	4.06	4.83	0.160	0.190
A1	typ. 0.10		typ. 0.004	
A2	2.41		0.095	
b	0.51	0.99	0.020	0.039
b2	1.14	1.40	0.045	0.055
c	0.40	0.74	0.016	0.029
c2	1.14	1.40	0.045	0.055
D	8.38	9.40	0.330	0.370
D1	8.00	8.89	0.315	0.350
D2	2.5		0.098	
E	9.65	10.41	0.380	0.410
E1	6.22	8.50	0.245	0.335
e	2.54 BSC		0.100 BSC	
e1	4.28		0.169	
H	14.61	15.88	0.575	0.625
L	1.78	2.79	0.070	0.110
L1	1.02	1.68	0.040	0.066
W	typ. 0.02	0.040	typ. 0.0008	0.002

All dimensions conform with and/or within JEDEC standard.



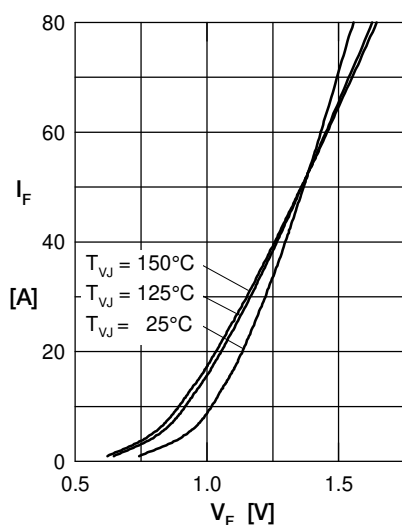
Rectifier


Fig. 1 Forward current versus voltage drop

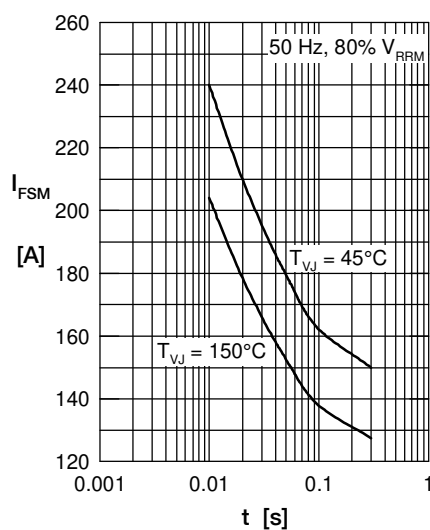


Fig. 2 Surge overload current

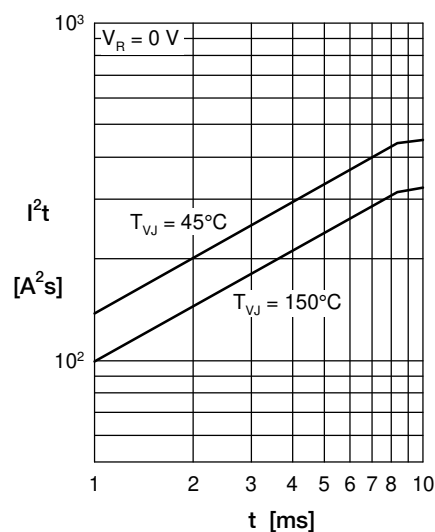
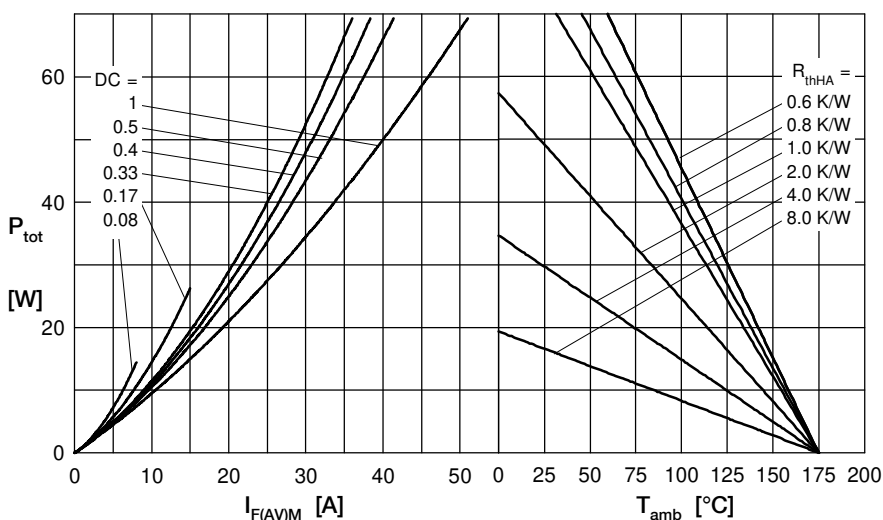

 Fig. 3 I^2t versus time


Fig. 4 Power dissipation versus direct output current and ambient temperature

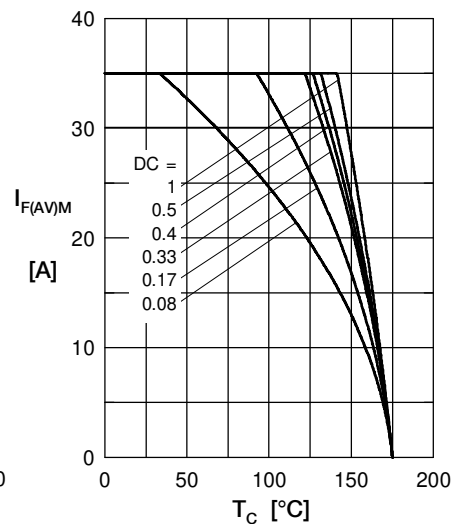


Fig. 5 Max. forward current vs. case temperature

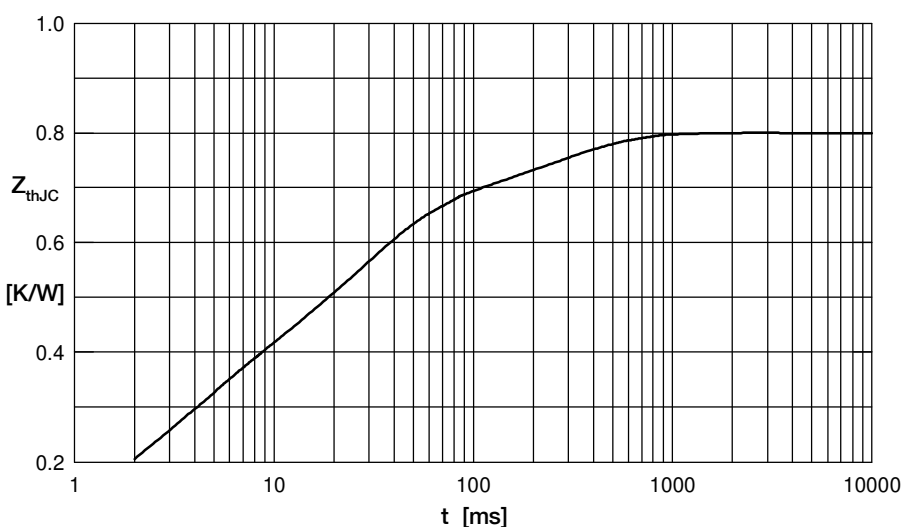


Fig. 6 Transient thermal impedance junction to case

 Constants for Z_{thJC} calculation:

i	R_{thi} (K/W)	t_i (s)
1	0.04	0.0004
2	0.07	0.002
3	0.19	0.003
4	0.35	0.024
5	0.15	0.25

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[IXYS:](#)

[DLA40IM800PC](#) [DLA40IM800PC-TUB](#) [DLA40IM800PC-TRL](#)