

# 868 and 915 MHz Chip Antenna



**AANI-CH-0171**

Request Samples



Check Inventory



**7.0 x 2.0 x 0.8 mm**

**RoHS/RoHS II Compliant**

**MSL Level = 1**


## Features

- Miniaturized in Size: 7.0 x 2.0 x 0.8 mm
- Low Return Loss of:  $\leq -10.1$  dB
- Peak Gain: 1.5 dBi
- Average Total Efficiency: -1.2 dB (75%)
- Surface Mount (SMD)
- Integration: PCB Edge Mounting

## Applications

- LPWA / LoRa / Sigfox / Wi-SUN
- Wi-Fi HaLow (IEEE 802.11ah)
- Zigbee (Sub-GHz) & W-MBUS
- Amazon Sidewalk
- Smart Metering Solutions
- Smart Irrigation Systems
- Agriculture/Environment Sensing

## Product Image

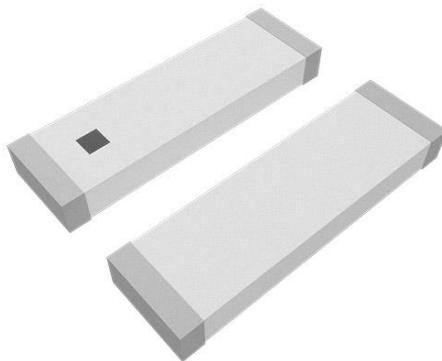

# 868 and 915 MHz Chip Antenna

**AANI-CH-0171**

Request Samples



Check Inventory



**7.0 x 2.0 x 0.8 mm**  
**RoHS/RoHS II Compliant**  
**MSL Level = 1**

## Electrical Specification

Parameter	Specification			Unit
Operating Frequency Range	863 – 928			MHz
Ground Plane Length	120	100	70	mm
Return Loss	< -10.1	< -7.0	< -4.2	dB
VSWR	< 1.9	< 2.6	< 4.2	:1
Polarization	Linear			-
Peak Gain	1.5	0.9	0.0	dBi
Minimum Total Efficiency	-1.7 (67)	-2.7 (53)	-4.4 (36)	dB (%)
Average Total Efficiency	-1.2 (75)	-2.0 (63)	-3.4 (46)	dB (%)
Maximum Total Efficiency	-1.0 (80)	-1.7 (68)	-2.7 (53)	dB (%)
Impedance	50			Ω
Radiation Pattern	Omni-directional			-
Input Power	< 2			W

*Note: All measurements were performed using the evaluation board in a free-space environment. Actual performance may vary depending on factors such as the ground plane, specific application, and surrounding environment.*

## Mechanical Specification

Parameter	Specification
Antenna Dimension	7.0 x 2.0 x 0.8 mm
Evaluation board full Dimension	130 x 30 mm
Recommended Ground Clearance for Antenna	30 x 10 mm
Mounting Type	Surface Mount
Material(s)	Ceramic

## Environmental Specification

Parameter	Specification
Operating and Storage Temperature (individual chip without packing)	-40°C ~ +85°C
Packaging Storage Temperature	-10°C ~ +40°C
Packaging Storage Relative Humidity	70% (Max.)

## Ordering Information

Part Number	Description
AANI-CH-0171	Antenna Component on Cut Tape
AANI-CH-0171-T	Antenna Component on Tape & Reel
AANI-CH-0171-EVB	Evaluation Kit



5101 Hidden Creek Ln Spicewood TX 78669  
Phone: 512-371-6159 | Fax: 512-351-8858  
For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

**REVISION I.R: 03-07-25**

ABRACON IS  
ISO9001-2015  
CERTIFIED

# 868 and 915 MHz Chip Antenna



**AANI-CH-0171**

Request Samples




Check Inventory



**7.0 x 2.0 x 0.8 mm**  
**RoHS/RoHS II Compliant**  
**MSL Level = 1**

## Product Dimensions and Terminal Configuration

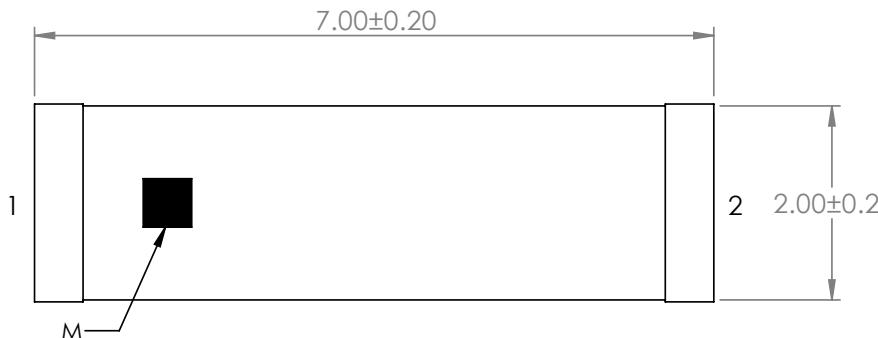


Pin #	Function
1	FEED
2	NC
M	MARK

**TOP VIEW**



**FRONT VIEW**

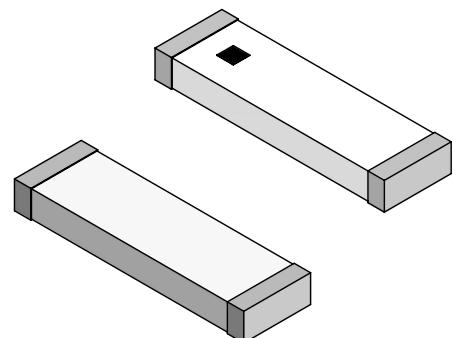

**BOTTOM VIEW**

*Unit: mm*



5101 Hidden Creek Ln Spicewood TX 78669  
Phone: 512-371-6159 | Fax: 512-351-8858  
For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

**REVISION I.R: 03-07-25**

ABRACON IS  
ISO9001-2015  
CERTIFIED

# 868 and 915 MHz Chip Antenna



AANI-CH-0171

Request Samples




Check Inventory




7.0 x 2.0 x 0.8 mm  
RoHS/RoHS II Compliant  
MSL Level = 1

## Recommended PCB layout

If there are several layers in the PCB, there is an advantage to add vias for smooth interconnection of the ground areas to avoid splits in the ground plane. It is also important that the ground clearance is respected through **all layers** of the PCB. It is recommended to implement a matching network to optimize the antenna impedance in your application.

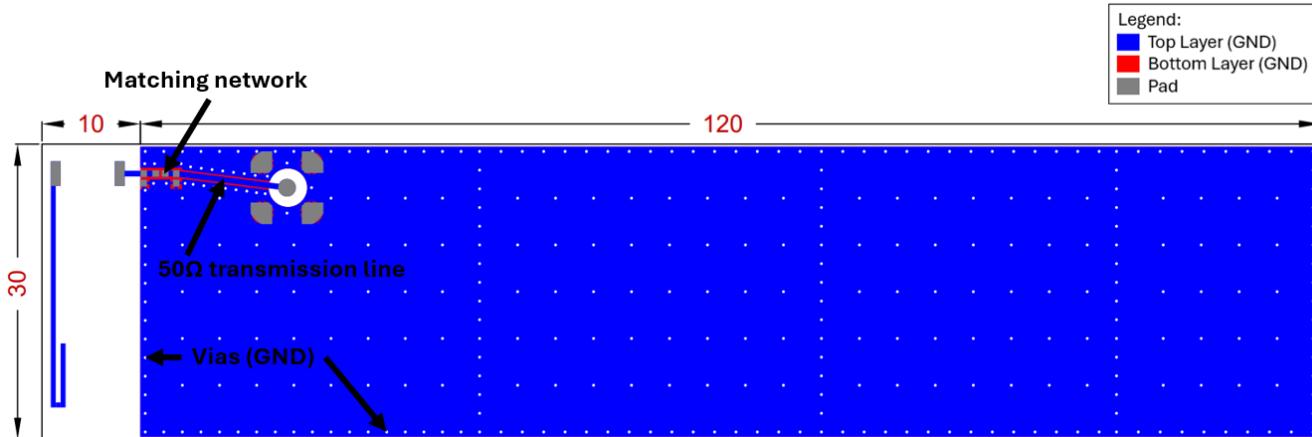

Detailed view (rotated 90 degrees) of antenna pads and antenna extension trace:

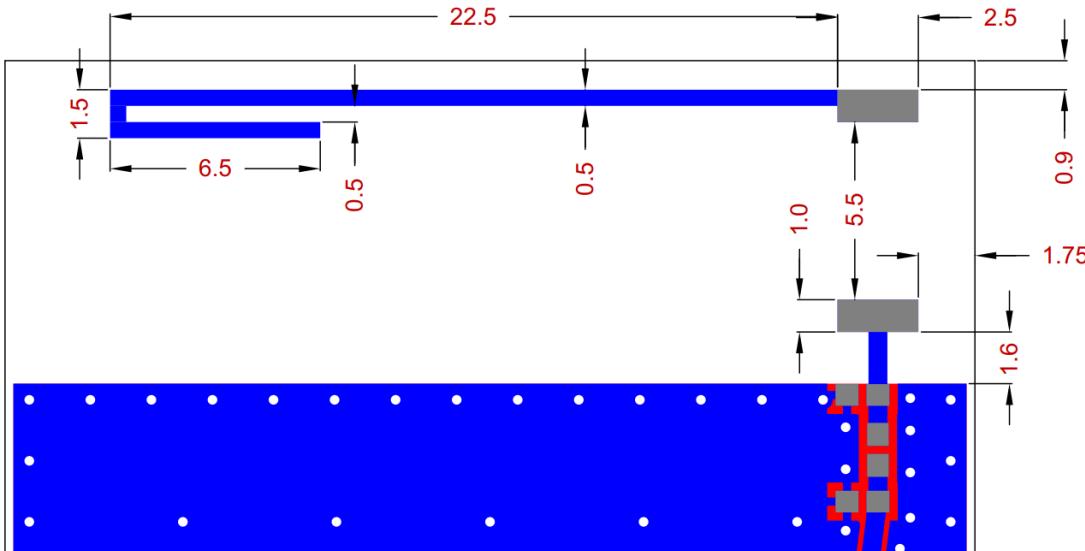

Unit: mm

## Transmission Line

The transmission line should be kept as short as possible and be designed to have a characteristic impedance of 50Ω. Abracon recommends using a Co-Planar Waveguide with Ground (CPWG), which dimensions can be derived by any trusted calculator, using the correct input for PCB materials and layer stack-up.



5101 Hidden Creek Ln Spicewood TX 78669  
Phone: 512-371-6159 | Fax: 512-351-8858  
For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

REVISION I.R: 03-07-25


ABRACON IS  
ISO9001-2015  
CERTIFIED

**AANI-CH-0171**[Request Samples](#)[Check Inventory](#)

**7.0 x 2.0 x 0.8 mm**  
**RoHS/RoHS II Compliant**  
**MSL Level = 1**


## Measurement Setup

The radiation measurements were all done in an anechoic chamber with the antenna implemented on its evaluation board (Abracon AANI-CH-0171-EVB) that has a full PCB size of 130 x 30 mm:

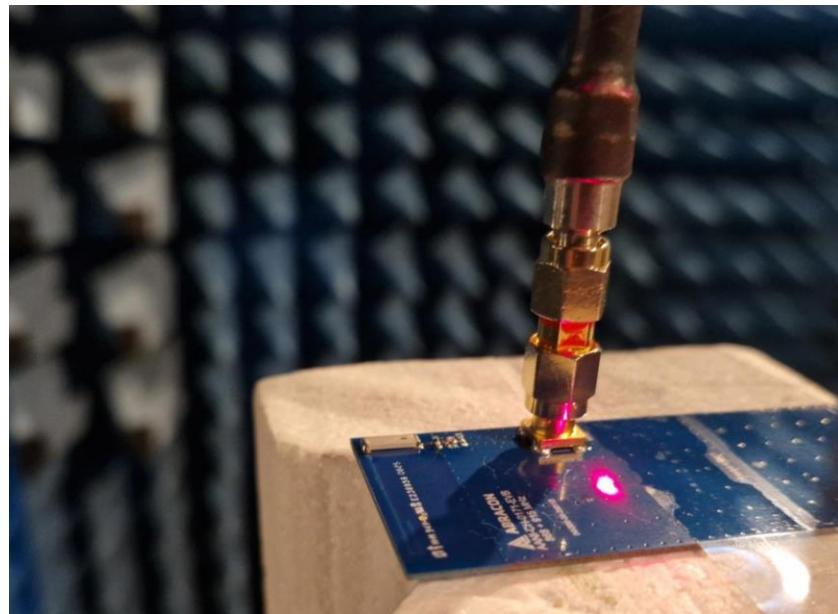

*Note: The PCB was also cut and re-tuned for measurements of several different lengths of the ground plane.*


## Reflection Characteristics – Return Loss

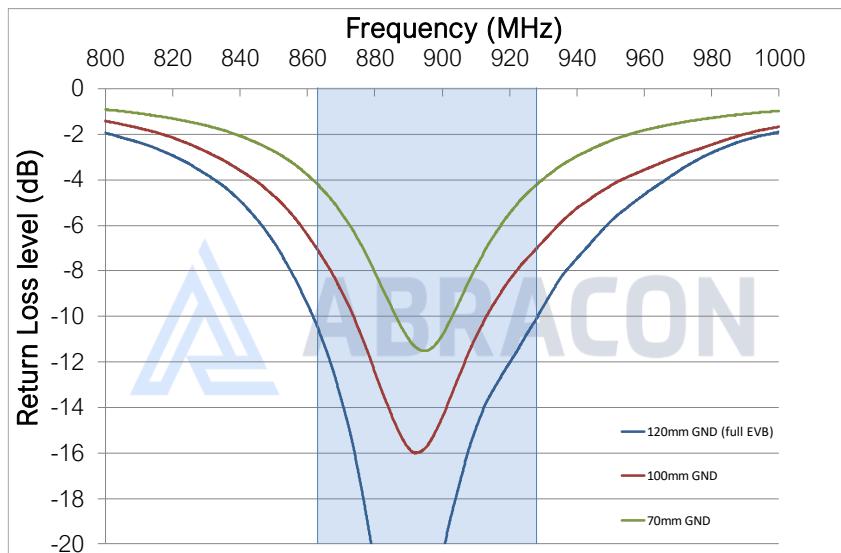


**AANI-CH-0171**[Request Samples](#)[Check Inventory](#)

**7.0 x 2.0 x 0.8 mm**  
**RoHS/RoHS II Compliant**  
**MSL Level = 1**

## Radiation Characteristics – Total Efficiency (dB)

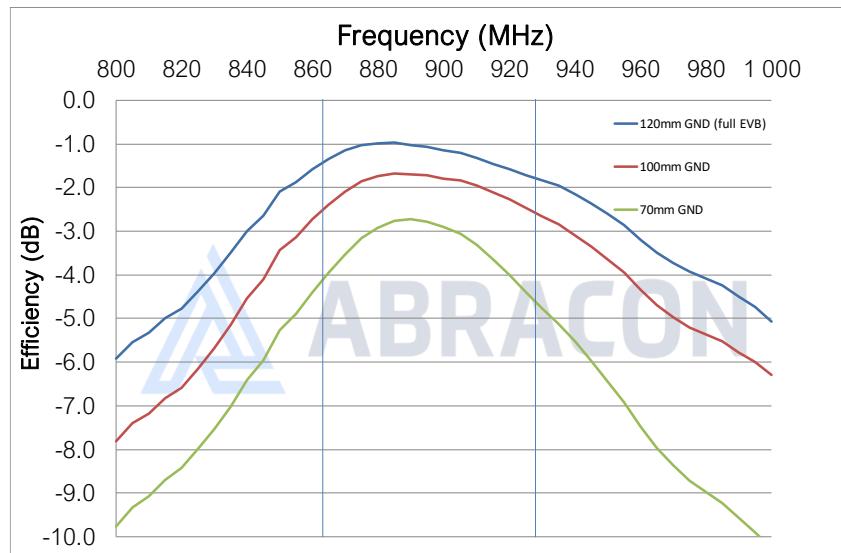

## Radiation Characteristics – Total Efficiency (%)

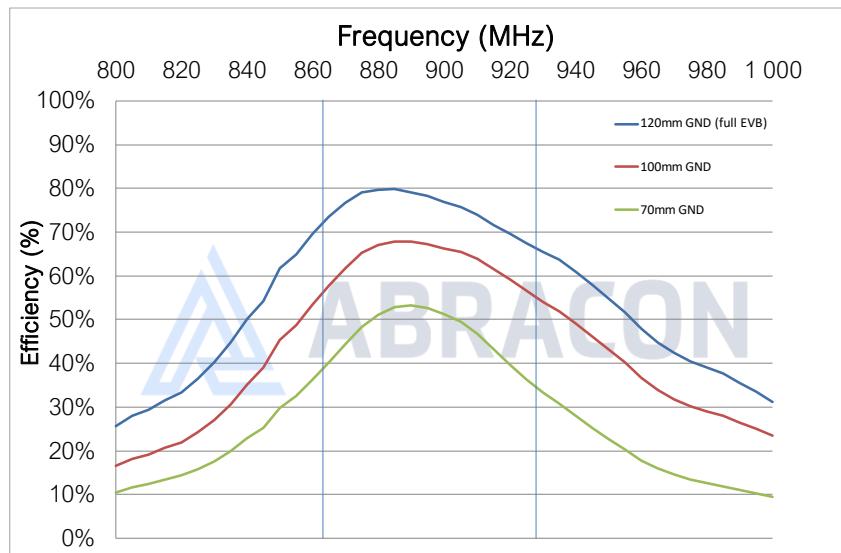

# 868 and 915 MHz Chip Antenna




AANI-CH-0171

Request Samples [\(>\)](#)

Check Inventory [\(>\)](#)

7.0 x 2.0 x 0.8 mm  
RoHS/RoHS II Compliant  
MSL Level = 1

## Radiation Characteristics – Maximum Gain

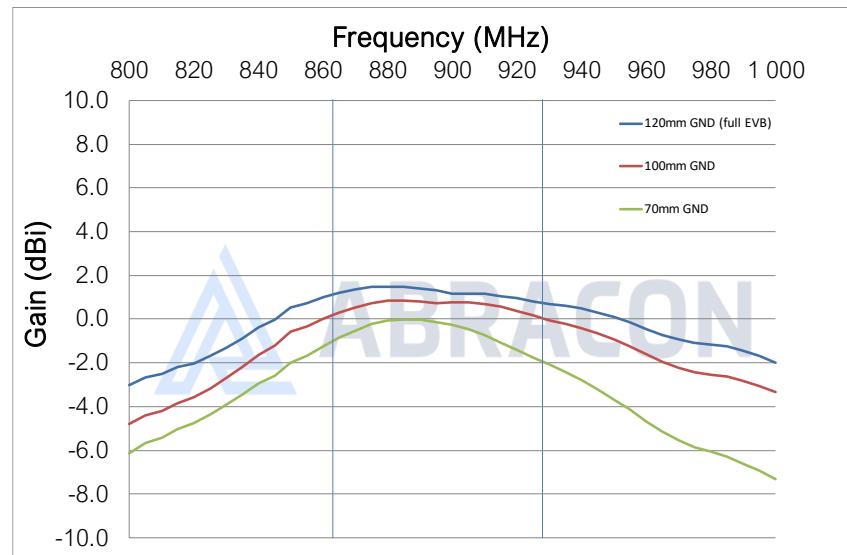

## Picture of the three different GND lengths shown side-by-side



# 868 and 915 MHz Chip Antenna



AANI-CH-0171

Request Samples



Check Inventory




7.0 x 2.0 x 0.8 mm

RoHS/RoHS II Compliant


MSL Level = 1

## Radiation Characteristics – 2D Pattern @ 895 MHz and 120mm GND (full EVB)


XY-plane:

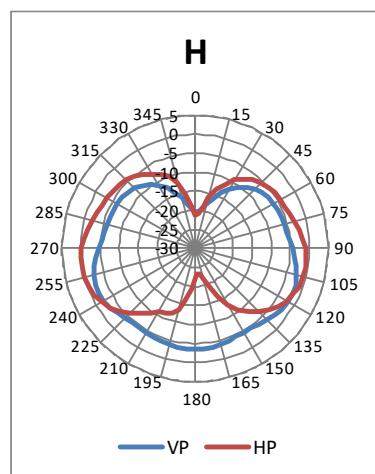



YZ-plane:

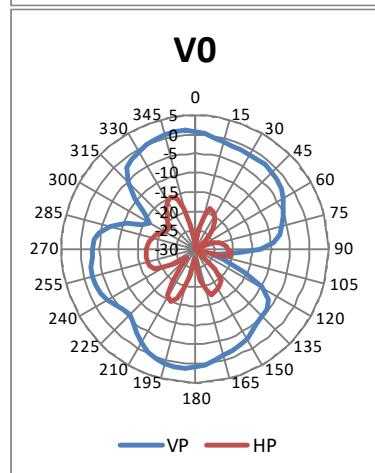

XZ-plane:

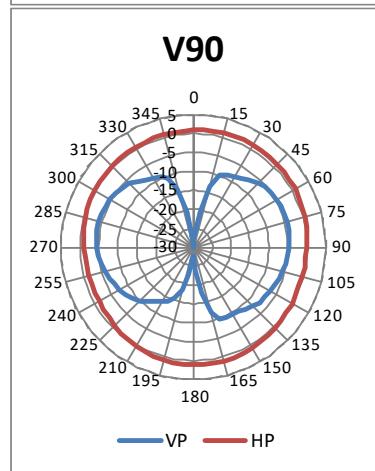

VP: Vertical Polarization  
HP: Horizontal Polarization

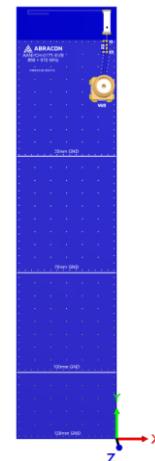

Unit: dBi

 **ABRACON**

5101 Hidden Creek Ln Spicewood TX 78669  
Phone: 512-371-6159 | Fax: 512-351-8858  
For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

REVISION I.R: 03-07-25

ABRACON IS  
ISO9001-2015  
CERTIFIED

# 868 and 915 MHz Chip Antenna



AANI-CH-0171

Request Samples



Check Inventory




7.0 x 2.0 x 0.8 mm  
RoHS/RoHS II Compliant  
MSL Level = 1


## Radiation Characteristics – 2D Pattern @ 895 MHz different GND lengths

XY-plane:


120mm GND (full EVB)

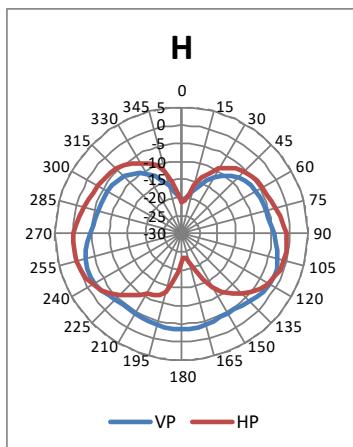

100mm GND

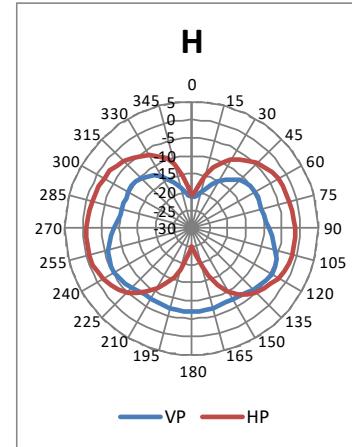


70mm GND

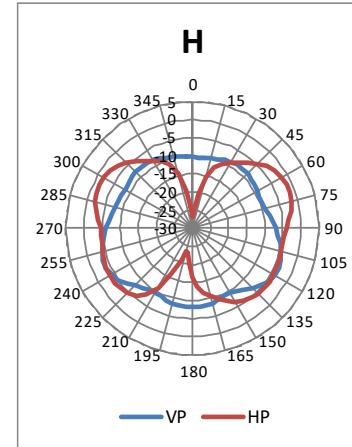


YZ-plane:


V0

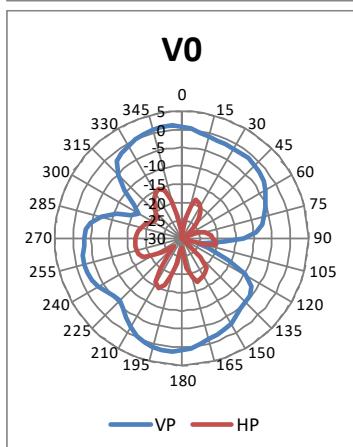

V0

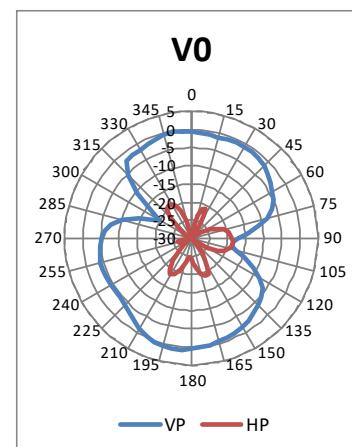


V0

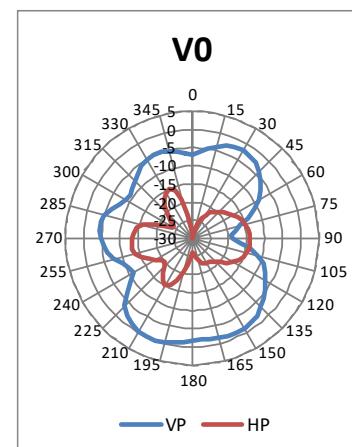


XZ-plane:


V90

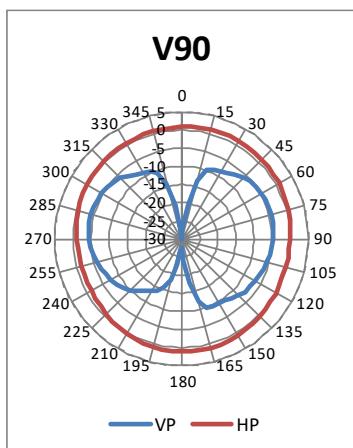

V90

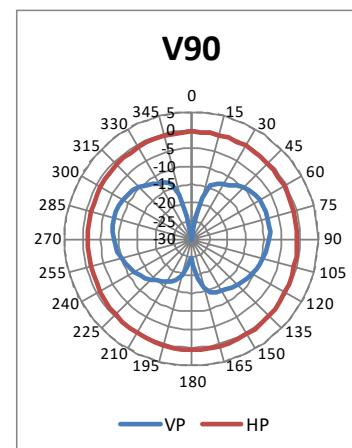

V90

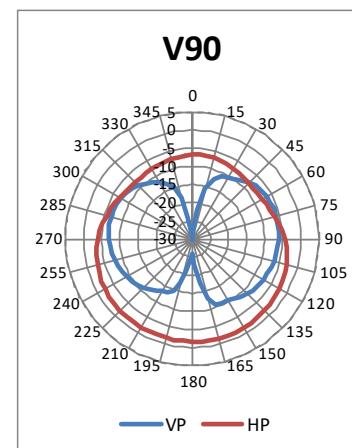

VP: Vertical Polarization

HP: Horizontal Polarization

Unit: dBi



5101 Hidden Creek Ln Spicewood TX 78669  
Phone: 512-371-6159 | Fax: 512-351-8858  
For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

REVISION I.R: 03-07-25

ABRACON IS  
ISO9001-2015  
CERTIFIED

# 868 and 915 MHz Chip Antenna



AANI-CH-0171

Request Samples




Check Inventory



7.0 x 2.0 x 0.8 mm  
RoHS/RoHS II Compliant  
MSL Level = 1


## Evaluation Board Outline & Matching Circuit

The evaluation board (Abracon AANI-CH-0171-EVB) is developed to simplify antenna testing and evaluation. It has an arbitrary size of 130 x 30 mm and includes an SMA connector. The purpose is to give a reference design for an optimal antenna implementation. The evaluation board can also be used to test other implementations by cutting and soldering the PCB into any device.

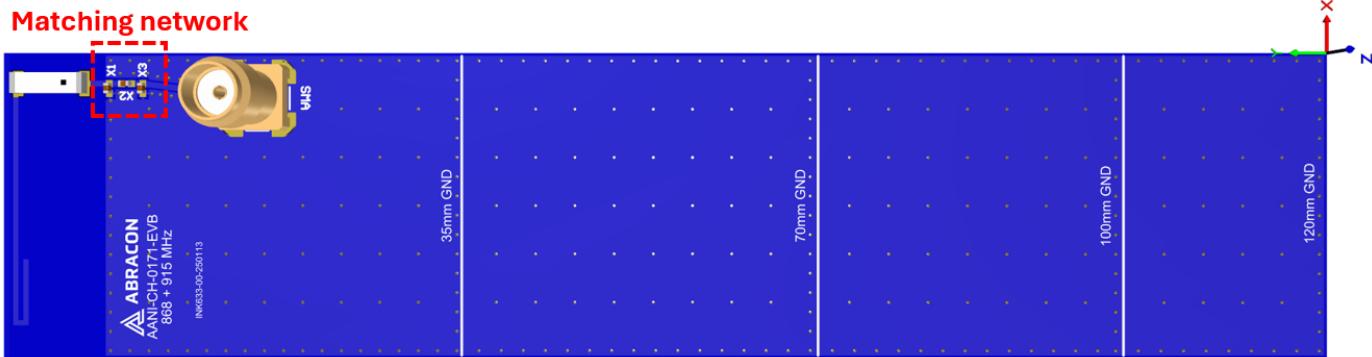

The evaluation board has a matching circuit implemented next to the antenna. This is aimed to enable optimization possibilities for the user. The component positions are sized for 0402 (1005 metric) SMD components.

The antenna requires a matching circuit to fine-tune the resonant frequency and achieve optimal balance. The evaluation board is pre-tuned for optimal performance at the full GND plane length (120 mm) in the 863-928 MHz range using the components listed below (equivalents may be used):

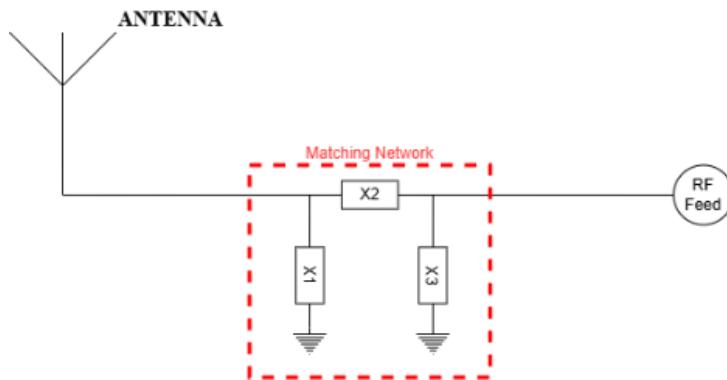

GND length:	120 mm (full length of the EVB)	100 mm	70 mm
X1	91 nH (Murata LQW15AN91NG00)	100 nH	-
X2	1.7 pF (Murata GJM1555C1H1R7WB01)	1.6 pF	1.6 pF
X3	-	91 nH	0.1 pF

However, it is common that the resonant frequency will shift during implementation in an arbitrary device. Therefore, this matching may be changed with other values/components/brands for compensation of such effects. This is further described in the General Implementation Guidelines section below.



5101 Hidden Creek Ln Spicewood TX 78669  
Phone: 512-371-6159 | Fax: 512-351-8858  
For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

REVISION I.R: 03-07-25

ABRACON IS  
ISO9001-2015  
CERTIFIED



**AANI-CH-0171**

Request Samples



Check Inventory



**7.0 x 2.0 x 0.8 mm**  
**RoHS/RoHS II Compliant**  
**MSL Level = 1**


## General Implementation Guidelines

The antenna can be positioned in different ways, although there are some positions which are more beneficial. The illustration below shows a typical PCB with examples of two different antenna positions:

- Both options 1 and 2 are ideal
- The antenna must be placed along the PCB edge, i.e., it cannot be placed in the middle (see "N/A").



### Legend:



The rectangular copper cutout in the footprint must extend through all layers of the PCB stack-up, ensuring there is **no copper on any layer in this area**. Additionally, a robust via structure around the cutout and along the edge of the ground plane is highly recommended for optimal performance.

It is important to note that plastic and metal parts in close proximity to antennas may significantly affect antenna tuning and performance. For instance, a plastic housing above the antenna often causes the resonant frequency to shift downward. Since such effects are challenging to predict without detailed design information, it is recommended to measure the antenna performance in the final device after implementation. To compensate for potential frequency shifts, implementing a matching network on the antenna feed is advisable.

Another general consideration for surface-mounted antennas relates to PCB population. Electrical components placed near the antenna may impact its tuning and radiation performance. To mitigate this, components in the surrounding area should be positioned below a topographical slope. This slope should begin at the PCB level near the antenna's designated keep-out zone and gradually increase in height as distance from the antenna grows.

For technical assistance, please contact [Abracon online support](#) through our online support platform.



AANI-CH-0171

Request Samples



Check Inventory



7.0 x 2.0 x 0.8 mm  
RoHS/RoHS II Compliant  
MSL Level = 1

## Reflow Profile [JEDEC J-STD-020]

Solder paste: Sn/3.0Ag/0.5Cu

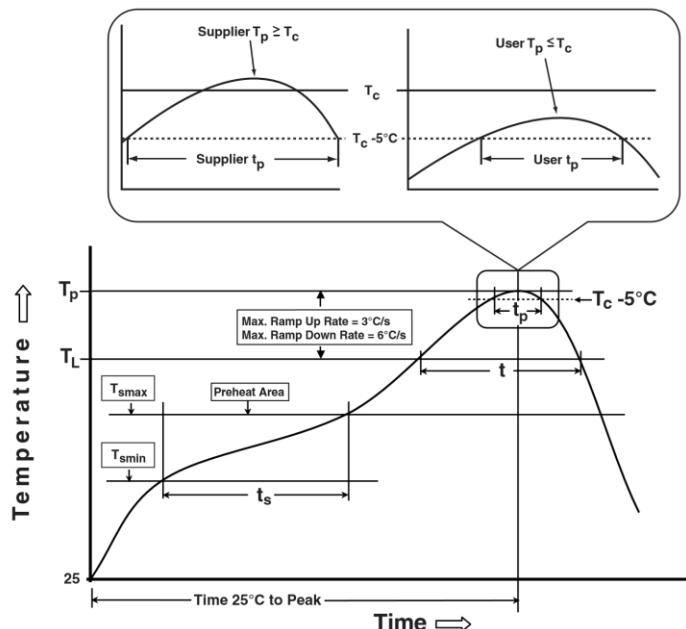


Table 1

### SnPb Eutectic Process Classification Temperatures ( $T_c$ )

Package Thickness	Volume mm <sup>3</sup> <350	Volume mm <sup>3</sup> $\geq 350$
<2.5mm	235°C	220°C
$\geq 2.5mm$	220°C	220°C

Table 2

### Pb-Free Process Classification Temperatures ( $T_c$ )

Package Thickness	Volume mm <sup>3</sup> <350	Volume mm <sup>3</sup> 350-2000	Volume mm <sup>3</sup> >2000
<1.6mm	260°C	260°C	260°C
1.6mm - 2.5mm	260°C	250°C	245°C
>2.5mm	250°C	245°C	245°C

Profile Feature	Sn-Pb Eutectic Assembly	Pb-Free Assembly
Preheat / soak		
Temperature minimum ( $T_{smin}$ )	100°C	150°C
Temperature maximum ( $T_{smax}$ )	150°C	200°C
Time ( $T_{smin}$ to $T_{smax}$ ) ( $t_s$ )	60 – 120 sec.	60 – 90 sec.
Average ramp-up rate ( $T_{smax}$ to $T_p$ )	3°C/sec. max	3°C/sec. max
Liquidous temperature ( $T_L$ )	183°C	217°C
Time at Liquidous ( $T_L$ )	60 – 150 sec.	60 – 150 sec.
Peak package body temperature ( $T_p$ )*	See Table 1	See Table 2
Time ( $T_p$ )** within 5°C of the specified classification temperature ( $T_c$ )	20 sec.	10 sec.
Ramp-down rate ( $T_p$ to $T_{smax}$ )	6°C/sec. max	6°C/sec. max
Time 25°C to peak temperature	6 min. max	8 min. max
Reflow cycles	2 max	2 max

\*Tolerance for peak profile temperature ( $T_p$ ) is defined as a supplier minimum and a user maximum.

\*\*Tolerance for time at peak profile temperature ( $t_p$ ) is defined as a supplier minimum and a user maximum.

## 868 and 915 MHz Chip Antenna



AANI-CH-0171

## Request Samples




## Check Inventory



**7.0 x 2.0 x 0.8 mm**  
**RoHS/RoHS II Compliant**  
**MSL Level = 1**

## Packaging

#### Tape & Reel dimensions:

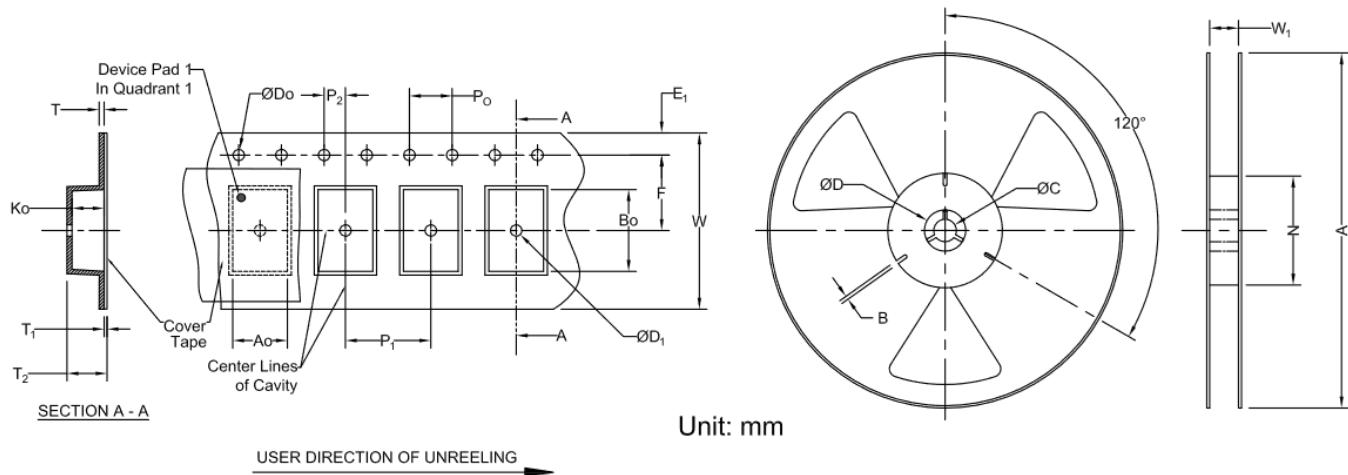

## Carrier Tape Specifications (mm)

Do	K <sub>0</sub>	E <sub>1</sub>	P <sub>0</sub>	T	F	P <sub>1</sub>	W	A <sub>0</sub>	B <sub>0</sub>	Reel Qty
1.50 + 0.1	1.0 ± 0.1	1.75 ± 0.1	4.0 ± 0.1	0.3 ± 0.05	7.5 ± 0.15	8.0 ± 0.1	16.0 ± 0.1	2.3 ± 0.1	7.5 ± 0.1	4,000

## Reel Specifications (mm)

Reel Specifications (mm)			
A	W <sub>1</sub>	N	B
330 ± 1	16.5 ± 0.2	100 ± 0.5	2.3 ± 0.2

**ATTENTION:** Abracan LLC's products are Commercial-Off-The-Shelf ('COTS'), which are designed, intended, and validated for use in commercial, industrial, and automotive applications. The customer is responsible for testing and verifying the performance of an Abracan solution to meet their system-level requirements.



5101 Hidden Creek Ln Spicewood TX 78669  
Phone: 512-371-6159 | Fax: 512-351-8858  
For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

REVISION I.R: 03-07-25

ABRACON IS  
ISO9001-2015  
CERTIFIED

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ABRACON](#):

[AANI-CH-0171-T](#)