



Low Profile - High performance, EMC/EMI filter



Performance indicators

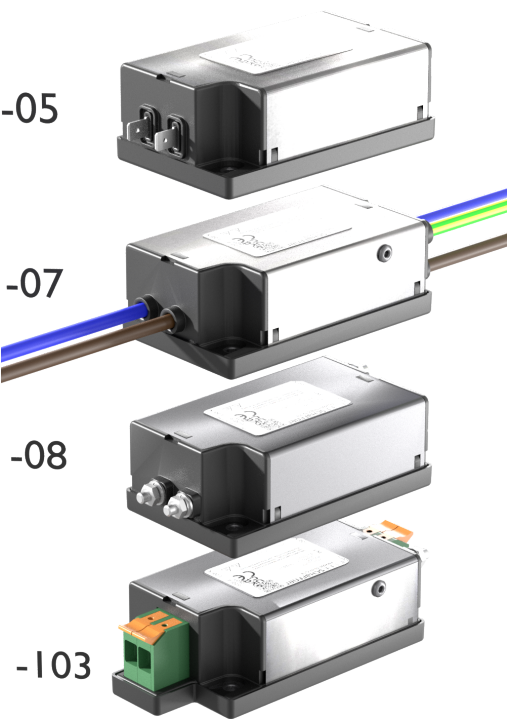

Approvals & Compliances



Certifications FN2520 pending

Features and Benefits

- FN2500 / FN2520 series fits perfectly within 1HU height for rack mount
- The filters are built to perform perfectly in datacenter and audio video equipment
- The shape allows convenient and space-saving installation
- Fulfills the requirements in IEC/EN 62040-1 - Uninterruptible power systems (UPS)
- Fulfills the requirements in IEC 62368-1 - Audio/Video, Information and Communication Technology Equipment
- Fulfills the requirements in IEC/EN 60335-1 - Household and similar appliances

Typical Applications

- Datacenter (at 400 VDC)
- Building technology with DC power distribution
- Robotics, collaborative robots, autonomous machines
- Audio and video equipment
- UPS - Uninterruptible power supplies

Technical Specifications

Rated operating voltage	277 VAC / 400 VDC (CQC: 250 VAC / 250 VDC)
Operating frequency	DC to 60 Hz
Rated currents	10 to 32 A @ 50°C
Overload capability	1.5 x rated current for 1 minute once per hour
Cooling	Natural cooling AN
Climatic category	40/100/21 acc. IEC60068-1
Flammability corresponding to	UL 94 V0
Surge withstand	2 kV Ph-Ph / 4 kV Ph-PE (Level 4)
High potential test voltage	P(DC+) -> N(DC-) 1500 VDC for 2 sec* P(DC+)/N(DC-) -> PE 2500 VDC for 2 sec*
Altitude	Derating above 2000 m
Certified to	UL/IEC 60939-3, IEC 60938-1 & 2, CSA 22.2 No. 8-13, GB/T 15287
MTBF	> 300,000 h
Protection category	IP00 / IP20 for -103 terminals
Pollution degree	2 acc. IEC 60664-1
Vibration and shock	3M12 acc. IEC 60721-3-3
Overvoltage category	II acc. IEC 60664-1
Temperature range (operation and storage)	-40°C to +100°C (with derating >40°C)

Filter Selection Table

Filter	Rated current	Leakage current*	Power loss	Inductance**	Capacitance**			Resistance**	Connections***				Weight max****
	@ 50°C (@ 40°C)	@ 277 VAC/50 Hz (@ 120 VAC/60 Hz)	@ 25°C	L1	Cx1	Cx2	Cy1	R	line side/load side				
	[A]	[mA]	[W]	[mH]	[µF]	[µF]	[nF]	[kΩ]					[kg]
Single-stage													
FN2500-10-yy-C13	10 (11)	0.87 (0.45)	5.4	8.3	1	0.47	10	680	-05	-07	-08	-103	0.3
FN2500-15-yy-C13	15 (17)	0.87 (0.45)	6.4	4.0	1	0.47	10	680	-05	-07	-08	-103	0.3
FN2500-20-yy-C13	20 (22)	0.87 (0.45)	6.2	2.4	1	0.47	10	680	-05	-07	-08	-103	0.3
FN2500-25-yy-C13	25 (27)	0.87 (0.45)	8.0	1.5	1	0.47	10	680	n.a	-07	-08	-103	0.3
FN2500-32-yy-C13	32 (35)	0.87 (0.45)	11.6	1.5	1	0.47	10	680	n.a	-07	-08	-103	0.4

* Maximum leakage current under normal operating conditions. Note: if the neutral line is interrupted, worst case leakage current could reach twice this level.

** Tolerances apply: Inductance: -30/+50%, Capacitance: ±20%, Resistance: ±10%.

***Standard parts have same input and output connections. For combinations, please contact your sales representative.

****Weight depending on choice of connectors.

Product selector

FN25tt-xx-yy-C13

13 – Y-capacitor option

13: 10 nF

yy – Line / load terminal types

05: fast-on 6.3 x 0.8 mm (up to 20 A only)

07: wire leads

08: M4 screw

103: push-in terminal


xx – Rated current

10-32: 10 A – 32 A

tt – Product family

00: Single-stage filter L1


Typical electrical schematic FN2500

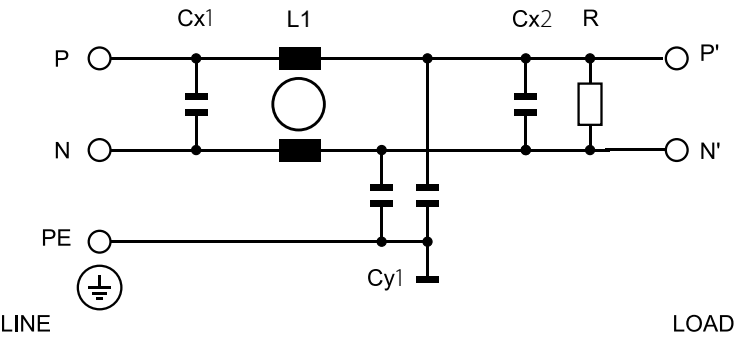


Typical Filter Attenuation

Per CISPR 17: symmetrical 50 Ω/50 Ω -> Differential Mode (DM); asymmetrical 50 Ω/50 Ω -> Common Mode (CM)


FN2500 - Single-stage filter

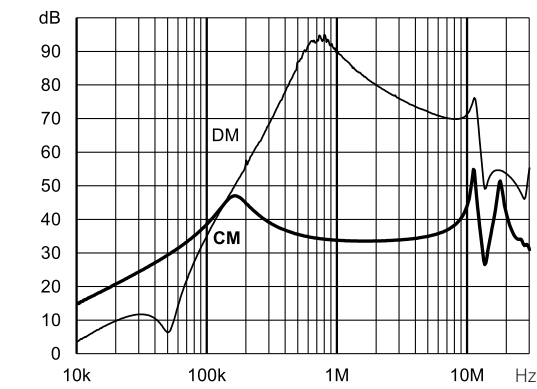


FN2500-10-yy-C13

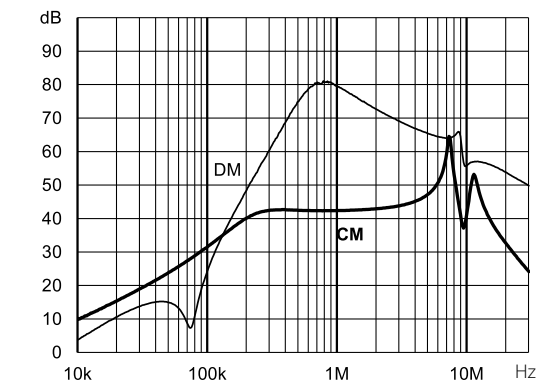


FN2500-15-yy-C13

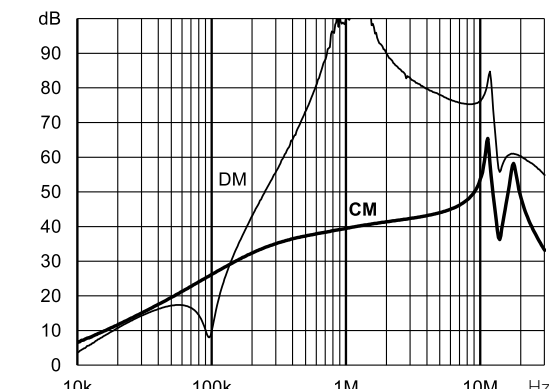

FN2500-20-yy-C13

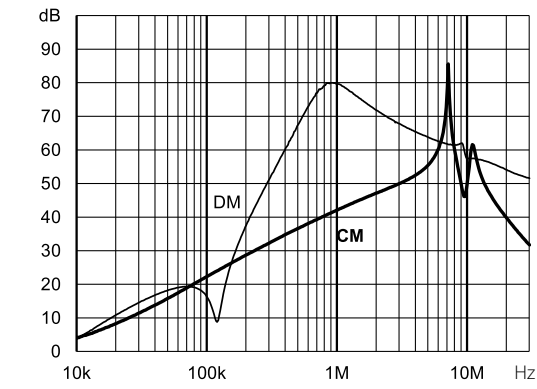


FN2500-25-yy-C13

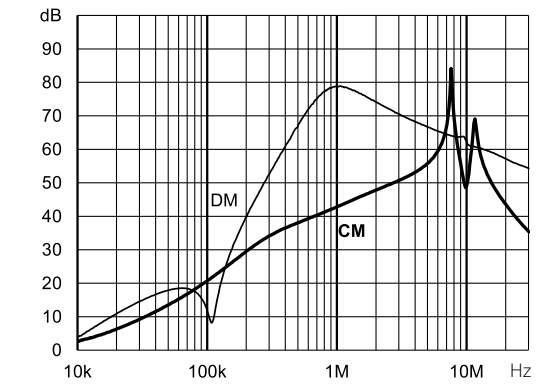

FN2500-32-yy-C13


Dimensions FN2500 - 10 A To 25 A - Single-stage Filter

For dimensions [mm] without tolerances: ISO2768-cL/EN22768-cL applies

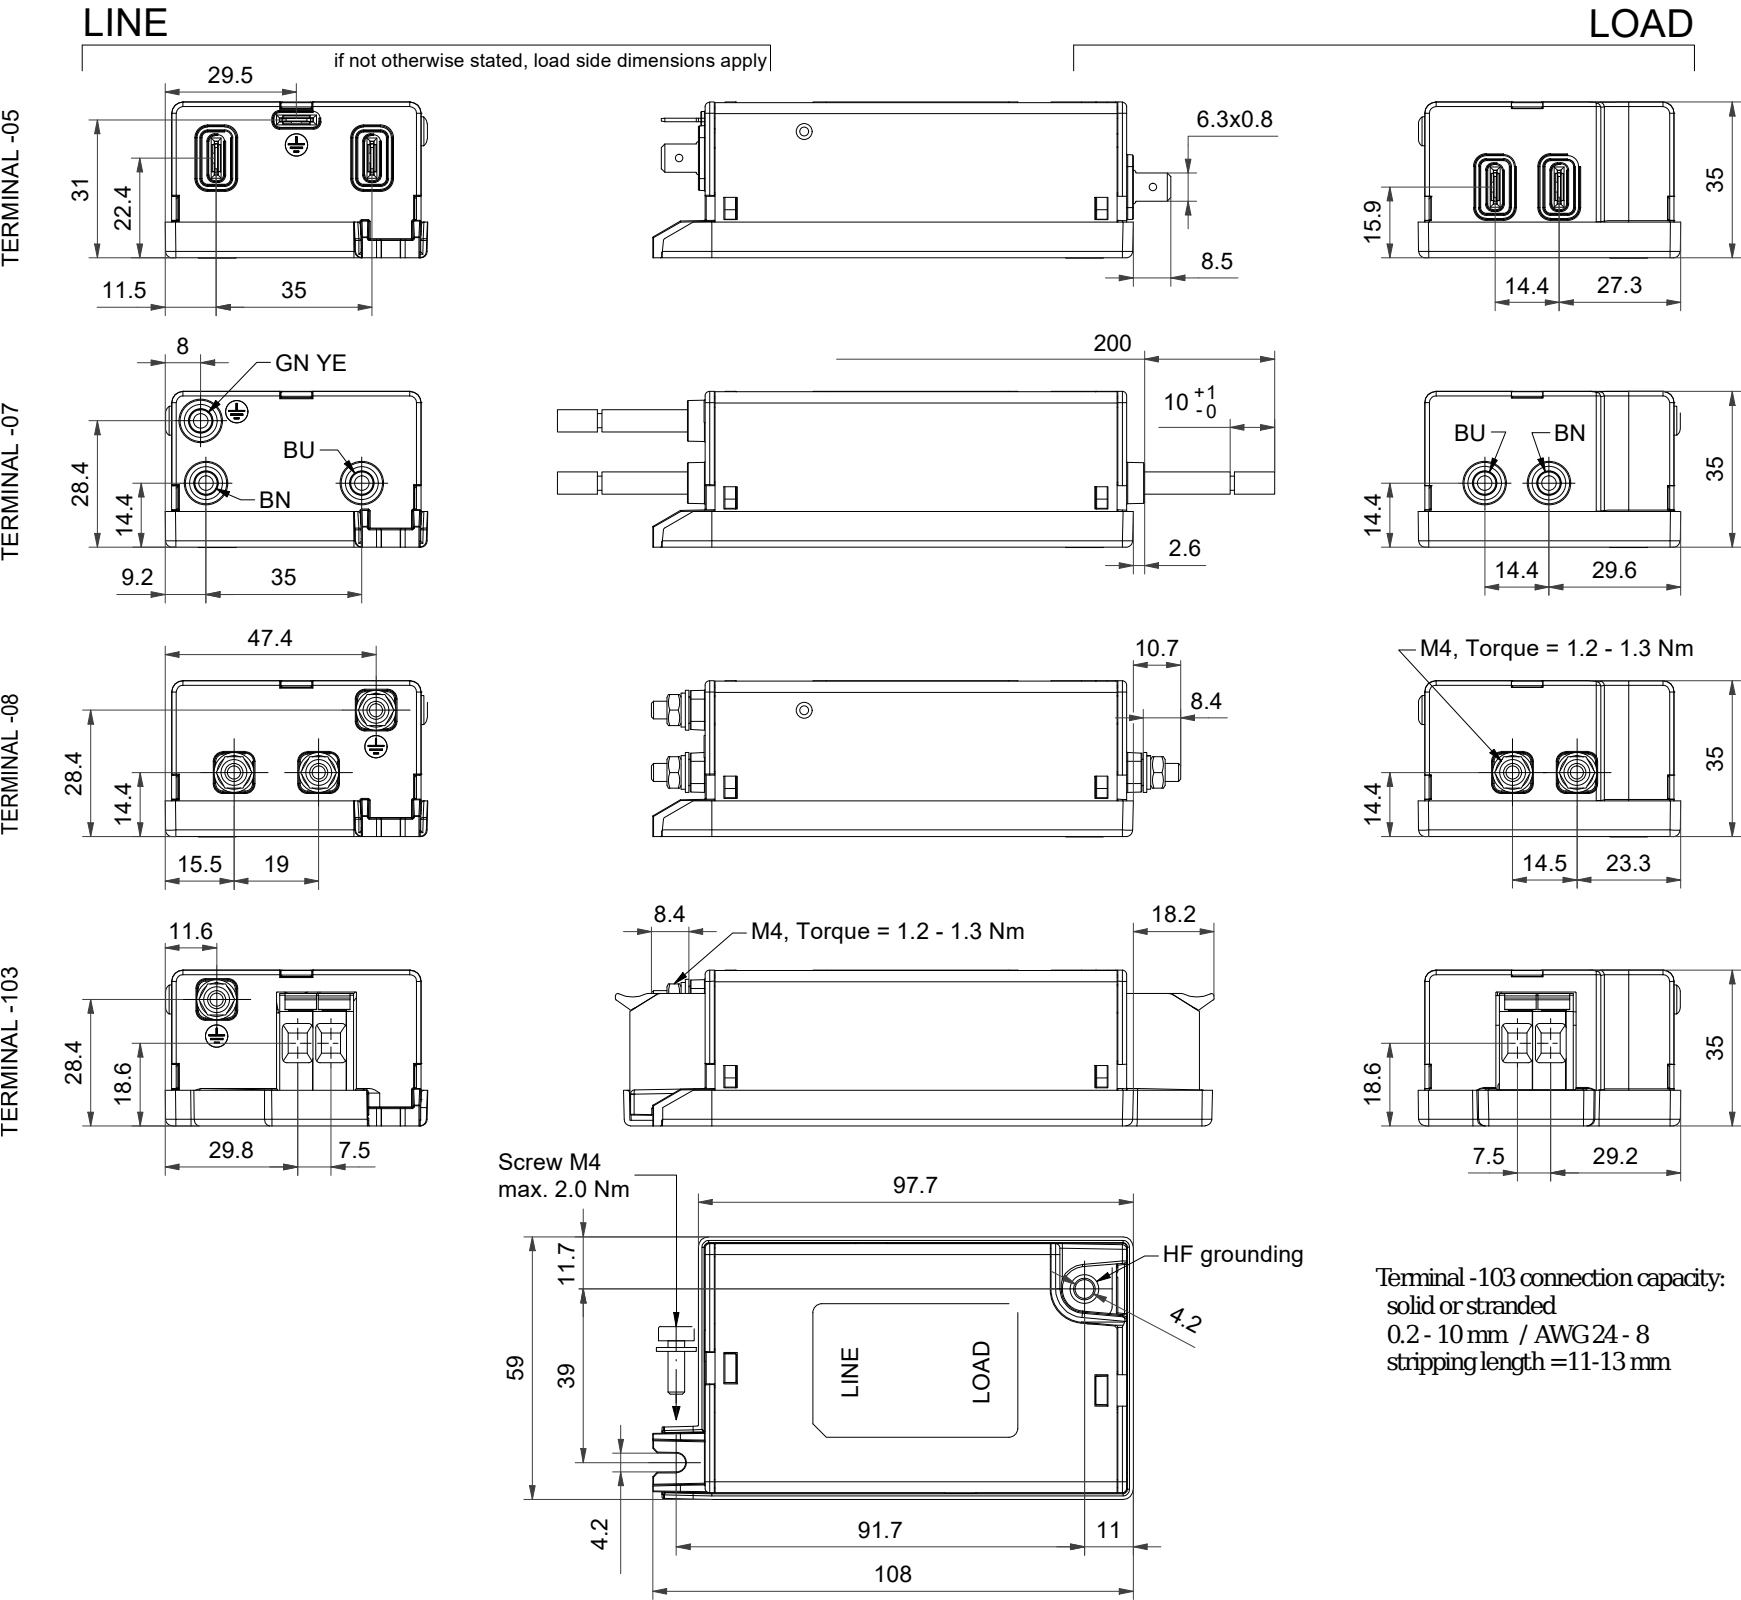

Dimensions FN2500 - 32 A - Single-stage Filter

For dimensions [mm] without tolerances: ISO2768-cL/EN22768-cL applies

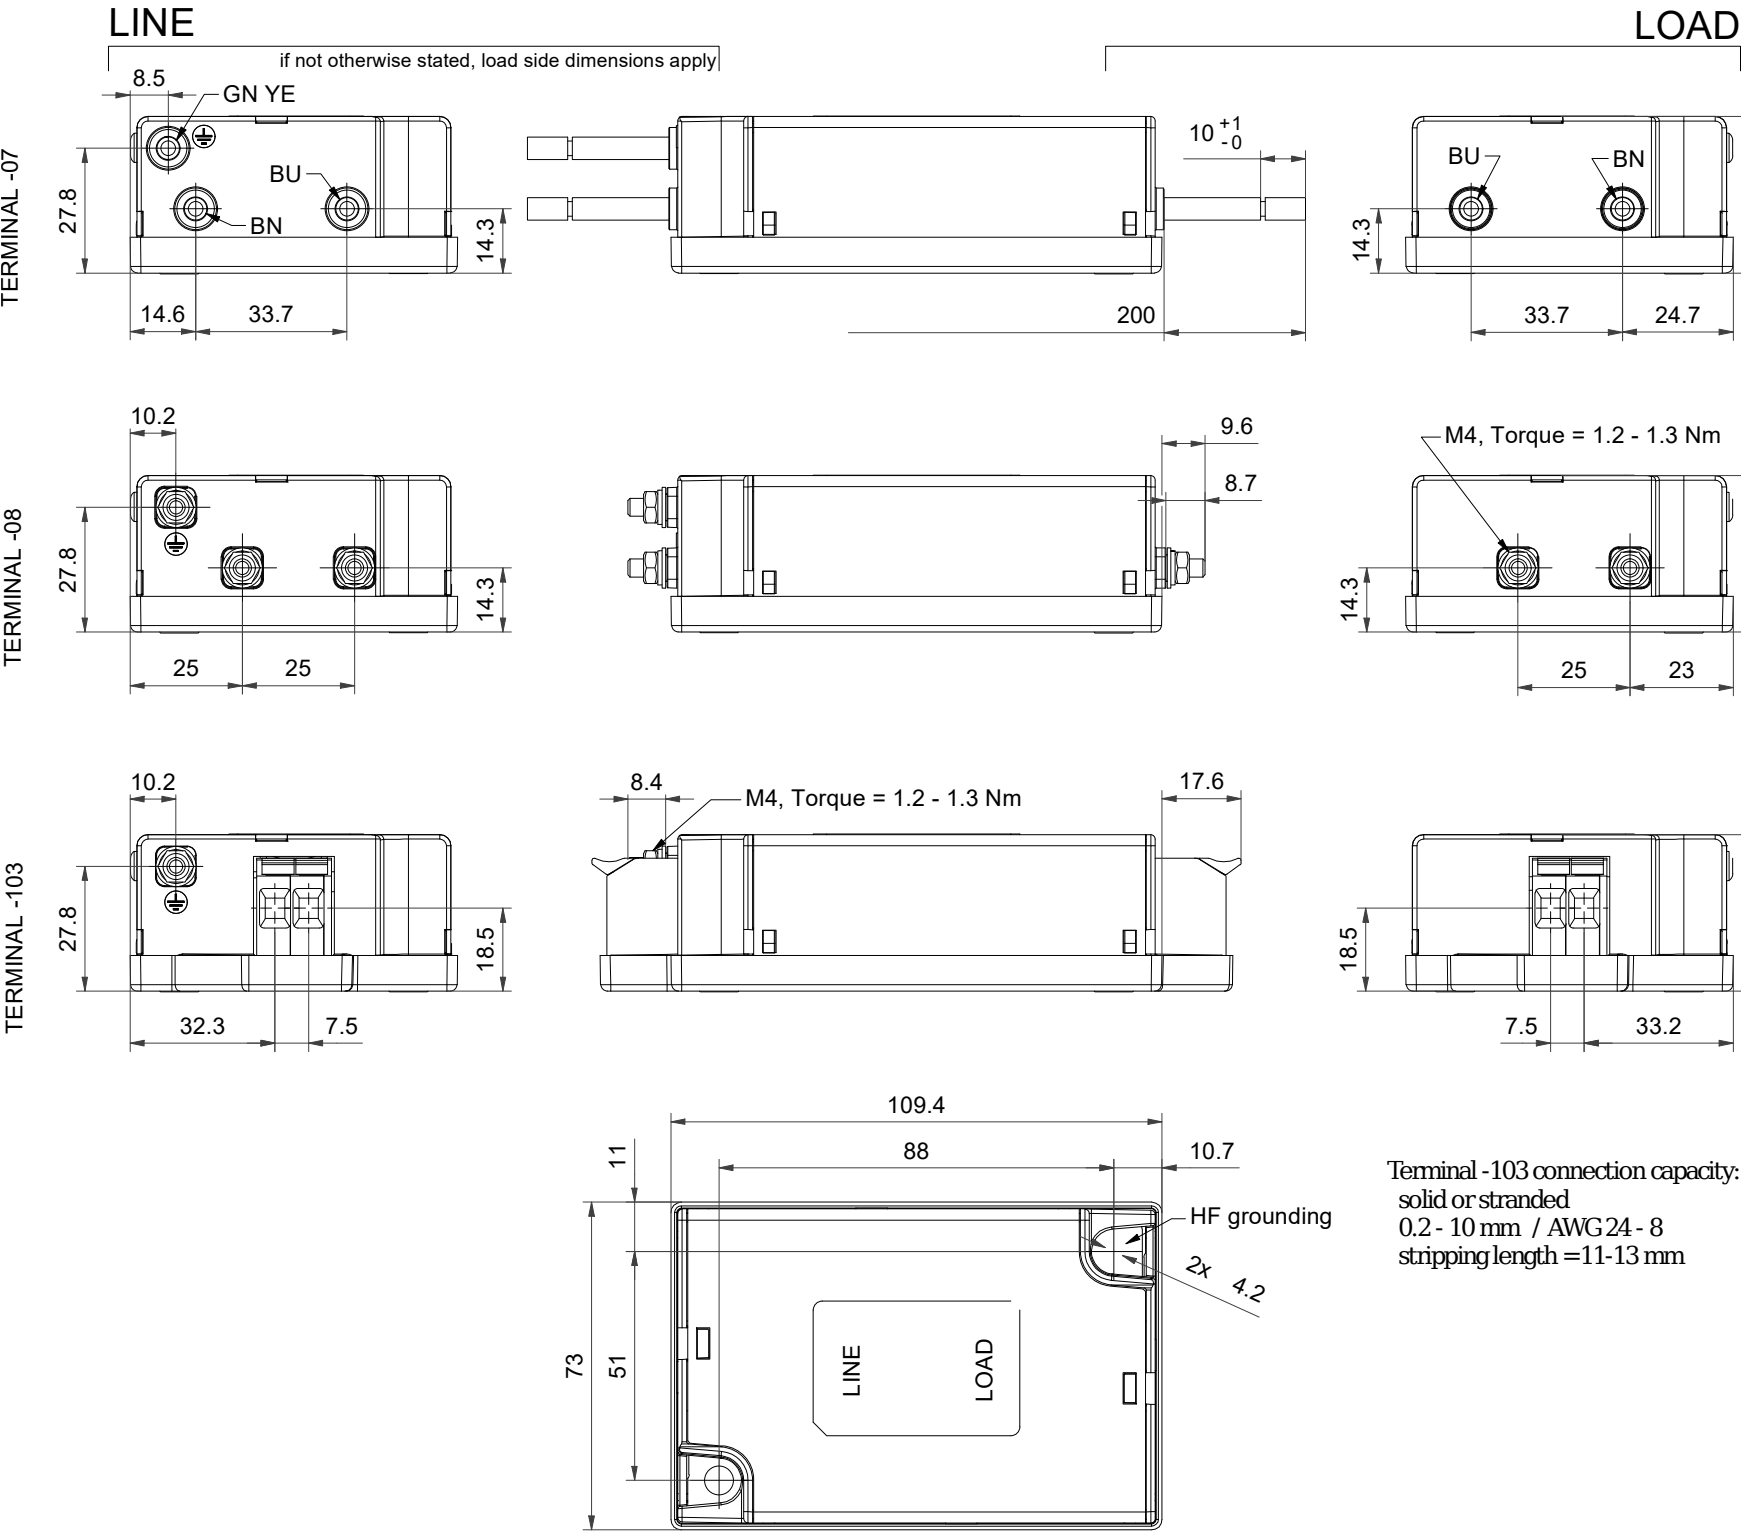

Headquarters, Global
Innovation and
Development

Switzerland
Schaffner Holding AG
Industrie Nord
Nordstrasse 11e
4542
Luterbach
+41 32 681 66 26
info@schaffner.com

To find your local partner within
Schaffner's global network [schaffner.com](https://www.schaffner.com)

© 2022 Schaffner Group

The content of this document has been carefully checked and understood. However, neither Schaffner nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Schaffner does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Swiss law and resulting disputes shall be settled by the courts at the place of business of Schaffner Holding AG. Latest publications and a complete disclaimer can be downloaded from the Schaffner website. All trademarks recognized.

Sales and Application
Centers

China
Schaffner EMC Ltd. Shanghai
T20-3 C, No 565 Chuangye Road,Pudong district
201201
Shanghai
+86 2138139500
cschina@schaffner.com

Finland
Schaffner Oy
Sauvonrinne 19 H
8500
Lohja
+358 50 468 7284
finlandsales@schaffner.com

France
Schaffner EMC S.A.S.
16-20 Rue Louis Rameau
95875
Bezons
+33 1 34 34 30 60
francesales@schaffner.com

Germany
Schaffner Deutschland GmbH
Schoemperlenstrasse 12B
76185
Karlsruhe
+49 721 56910
germanysales@schaffner.com

India
Schaffner India Pvt. Ltd
Regus World Trade Centre
WTC, 22nd Floor Unit No 2238, Brigade Gateway Campus, 26/1, Dr. Rajkumar Road Malleshwaram (W)
560055
Bangalore
+91 8067935355
indiasales@schaffner.com

Italy
Schaffner EMC S.r.l.
Via Ticino, 30
20900
Monza (MB)
+39 039 21 41 070
italysales@schaffner.com

Japan
Schaffner EMC K.K.
ISM Sangenjaya 7F
1-32-12 Kamiuma, Setagaya-ku
154-0011
Tokyo
+81 3 5712 3650
japansales@schaffner.com

Singapore
Schaffner EMC Pte Ltd.
Blk 3015A Ubi Road 1, #05-09, Kampong Ubi Industrial Estate
408705
Singapore
+65 63773283
singaporesales@schaffner.com

Spain
Schaffner EMC España
Calle Caléndula 93, Miniparc III, Edificio E El Soto de Moraleja, Alcobendas
28109
Madrid
+34 917 912 900
spainsales@schaffner.com

Sweden
Schaffner EMC AB
Östermalmstrorg 1
114 42
Stockholm
+46 8 5050 2425
swedensales@schaffner.com

Switzerland
Schaffner EMV AG
Industrie Nord
Nordstrasse 11e
4542
Luterbach
+41 32 681 66 26
switzerlandsales@schaffner.com

Taiwan
Schaffner EMV Ltd.
U-Town
20 Floor-2, No 97, Section 1, XinTai 5th Road, XiZhi District
22175
New Taipei City
+886 226975500
taiwansales@schaffner.com

Thailand
Schaffner EMC Co. Ltd.
Sathorn Square Tower
Room 3780, 37FL, 98 North-Sathorn Rd, Silom, Bangrak
10500
Bangkok
+66 621056397
thailandsales@schaffner.com

United Kingdom
Schaffner Ltd.
1, Oakmede Place
Terrace Road
RG42 4JF
Binfield
+44 118 9770070
uksales@schaffner.com

United States
Schaffner EMC Inc.
52 Mayfield Avenue
Edison, New Jersey
+1 732 225 9533
usasales@schaffner.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Schaffner:

[FN2500-10-05-C13](#) [FN2500-10-07-C13](#) [FN2500-10-08-C13](#) [FN2500-10-103-C13](#) [FN2500-15-05-C13](#) [FN2500-15-07-C13](#) [FN2500-15-08-C13](#) [FN2500-15-103-C13](#) [FN2500-20-05-C13](#) [FN2500-20-07-C13](#) [FN2500-20-08-C13](#) [FN2500-20-103-C13](#) [FN2500-25-07-C13](#) [FN2500-25-08-C13](#) [FN2500-25-103-C13](#) [FN2500-32-07-C13](#) [FN2500-32-08-C13](#) [FN2500-32-103-C13](#)