



Low Profile - High performance, EMC/EMI IEC inlet filter



Performance indicators

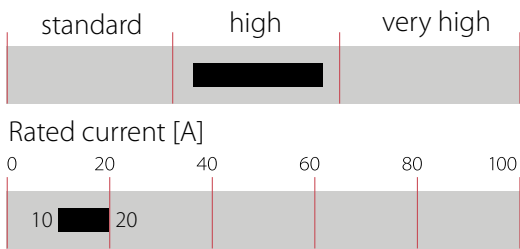

Approvals & Compliances



Certifications FN2660 pending

Features and benefits

- FN2640 series fits perfectly within 1HU height for rack mount
- The filters are built to fit perfectly to datacenter and audio video equipment
- The shape allows convenient and space-saving installation
- Fulfills the requirements in IEC/EN 62040-1 - Uninterruptible power systems (UPS)
- Fulfills the requirements in IEC 62368-1 - Audio/ Video, Information and Communication Technology Equipment
- Fulfills the requirements in IEC/EN 60335-1 - Household and similar appliances

Typical applications

- Robotics, collaborative robots, autonomous machines
- Audio and video equipment
- UPS - Uninterruptible power supplies

Technical specifications

Rated operating voltage	250 VAC
Operating frequency	DC to 60 Hz
Rated currents	10 to 20 A @ 40°C
Overload capability	1.5 x rated current for 1 minute once per hour
Cooling	Natural cooling AN
Climatic category	40/100/21 acc. IEC60068-1
Flammability according to	UL 94 V0
Surge withstand	2 kV Ph-Ph / 4 kV Ph-PE (Level 4)
High potential test voltage	P -> N 1500 VDC for 2 sec* P/N -> PE 2500 VDC for 2 sec*
Altitude	Derating above 2000 m
Certified to	UL 60939-3, GB/T 15287, IEC/EN 60939
MTBF	> 300,000 h
Protection category	IP00 / IP20 for -103 terminal
Pollution degree	2 acc. IEC 60664-1
Vibration and shock	3M12 acc. IEC 60721-3-3
Overvoltage category	II acc. IEC 60664-1
Temperature range (operation and storage)	-40°C to +100°C (with derating >50°C)

Filter Selection Table

Filter	Rated current	Leakage current*	Power loss	Inductance**	Capacitance**			Resistance**	Connections					Weight max****
	@ 40°C	@ 250 VAC/ 50 Hz	@ 25°C	L1	Cx1	Cx2	Cy1	R	line side	load side				
		(@ 120 VAC/ 60 Hz)												
	[A]	[mA]	[W]	[mH]	[µF]	[µF]	[nF]	[kΩ]	C14 C20					[kg]
Single-stage														
FN2640-10-yy-C11	10	0.37 (0.21)	5.2	8.3	1	0.47	4.7	680		-05	-07	-08	-103	0.3
FN2640-15-yy-C11	15	0.37 (0.21)	6.8	4.0	1	0.47	4.7	680		-05	-07	-08	-103	0.3
FN2640-16-yy-C11	16	0.37 (0.21)	7.6	4.0	1	0.47	4.7	680		-05	-07	-08	-103	0.3
FN2640-20-yy-C11	20	0.37 (0.21)	7.2	2.4	1	0.47	4.7	680		-05	-07	-08	-103	0.3

* Maximum leakage current under normal operating conditions. Note: if the neutral line is interrupted, worst case leakage current could reach twice this level.
** Tolerances apply: Inductance: -30/+50%, Capacitance: ±20%, Resistance: ±10%.
***Weight depending on choice of connectors.

Product selector


FN26tt-xx-yy-C11

11 – Y-capacitor option
11: 4.7 nF

yy – Load terminal type
05: fast-on 6.3 x 0.8 mm
07: wire leads
08: M4 screw
103: push-in terminal

xx – Rated current
10-20: 10 A – 20 A


tt – Product family
40: Single-stage filter L1

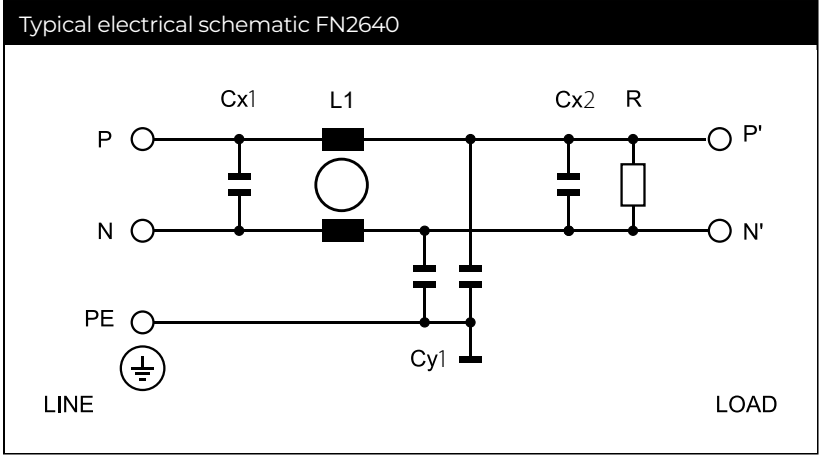


Typical Filter Attenuation

Per CISPR 17: symmetrical 50 Ω/50 Ω -> Differential Mode (DM); asymmetrical 50 Ω/50 Ω -> Common Mode (CM)


FN2640 - Single-stage filter

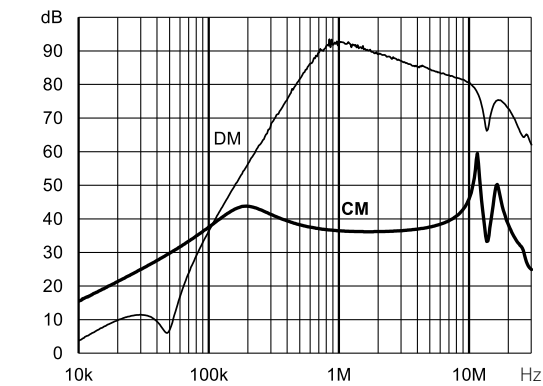

FN2640-10-yy-C11

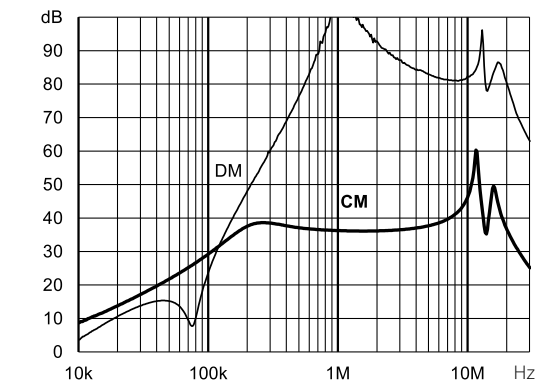


FN2640-15-yy-C11 & FN2640-16-yy-C11

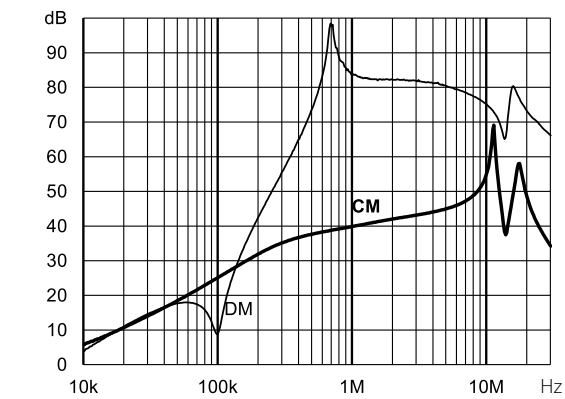

FN2640-20-yy-C11

Dimensions FN2640 - Single-stage Filter

For dimensions [mm] without tolerances: ISO2768-cL/EN22768-cL applies

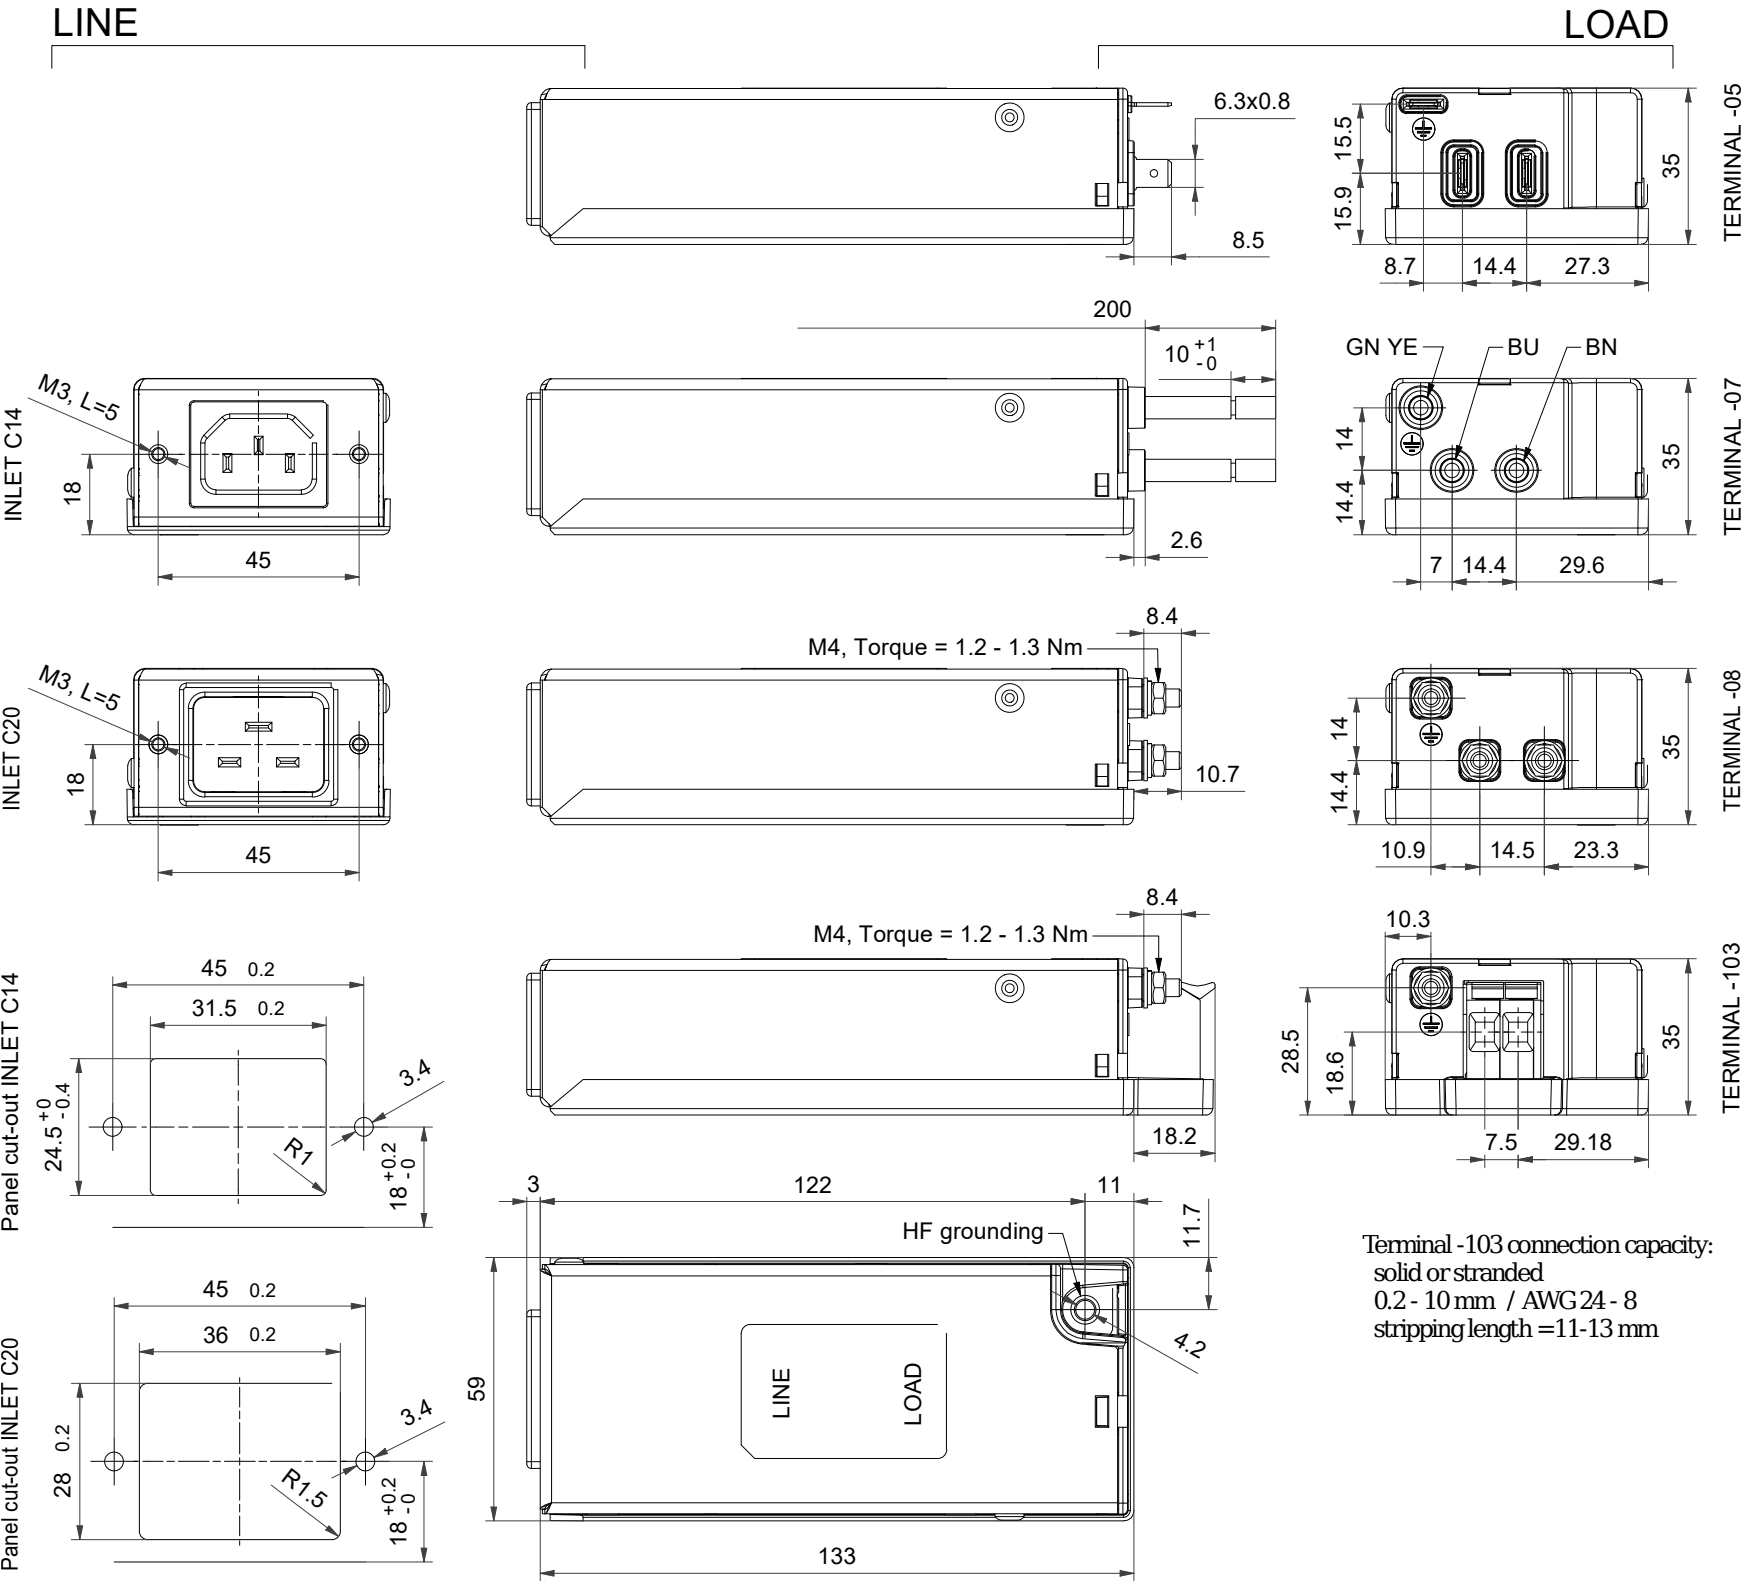

Headquarters, Global
Innovation and
Development

Switzerland
Schaffner Holding AG
Industrie Nord
Nordstrasse 11e
4542
Luterbach
+41 32 681 66 26
info@schaffner.com

To find your local partner within
Schaffner's global network schaffner.com

© 2022 Schaffner Group

The content of this document has been carefully checked and understood. However, neither Schaffner nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Schaffner does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Swiss law and resulting disputes shall be settled by the courts at the place of business of Schaffner Holding AG. Latest publications and a complete disclaimer can be downloaded from the Schaffner website. All trademarks recognized.

Sales and Application
Centers

China
Schaffner EMC Ltd. Shanghai
T20-3 C, No 565 Chuangye Road,Pudong district
201201
Shanghai
+86 2138139500
cschina@schaffner.com

Finland
Schaffner Oy
Sauvonrinne 19 H
8500
Lohja
+358 50 468 7284
finlandsales@schaffner.com

France
Schaffner EMC S.A.S.
16-20 Rue Louis Rameau
95875
Bezons
+33 1 34 34 30 60
francesales@schaffner.com

Germany
Schaffner Deutschland GmbH
Schoemperlenstrasse 12B
76185
Karlsruhe
+49 721 56910
germanysales@schaffner.com

India
Schaffner India Pvt. Ltd
Regus World Trade Centre
WTC, 22nd Floor Unit No 2238, Brigade Gateway Campus, 26/1, Dr. Rajkumar Road Malleshwaram (W)
560055
Bangalore
+91 8067935355
indiasales@schaffner.com

Italy
Schaffner EMC S.r.l.
Via Ticino, 30
20900
Monza (MB)
+39 039 21 41 070
italysales@schaffner.com

Japan
Schaffner EMC K.K.
ISM Sangenjaya 7F
1-32-12 Kamiuma, Setagaya-ku
154-0011
Tokyo
+81 3 5712 3650
japansales@schaffner.com

Singapore
Schaffner EMC Pte Ltd.
Blk 3015A Ubi Road 1, #05-09, Kampong Ubi Industrial Estate
408705
Singapore
+65 63773283
singaporesales@schaffner.com

Spain
Schaffner EMC España
Calle Caléndula 93, Miniparc III, Edificio E El Soto de Moraleja, Alcobendas
28109
Madrid
+34 917 912 900
spainsales@schaffner.com

Sweden
Schaffner EMC AB
Östermalmstrorg 1
114 42
Stockholm
+46 8 5050 2425
swedensales@schaffner.com

Switzerland
Schaffner EMV AG
Industrie Nord
Nordstrasse 11e
4542
Luterbach
+41 32 681 66 26
switzerlandsales@schaffner.com

Taiwan
Schaffner EMV Ltd.
U-Town
20 Floor-2, No 97, Section 1, XinTai 5th Road, XiZhi District
22175
New Taipei City
+886 226975500
taiwansales@schaffner.com

Thailand
Schaffner EMC Co. Ltd.
Sathorn Square Tower
Room 3780, 37FL, 98 North-Sathorn Rd, Silom, Bangrak
10500
Bangkok
+66 621056397
thailandsales@schaffner.com

United Kingdom
Schaffner Ltd.
1, Oakmede Place
Terrace Road
RG42 4JF
Binfield
+44 118 9770070
uksales@schaffner.com

United States
Schaffner EMC Inc.
52 Mayfield Avenue
Edison, New Jersey
+1 732 225 9533
usasales@schaffner.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Schaffner:

[FN2640-10-05-C11](#) [FN2640-10-07-C11](#) [FN2640-10-08-C11](#) [FN2640-10-103-C11](#) [FN2640-15-05-C11](#) [FN2640-15-07-C11](#) [FN2640-15-08-C11](#) [FN2640-15-103-C11](#) [FN2640-16-05-C11](#) [FN2640-16-07-C11](#) [FN2640-16-08-C11](#) [FN2640-16-103-C11](#) [FN2640-20-05-C11](#) [FN2640-20-07-C11](#) [FN2640-20-08-C11](#) [FN2640-20-103-C11](#)