

CFD4448

**SURFACE MOUNT  
ULTRA HIGH SPEED  
SILICON SWITCHING DIODE**




[www.centralsemi.com](http://www.centralsemi.com)

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR CFD4448 is an ultra high speed switching diode ideal for applications where very small size and operational efficiency are prime requirements.

**MARKING CODE: X**



Top View      Bottom View

## SOD-882L CASE

## APPLICATIONS:

- General Purpose Switching
- DC - DC Converters
- Flyback Diodes
- Polarity Protection
- Battery powered applications including  
Cell Phones, Digital Cameras, Pagers,  
PDAs, Laptop Computers, etc.

**MAXIMUM RATINGS:** ( $T_A=25^\circ\text{C}$ )

### Peak Repetitive Reverse Voltage

### Continuous Forward Current

### Peak Repetitive Forward Current

Peak Forward Surge Current, tp=1.0μs

Peak Forward Surge Current, tp=1.0s

## Power Dissipation

### Operating and Storage Junction Temperature

## Thermal Resistance

## FEATURES:

- Current ( $I_O=250\text{mA}$ )
- Forward Voltage Drop ( $V_F=0.91\text{V TYP @ 100mA}$ )
- Extremely Fast Switching Speed (4ns Max)
- Small TLP,  $1.0 \times 0.6 \times 0.4\text{mm}$ , Ultra Low Profile Leadless Surface Mount Package.

## SYMBOL

$V_{RRM}$	120	V
$I_F$	250	mA
$I_{FRM}$	500	mA
$I_{FSM}$	4.0	A
$I_{FSM}$	1.0	A
$P_D$	100	mW
$T_J, T_{stg}$	-65 to +175	°C
$\Theta_{JA}$	1500	°C/W

**ELECTRICAL CHARACTERISTICS: (TA=25°C unless otherwise noted)**




SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
$I_R$	$V_R=50V$			300	nA
$I_R$	$V_R=50V, T_A=125^\circ C$			100	$\mu A$
$I_R$	$V_R=100V$			500	nA
$BV_R$	$I_R=100\mu A$	120	150		V
$V_F$	$I_F=1.0mA$	0.55	0.59	0.65	V
$V_F$	$I_F=10mA$	0.67	0.72	0.77	V
$V_F$	$I_F=100mA$	0.85	0.91	1.0	V
$C_T$	$V_R=0, f=1.0MHz$			2.0	pF
$t_{rr}$	$I_R=I_F=10mA, I_{IT}=1.0mA, R_L=100\Omega$		2.0	4.0	ns

CFD4448

SURFACE MOUNT  
ULTRA HIGH SPEED  
SILICON SWITCHING DIODE

**Central**  
Semiconductor Corp.™

**SOD-882L CASE - MECHANICAL OUTLINE**

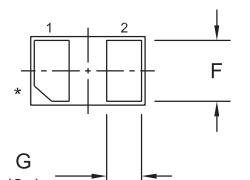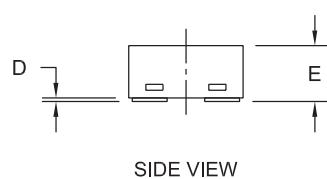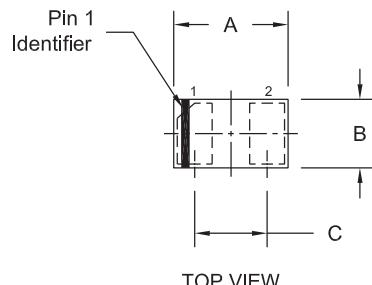

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.037	0.041	0.95	1.05
B	0.022	0.026	0.55	0.65
C		0.026		0.65
D	0.000	0.002	0.00	0.05
E	0.012	0.016	0.30	0.40
F	0.018	0.022	0.45	0.55
G	0.008	0.012	0.20	0.30

SOD-882L (REV:R2)

**LEAD CODE:**

- 1) Cathode
- 2) Anode

**MARKING CODE: X**

\* Pin 1 chamfer may appear on any corner.

R3 (28-September 2011)

[www.centralsemi.com](http://www.centralsemi.com)

## OUTSTANDING SUPPORT AND SUPERIOR SERVICES



---

### PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

---

### DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2<sup>nd</sup> day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

---

### REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix " TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix " PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

---

### CONTACT US

#### Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.

145 Adams Avenue

Hauppauge, NY 11788 USA

Main Tel: (631) 435-1110

Main Fax: (631) 435-1824

Support Team Fax: (631) 435-3388

[www.centralsemi.com](http://www.centralsemi.com)

#### Worldwide Field Representatives:

[www.centralsemi.com/wwreps](http://www.centralsemi.com/wwreps)

#### Worldwide Distributors:

[www.centralsemi.com/wwdistributors](http://www.centralsemi.com/wwdistributors)

---

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: [www.centralsemi.com/terms](http://www.centralsemi.com/terms)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Central Semiconductor:](#)

[CFD4448](#) [CFD4448 TR](#)