

- NOTES:
- 1. ALLOWABLE FLEXIBLE LIGHT PIPE CUT LENGTH AVAILABLE IN INCREMENTS OF 0.05".
 - 2. MINIMUM BEND RADIUS OF FLEXIBLE LIGHT PIPE: 0.87" [22mm].
 - 3. COMPONENTS SHIPPED NON-ASSEMBLED.
 - 4. MINIMUM 0.210" FIBER INSERTION INTO SMFLP.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	Engineering Release	1/29/2009	T.Y.
B	Updated Fiber To FLPS In BOM	11/14/2012	T.Y.
C	ECO-1241: Updated Recommended Mounting Holes	5/10/2024	A.V.




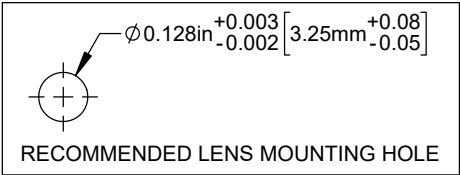


TABLE 1 - LENGTH	
LENGTH (L)*	TOLERANCE
1.00" - 16.00"	±0.05"
16.1" - 40.00"	±0.15"
40.1" - 80.00"	±0.30"
80.1" - 3,940.00"	±0.5%

*AVAILABLE IN 0.1" INCREMENTS

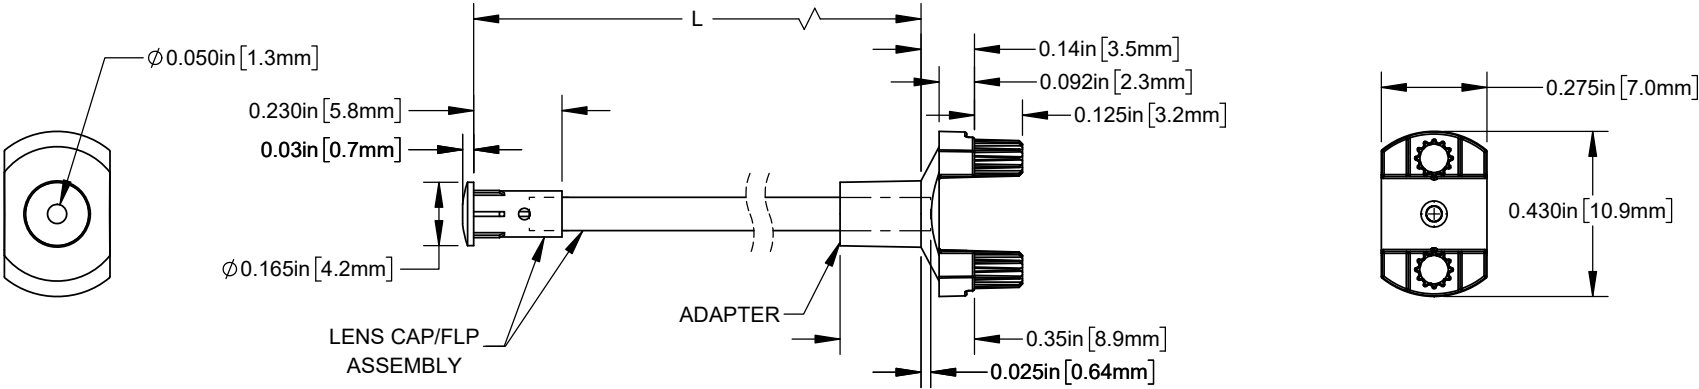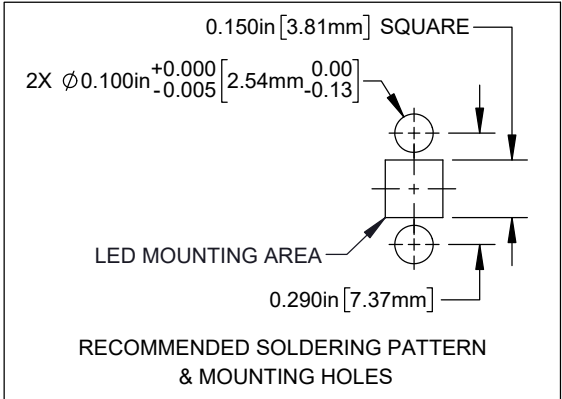

CUSTOMER USE DRAWING

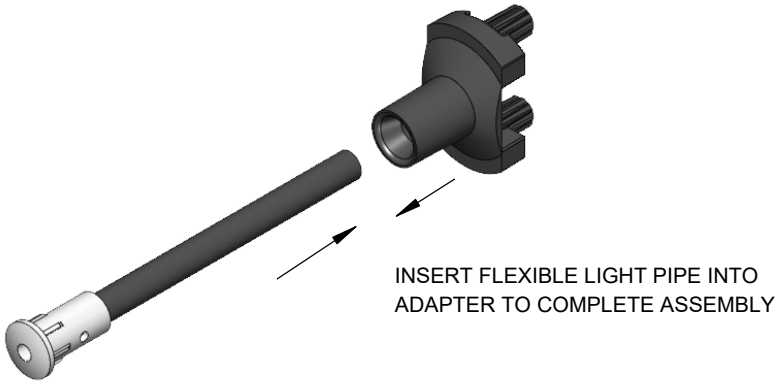

STANDARD TOLERANCE (UNLESS OTHERWISE SPECIFIED)		BIVAR [®] 4 THOMAS, IRVINE, CA. 92618 TEL: (949) 951-8808 FAX: (949) 951-3974	
DECIMALS	ANGULAR	TITLE: FLP ASSEMBLY WITH SMFLP ADAPTER, IR	
.X ± .1	X° ± 1°	DRAWING NO: SMFLPIR-X.X	
.XX ± .02		REVISION: C	
.XXX ± .010		SHEET SIZE A	CAGE CODE: 32559
DESIGNED: R. PAJE	DATE: 1/29/2009	SCALE: 2:1	SHEET # 1 OF 1
REVISED: K. BARON	DATE: 5/10/2024	CAD GENERATED DOCUMENT, DO NOT MEASURE DRAWING	
CHECKED: A. VALDEZ	DATE: 5/10/2024		