

# High Reliability NPN Silicon Phototransistor

OP604TXV, OP604S



## Features:

- Miniature hermetically sealed package
- Ideal for direct mounting to PC Board
- TXV & S level devices are processed to MIL-PRF-19500

## Description:

Each device in the **OP600** high reliability series consists of a high-reliability NPN silicon phototransistor that is mounted in a glass-lensed miniature hermetically sealed “pill” package with an 18° half angle, as measured from the optical axis to the half-power point.

After electrical testing by manufacturing, devices are processed to OPTEK’s 100 percent screening program, which is patterned after MIL-PRF-19500. *Components in the high reliability OP600 series are mechanically and spectrally matched to the OP223 and OP224 high reliability series of infrared emitting diodes.*


*TXV and S level devices are processed to OPTEK’s military screening program patterned after MIL-PRF-19500.*

Please refer to Application Bulletin 210 for additional thermal design information and to Application Bulletin 202 for pill-type soldering to PC Board.


## Applications:

- Non-contact reflective object sensor
- Assembly line automation
- Machine automation
- Machine safety
- End of travel sensor
- Door sensor
- High Voltage Isolation

Ordering Information				
Part Number	Light Current $I_{C(ON)}$ (mA) Min / Max	$V_{CE}$ (V) Typ / Max	Input Power $E_E$ (mW/cm <sup>2</sup> )	Viewing Angle
OP604S	7.00 / NA	5 / 50	20.0	35°
OP604TXV				



Pin #	Sensor
1	Collector
2	Emitter

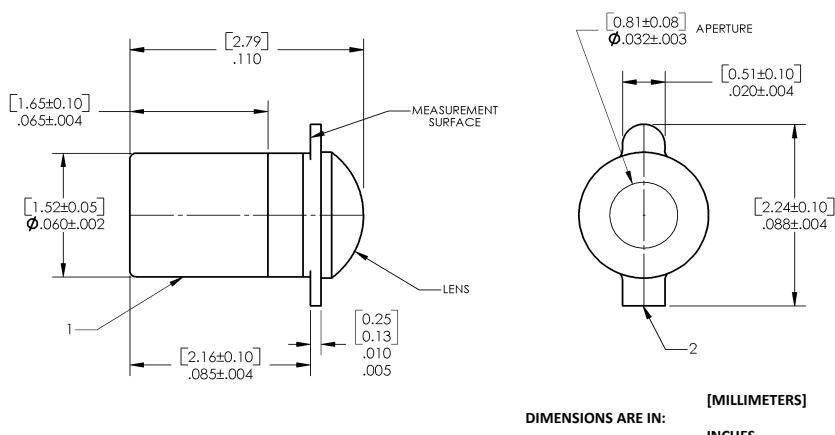

## General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

# High Reliability NPN Silicon Phototransistor

## OP604TXV, OP604S



## Electrical Specifications

### Absolute Maximum Ratings ( $T_A = 25^\circ C$ unless otherwise noted)

Storage Temperature Range	-65° C to +150° C
Operating Temperature Range	-55° C to +125° C
Collector-Emitter Voltage	50 V
Emitter-Collector Voltage	7 V
Soldering Temperature (5 seconds with soldering iron) <sup>(1)(2)</sup>	260° C
Power Dissipation <sup>(3)</sup>	50 mW

### Electrical Characteristics ( $T_A = 25^\circ C$ unless otherwise noted)

Input Diode						
SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
$I_{C(ON)}$ <sup>(4)(5)</sup>	On-State Collector Current	7	-	-	mA	$V_{CE} = 5.0$ V, $E_E = 20$ mW/cm <sup>2</sup>
$I_{CEO}$	Collector Dark Current	-	-	25	nA	$V_{CE} = 10.0$ V, $E_E = 0$
		-	-	100	μA	$V_{CE} = 30.0$ V, $E_E = 0$ , $T_A = 100^\circ C$
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	50	-	-	V	$I_C = 100$ μA, $E_E = 0$
$V_{(BR)ECO}$	Emitter-Collector Breakdown Voltage	7	-	-	V	$I_C = 100$ μA, $E_E = 0$
$V_{CE(SAT)}$	Collector-Emitter Saturation Voltage	-	-	0.4	V	$I_C = 0.4$ mA, $E_E = 20$ mW/cm <sup>2</sup>
$t_r$	Rise Time	-	-	20	μs	$V_{CC} = 30$ V, $I_C = 1.00$ mA, $R_L = 100$ Ω
$t_f$	Fall Time	-	-	20		

#### Notes:

- (1) Refer to Application Bulletin 202, which discusses proper techniques for soldering pill-type devices to PC Boards.
- (2) No clean or low solids. RMA flux is recommended. Duration can be extended to 10 seconds maximum when wave soldering.
- (3) Derate linearly 0.40 mW/° C above 25° C.
- (4) Junction temperature maintained at 25° C.
- (5) Light source is an unfiltered tungsten lamp operating at CT = 2870 K or equivalent source.


# High Reliability NPN Silicon Phototransistor

## OP604TXV, OP604S




### Typical Performance


Typical Spectral Response

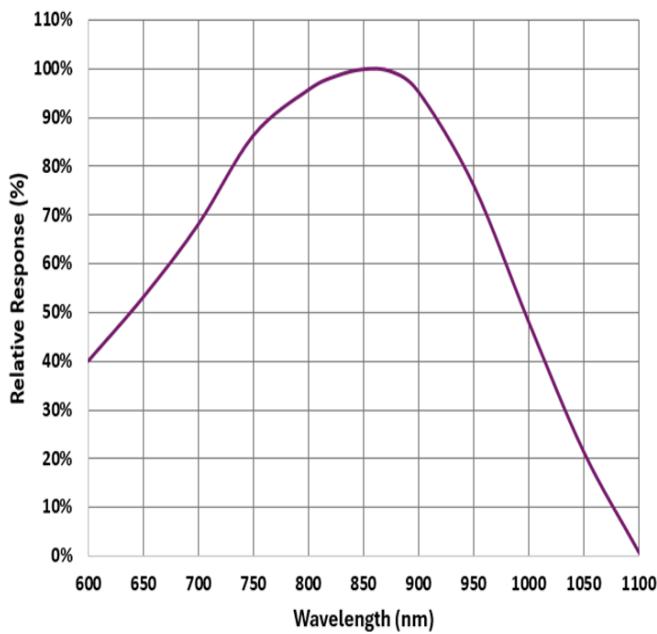


Collector Dark Current vs Temperature

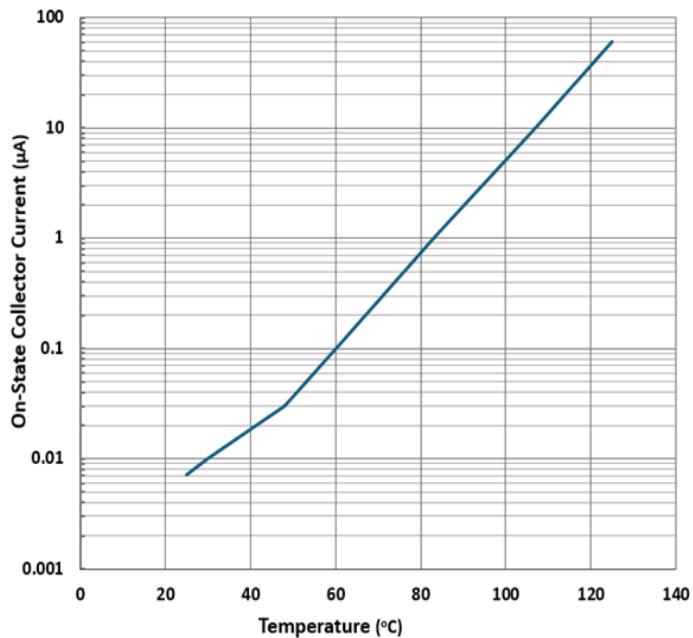

Rise and Fall Times vs Load Resistance

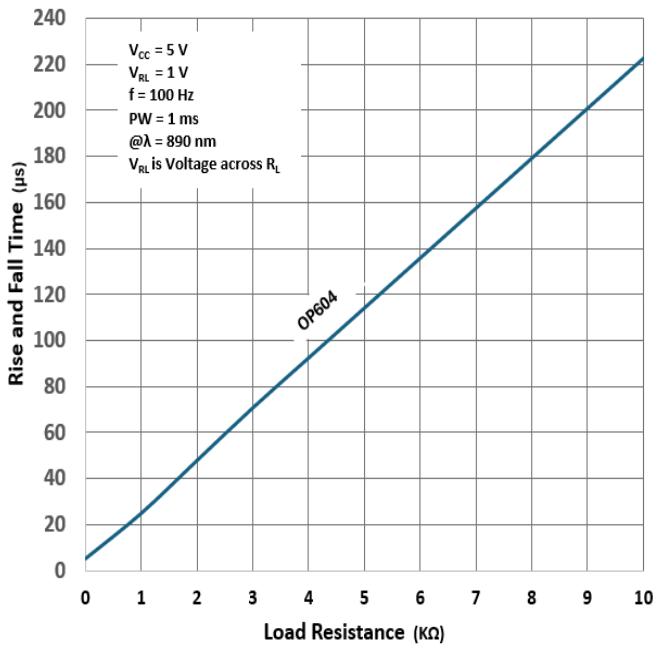

Normalized Collector Current vs Angular Displacement

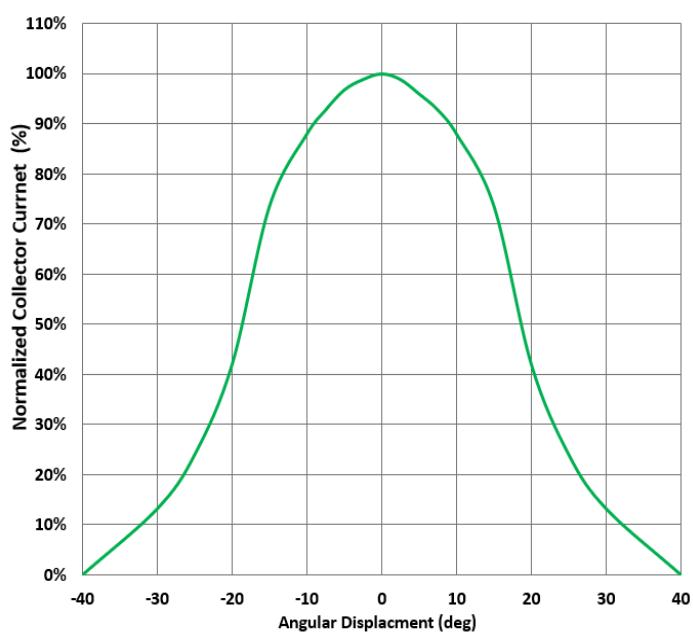

#### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT electronics plc

TT Electronics | OPTEK Technology  
2900 E. Plano Pkwy, Plano, TX 75074 | Ph: +1 972 323 2200  
www.ttelectronics.com | sensors@ttelectronics.com

Rev E 08/2025 Page 3