

# Product data sheet

Specifications



**safety module, Harmony XPS, estop or guard, connected to supply terminals 48 to 240V AC or DC , no inputs, screw**

XPSBAC34AP

**Product availability: Stock - Normally stocked in distribution facility**

## Main

Range of Product	Harmony Safety Automation
Product or Component Type	Safety module
Safety module name	XPSBAC
Safety module application	For emergency stop and protective guard applications
Function of module	Emergency stop button with 2 NC contacts Guard monitoring with 1 or 2 limit switches
Safety level	Can reach PL e/category 4 for normally open relay contact ISO 13849-1 Can reach SILCL 3 for normally open relay contact IEC 62061 Can reach SIL 3 for normally open relay contact IEC 61508 Can reach PL c/category 1 for normally closed relay contact ISO 13849-1 Can reach SILCL 1 for normally closed relay contact IEC 62061 Can reach SIL 1 for normally closed relay contact IEC 61508
Safety reliability data	MTTFd > 30 years for normally open relay contact ISO 13849-1 Dcavg >= 99 % for normally open relay contact ISO 13849-1 PFHd = 1.01E-09 for normally open relay contact ISO 13849-1 HFT = 1 for normally open relay contact IEC 62061 PFHd = 1.01E-09 for normally open relay contact IEC 62061 SFF > 99% for normally open relay contact IEC 62061 HFT = 1 for normally open relay contact IEC 61508-1 PFHd = 1.01E-09 for normally open relay contact IEC 61508-1 SFF > 99% for normally open relay contact IEC 61508-1 Type = B for normally open relay contact IEC 61508-1 MTTFd > 30 years for normally closed relay contact ISO 13849-1 DC > 60 % for normally closed relay contact ISO 13849-1 PFHd = 1.01E-09 for normally closed relay contact ISO 13849-1 HFT=0 for normally closed relay contact IEC 62061 PFHd = 1.01E-09 for normally closed relay contact IEC 62061 SFF > 60% for normally closed relay contact IEC 62061 HFT=0 for normally closed relay contact IEC 61508-1 PFHd = 1.01E-09 for normally closed relay contact IEC 61508-1 SFF > 60% for normally closed relay contact IEC 61508-1 Type = B for normally closed relay contact IEC 61508-1
Electrical circuit type	NC pair
Connections - terminals	Removable screw terminal block, 0.2...2.5 mm <sup>2</sup> solid or flexible Removable screw terminal block, 0.25...2.5 mm <sup>2</sup> flexible with ferrule single conductor Removable screw terminal block, 0.2...1.5 mm <sup>2</sup> solid or flexible twin conductor Removable screw terminal block, 2 x 0.25...1 mm <sup>2</sup> flexible with ferrule without cable end, with bezel Removable screw terminal block, 2 x 0.5...1.5 mm <sup>2</sup> flexible with ferrule with cable end, with bezel
[Us] Rated Supply Voltage	48...240 V AC - 15...10 % 48...240 V DC - 20...20 %

## Complementary

Synchronisation time between inputs	Unlimited
Type of start	Automatic/manual/monitored

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

<b>Power consumption in W</b>	2.0 W 48...240 V DC
<b>Power consumption in VA</b>	6.0 VA 48...240 V AC 50/60 Hz
<b>Input protection type</b>	Internal, electronic
<b>safety outputs</b>	4 NO + 1 NC
<b>safety inputs</b>	0
<b>Input compatibility</b>	Normally closed circuit ISO 14119 XC limit switch ISO 14119 Mechanical contact ISO 14119 Normally closed circuit ISO 13850
<b>input terminal</b>	Power supply
<b>[Ie] rated operational current</b>	5 A AC-1 for normally open relay contact 3 A AC-15 for normally open relay contact 5 A DC-1 for normally open relay contact 3 A DC-13 for normally open relay contact 3 A AC-1 for normally closed relay contact 1 A AC-15 for normally closed relay contact 3 A DC-1 for normally closed relay contact 1 A DC-13 for normally closed relay contact
<b>control outputs</b>	0
<b>[Ith] conventional free air thermal current</b>	6 A
<b>Associated fuse rating</b>	10 A gG NO relay output circuit IEC 60947-1
<b>Minimum output current</b>	10 mA relay output
<b>Minimum output voltage</b>	5 V relay output
<b>Response time</b>	60 ms at 48...240 V AC/DC
<b>[Ui] rated insulation voltage</b>	300 V 2)IEC 60947-1
<b>[Uiimp] rated impulse withstand voltage</b>	4 kV II IEC 60947-1
<b>Local signalling</b>	LED green power power ON LED red error error LED yellow state status LED yellow start1 start input LED yellow start2 start input
<b>Mounting Support</b>	35 mm symmetrical DIN rail
<b>Depth</b>	4.7 in (120 mm)
<b>Height</b>	3.9 in (100 mm)
<b>Width</b>	0.9 in (22.5 mm)
<b>Product Weight</b>	0.441 lb(US) (0.200 kg)

## Environment

<b>Ambient Air Temperature for Operation</b>	-13...131 °F (-25...55 °C)
<b>Standards</b>	IEC 60947-5-1 IEC 61508-1 functional safety standard IEC 61508-2 functional safety standard IEC 61508-3 functional safety standard IEC 61508-4 functional safety standard IEC 61508-5 functional safety standard IEC 61508-6 functional safety standard IEC 61508-7 functional safety standard ISO 13849-1 functional safety standard IEC 62061 functional safety standard
<b>Product Certifications</b>	TÜV cULus

IP degree of protection	IP20 terminals)IEC 60529 IP40 housing)IEC 60529 IP54 mounting area)IEC 60529
Relative Humidity	5...95 % non-condensing

## Ordering and shipping details

Category	US1SAF222477
Discount Schedule	SAF2
GTIN	3606482034020
Returnability	Yes
Country of origin	ID

## Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	2.56 in (6.500 cm)
Package 1 Width	5.83 in (14.800 cm)
Package 1 Length	6.10 in (15.500 cm)
Package weight(Lbs)	11.041 oz (313.000 g)
Unit Type of Package 2	S03
Number of Units in Package 2	16
Package 2 Height	11.81 in (30.000 cm)
Package 2 Width	11.81 in (30.000 cm)
Package 2 Length	15.75 in (40.000 cm)
Package 2 Weight	12.688 lb(US) (5.755 kg)



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle) **71**

Environmental Disclosure [Product Environmental Profile](#)

## Use Better

### Materials and Substances

Packaging made with recycled cardboard **Yes**

Packaging without single use plastic **No**

[EU RoHS Directive](#) **Pro-active compliance (Product out of EU RoHS legal scope)**

SCIP Number **152cf799-1df7-4892-81b4-4c890187f1d1**

REACH Regulation [REACH Declaration](#)

California proposition 65 **WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](#)**

## Use Again

### Repack and remanufacture

Circularity Profile [End of Life Information](#)

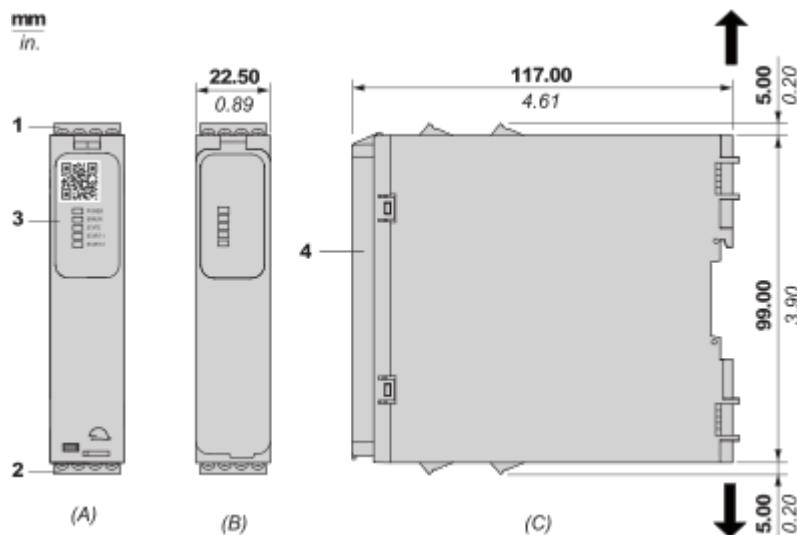
Take-back **No**

WEEE Label **The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.**

## Dimensions Drawings

## Dimensions

## Front and Side Views



(A) : Product drawing

(B) : Screw clamp terminal


(C) : Side view

(1) : Removable terminal blocks, top

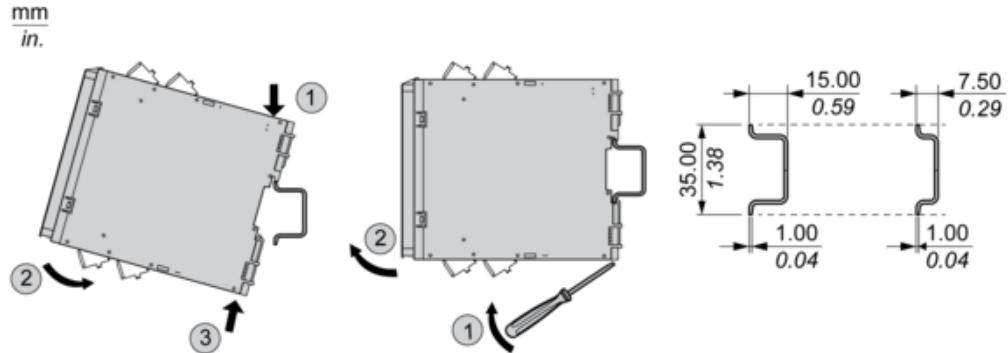
(2) : Removable terminal blocks, bottom

(3) : LED indicators

(4) : Sealable transparent cover

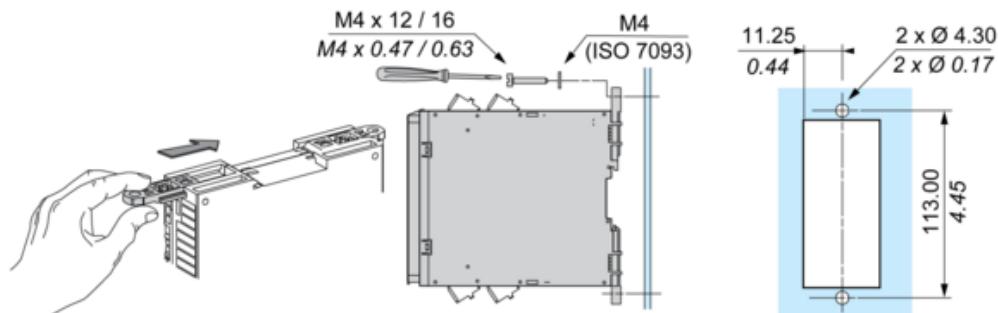
mm in.	7.0–8.0 0.28–0.31				
mm <sup>2</sup>	0,2... 2,5	0,25... 2,5	0,2... 1,5	0,25... 1	0,5... 1,5
AWG	24... 12	24... 12	24... 16	24... 18	20... 16
Ø 3,5 mm (0.14 in)	C			Nm lb-in	0.5... 0.6 4,4... 5,3

## Mounting and Clearance

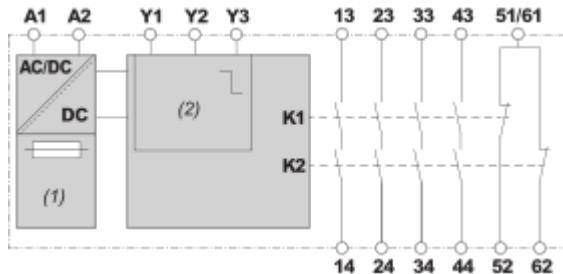
Mounting to DIN rail

Screw-mounting

mm  
in.



## Connections and Schema

Wiring Diagram

(1) : A1-A2 (Power supply)

(2) : Y1 (Control output of Start/Restart input), Y2 (Input channel for automatic/manual start/restart), Y3 (Input channel for monitored start/restart with falling edge)

13-14-23-24-33-34-43-44-51-52-61-62 : Terminals of the safety-related outputs

Image of product / Alternate images

Alternative

---

