

Product data sheet

Specifications



servo motor BCH, Lexium 28,
130mm, 300W, 6.91kg.cm², with oil
seal, with key, brake, straight
connection

BCH2MM0313CF6C

**Product availability: Non-Stock - Not normally stocked in
distribution facility**

Main

Range Compatibility	Lexium 28
Device short name	BCH2
Product or Component Type	Servo motor

Complementary

Maximum mechanical speed	3000 rpm
[Us] rated supply voltage	220 V 110 V
Phase	Three phase Single phase
Continuous stall current	1.88 A
Continuous stall torque	25.31 lbf.in (2.86 N.m) LXM26D 2.6 A, 220 V, single phase 25.31 lbf.in (2.86 N.m) LXM26D 2.6 A, 220 V, three phase 25.31 lbf.in (2.86 N.m) LXM28 2.6 A, 220 V, single phase 25.31 lbf.in (2.86 N.m) LXM28 2.6 A, 220 V, three phase 25.31 lbf.in (2.86 N.m) LXM28 5.7 A, 110 V, single phase
Continuous power	300 W
Peak stall torque	76.03 lbf.in (8.59 N.m) LXM26D 2.6 A, 220 V, single phase 76.03 lbf.in (8.59 N.m) LXM26D 2.6 A, 220 V, three phase 76.03 lbf.in (8.59 N.m) LXM28... 2.6 A, 220 V, single phase 76.03 lbf.in (8.59 N.m) LXM28... 2.6 A, 220 V, three phase 76.03 lbf.in (8.59 N.m) LXM28... 5.7 A, 110 V, single phase
Nominal output power	300 W LXM26D 2.6 A, 220 V, single phase 300 W LXM26D 2.6 A, 220 V, three phase 300 W LXM28... 2.6 A, 220 V, single phase 300 W LXM28... 2.6 A, 220 V, three phase 300 W LXM28... 5.7 A, 110 V, single phase
Nominal torque	25.31 lbf.in (2.86 N.m) LXM26D 2.6 A, 220 V, single phase 25.31 lbf.in (2.86 N.m) LXM26D 2.6 A, 220 V, three phase 25.31 lbf.in (2.86 N.m) LXM28... 2.6 A, 220 V, single phase 25.31 lbf.in (2.86 N.m) LXM28... 2.6 A, 220 V, three phase 25.31 lbf.in (2.86 N.m) LXM28... 5.7 A, 110 V, single phase
Nominal speed	1000 rpm LXM26D 2.6 A, 220 V, single phase 1000 rpm LXM26D 2.6 A, 220 V, three phase 1000 rpm LXM28... 2.6 A, 220 V, single phase 1000 rpm LXM28... 2.6 A, 220 V, three phase 1000 rpm LXM28... 5.7 A, 110 V, single phase
Maximum current Irms	5.98 A LXM28... 0.3 kW, 220 V 5.98 A LXM28... 0.3 kW, 110 V
Maximum permanent current	2.09 A

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Product compatibility	LXM26D servo drive 0.3 kW, 220 V, single phase LXM26D servo drive 0.3 kW, 220 V, three phase LXM28... servo drive 0.3 kW, 220 V, single phase LXM28... servo drive 0.3 kW, 220 V, three phase LXM28... servo drive 0.3 kW, 110 V, single phase
Shaft end	Keyed
Shaft diameter	0.9 in (22 mm)
Shaft length	1.8 in (45 mm)
key width	0.3 in (8 mm)
Feedback type	20 bits single turn absolute encoder
Holding brake	With
Holding torque	85.0 lbf.in (9.6 N.m) built-in
Mounting Support	Asian standard flange
Motor flange size	5.1 in (130 mm)
Electrical connection	Connector MIL
Torque constant	1.52 N.m/A 68 °F (20 °C)
Back emf constant	92 V/krpm 68 °F (20 °C)
Number of motor poles	5.0
Rotor inertia	6.91 kg.cm ²
Stator resistance	1.93 Ohm 68 °F (20 °C)
Stator inductance	23.91 mH 68 °F (20 °C)
Stator electrical time constant	12.9 ms 68 °F (20 °C)
Maximum radial force Fr	670 N 1000 rpm
Maximum axial force Fa	200 N
Brake pull-in power	19.7 W
Type of cooling	Natural convection
Length	7.2 in (183 mm)
Number of motor stacks	1
Centring collar diameter	4.3 in (110 mm)
Centring collar depth	0.3 in (8 mm)
Number of mounting holes	4
Mounting holes diameter	0.4 in (9.2 mm)
Circle diameter of the mounting holes	5.7 in (145 mm)
Distance shaft shoulder-flange	0.3 in (8 mm)
Product Weight	18.08 lb(US) (8.2 kg)
Sizing reference	BCH2
Network number of phases	1
Accuracy error [angular]	0.044 °
Temperature copper hot	275 °F (135 °C)
Temperature magnet hot	212 °F (100 °C)
Temperature magnet rt	68 °F (20 °C)

Environment

IP Degree of Protection	IP50 IM V3 IP65 IM B5, IM V1
--------------------------------	---------------------------------

Ambient Air Temperature for Operation	32...104 °F (0...40 °C)
--	-------------------------

Ordering and shipping details

Category	US1PC5318281
-----------------	--------------

Discount Schedule	PC53
--------------------------	------

GTIN	3606480734519
-------------	---------------

Returnability	No
----------------------	----

Country of origin	CN
--------------------------	----

Packing Units

Unit Type of Package 1	PCE
-------------------------------	-----

Nbr. of units in pkg.	1
------------------------------	---

Package 1 Height	7.48 in (19.000 cm)
-------------------------	---------------------

Package 1 Width	9.45 in (24.000 cm)
------------------------	---------------------

Package 1 Length	14.25 in (36.200 cm)
-------------------------	----------------------

Package weight(Lbs)	19.720 lb(US) (8.945 kg)
----------------------------	--------------------------



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle) **1679**

Environmental Disclosure [Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard **No**

Packaging without single use plastic **No**

[EU RoHS Directive](#) Pro-active compliance (Product out of EU RoHS legal scope)

REACH Regulation [REACH Declaration](#)

California proposition 65 **WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov**

Use Again

Repack and remanufacture


Circularity Profile [End of Life Information](#)

Take-back **No**

Dimensions Drawings

Dimensions

Dimensions of Motor

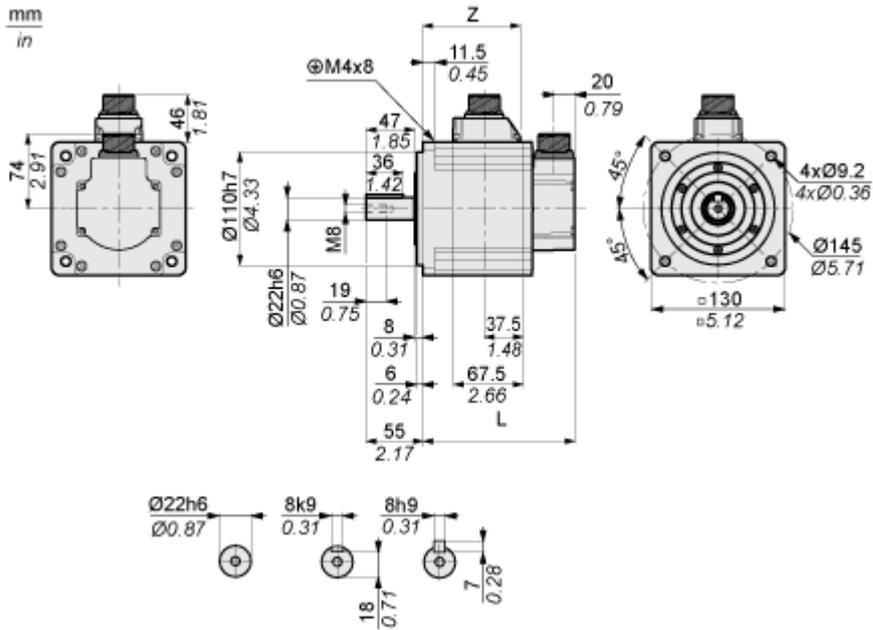


	mm	in.
L (without holding brake)	147	5.79
L (with holding brake)	183	7.2
Z	94.5	3.72

Performance Curves

Torque/Speed Curves with 230 V Single/Three Phase Supply Voltage

Servo Motor with LXM28AU04 Servo Drive

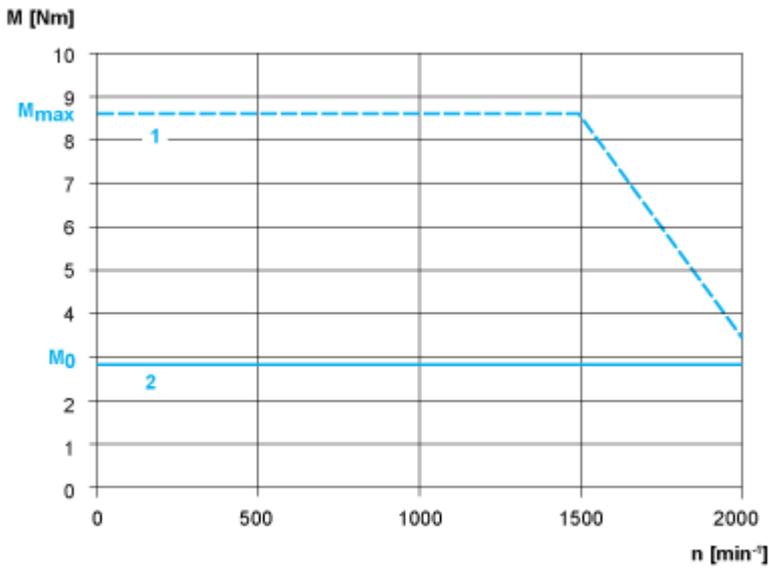

- 1 : Peak torque
- 2 : Continuous torque