

Product data sheet

Specifications



Manual starter, integral horsepower,
NEMA M1, 600VAC, 3 pole, 10HP
at 380/575VAC, 3 phase, no
indicator, NEMA 4/4X

2510MCW13

Main

Product	Manual Starter
Type	M
NEMA Size	M-1

Complementary

Control Unit	Push-button
Pilot Light	No indicator
Horsepower Rating	7.5 hp at 200...230 V AC, 3 phases 10 hp at 380...575 V AC, 3 phases
Voltage Rating	600 V AC
Number of Poles	3P
Starter Type	Non reversing
Electrical Connection	Pressure wire clamp
Overload Relay Type	Melting alloy
Number of Thermal Units Required	3
Wire Gauge	AWG 14...AWG 8 copper
Auxiliary Contacts	Without
Height	277.37 mm
Width	146.81 mm
Depth	146.30 mm

Environment

Certifications	CSA LR60905 class 3211 05 UL listed file E42243 CCN NLRV
NEMA Enclosure Rating	NEMA 4/4X brushed stainless steel

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	15.5 cm
Package 1 Width	17.0 cm
Package 1 Length	29.2 cm
Package 1 Weight	3.46 kg

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Contractual warranty

Warranty	18 months
----------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Use Better


 Materials and Substances	
Packaging made with recycled cardboard	No
Packaging without single use plastic	No
EU RoHS Directive	Compliant with Exemptions
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
PVC free	Yes

Use Again

 Repack and remanufacture	
Take-back	No
WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Technical Illustration

Wiring diagram

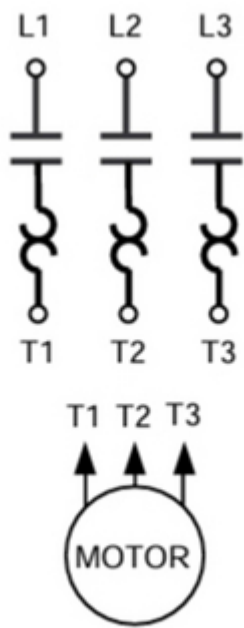

3-Pole, 3-Phase