

# SOLID STATE RELAY MAXIMUM LOAD CURRENT 1A

## SJ Series


RoHS Compliant



### ■ FEATURES

- Extremely small and light weight
  - Size: 10.0 (W) × 20.2 (L) × 12.8 (H) mm
  - Weight: approximately 5.5g
- High reliability, long life and maintenance free
- High isolation (between input and output)
  - Dielectric strength: 2,500Vrms
- Compatible with JY Relay in size and terminal arrangement
- RoHS compliant

Note: The piece-parts used in this relay contains lead but they are excluded from controlled substances.

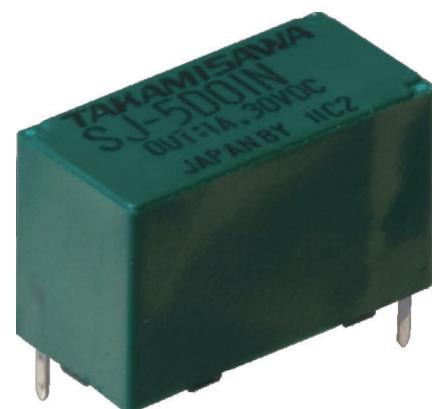

### ■ APPLICATIONS

FA equipment, measurement equipment etc.

### ■ PART NUMBERS





[Example] SJ - 12 D 01 Hz R N - NV  
 (a) (b) (c) (d) (e) (f) (g) (h)

(a)	Relay type	SJ series	
(b)	Nominal voltage (input side)	3	: 3VDC (only AC type)
		5	: 5VDC
		12	: 12VDC
		24	: 24VDC
(c)	Load voltage	A	: AC type
		D	: DC type
(d)	Load current	01	: 1A
(e)	Kind of inverse connection protecting element (only DC type)	Nil	: Diode type
		Hz	: Zener diode type
(f)	Output polarity (DC type)	Nil	: Standard polarity
		R	: Reverse polarity
(g)	Terminal classification	N	: PC board mounting
(h)	Kind of inverse connection protecting element (AC type)	NV	: Without varistor

## ■ SPECIFICATIONS

Item		Specifications		Remarks/Conditions
		AC	DC	
Input side	Nominal voltage	3, 5, 12, 24VDC	5, 12, 24VDC	
	Operate range	± 20% of nominal voltage		
	Must operate voltage	80% of nominal voltage		
	Must release voltage	Min. 1V (3VDC type: Min. 0.5V)		
	Input impedance	3VDC type	130Ω ± 10%	-
		5VDC type	330Ω ± 10%	430Ω ± 10%
		12VDC type	1,000Ω ± 10%	1,200Ω ± 10%
		24VDC type	2,200Ω ± 10%	2,400Ω ± 10%
Output side	Load voltage range	24 to 265Vrms	3 to 30VDC	
	Maximum load current	1.0Arms	1.0A	Please refer to characteristic data
	Minimum load current	10mA rms	1mA	Reference
	1 cycle surge current	50A (60Hz)	3A (10ms)	
	Max. off-state leakage current		0.75mA rms max. (at 100Vrms 60Hz) 1.50mA rms max. (at 200Vrms 60Hz)	0.1mA max. (at 30VDC)
	Max. on-state voltage drop	1.2Vrms	1.2V	At max. load current
Coil data	Operating temperature range	-30°C to +85°C		
	Storage temperature range	-40°C to +100°C		
Timing data	Maximum operate time	1ms		
	Maximum release time	1/2 cycle + 1ms	1ms	
Insulation	Initial resistance	Min. 1,000MΩ (500VDC) (input-output)		
	Surge voltage	2,500Vrms 1 min. (input-output)		
Others	Case color	Black	Green	
	Dimensions / weight	10.0×20.2×12.8 mm / Approximately 5.5g		


## ■ BLOCK DIAGRAM

Load	Insulation	Circuit	Input/Output Waveform (resistive load)
AC type	Phototriac coupler		
DC type	Photo transistor coupler		

## ■ DIMENSIONS

**SJ-( )A AC type**


- Dimensions

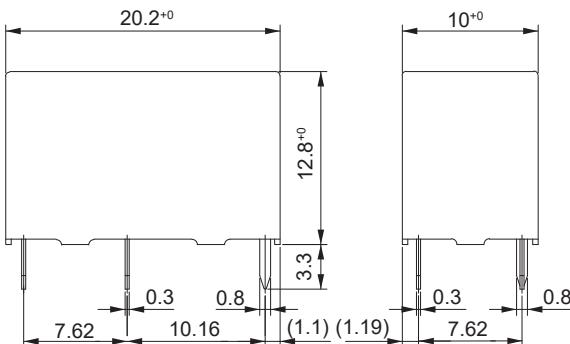

- Schematics  
(Bottom View)




- PC board mounting hole layout (Bottom View)

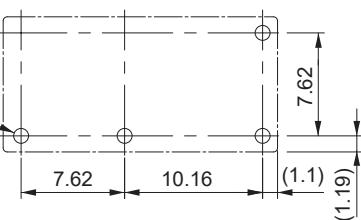


**SJ-( )D DC type**


- Dimensions

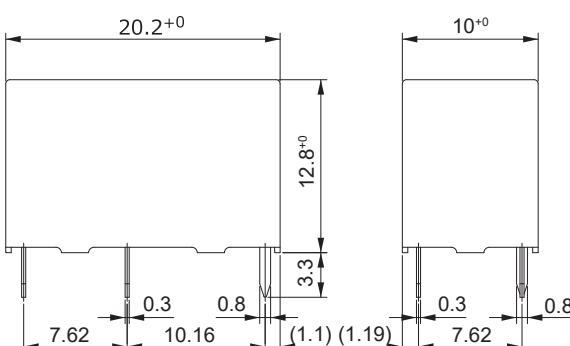

- Schematics  
(Bottom View)



- PC board mounting hole layout (Bottom View)

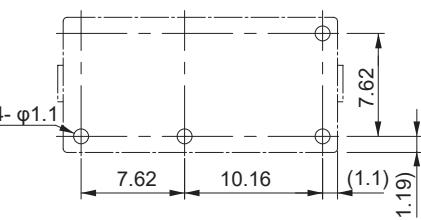

\* Output terminal reverse polarity type is available.

### Notes:

1. Polarity of terminals are pre-determined. Please design your circuit accordingly.
2. Dimensions of the terminals do not include thickness of pre-solder.
3. Tolerance of PC board mounting hole layout is  $\pm 0.1$ .

( ) : Reference  
Unit: mm

## ■ SAFETY STANDARDS

Type	Compliance	Contact Rating
UL	UL508 File No. 45026	1.0A, 265Vrms (resistive) 0.5A, 265Vrms (resistive) 1.0A, 30VDC (resistive)












## ■ PART NUMBER LIST

( ): Input side nominal voltage (Example: SJ-3A01N-NV)

Part Number	Load Voltage	Protecting Element	Output Polarity	Note
SJ-( )A01N-NV	AC	None	-	-
SJ-( )D01N		Diode	Standard polarity	Input side 3VDC is not available
SJ-( )D01RN			Reverse polarity	
SJ-( )D01HZN		Zener diode	Standard polarity	
SJ-( )D01HZRN			Reverse polarity	

## ■ CHARACTERISTIC DATA

(Characteristic data is not guaranteed value but measured values of samples from production line.)

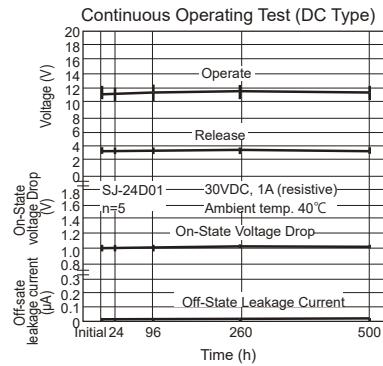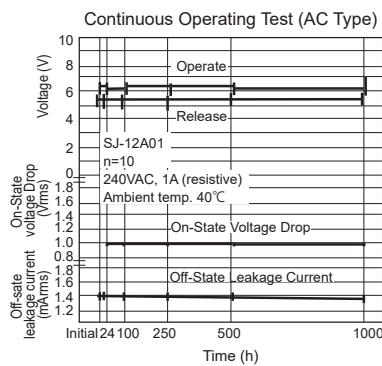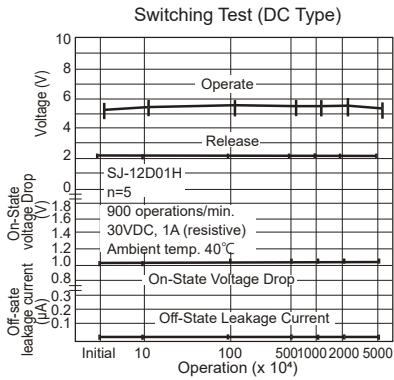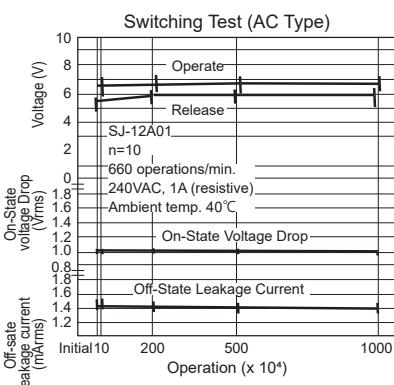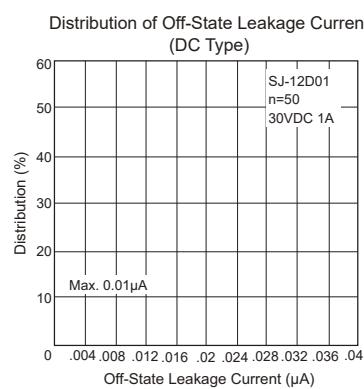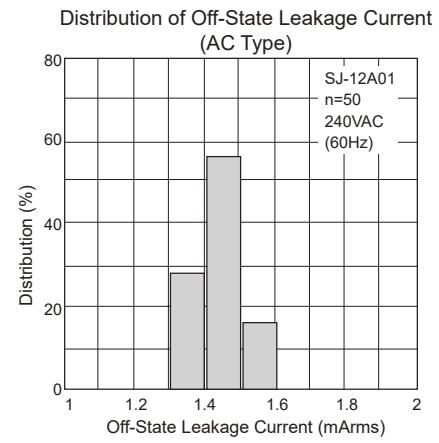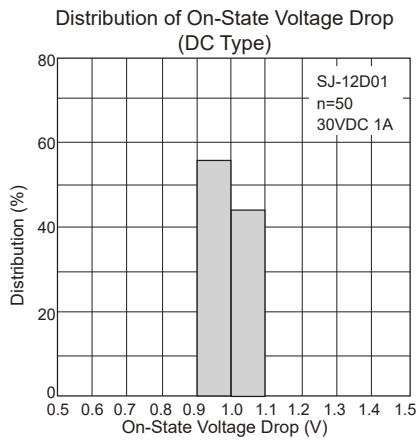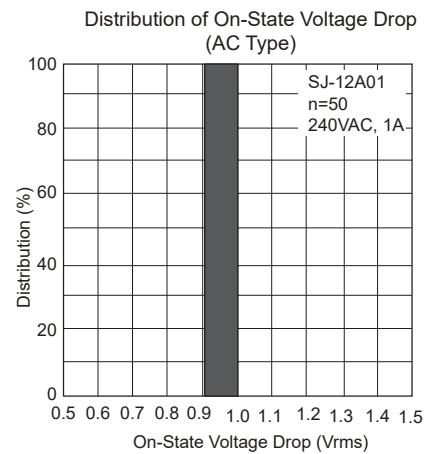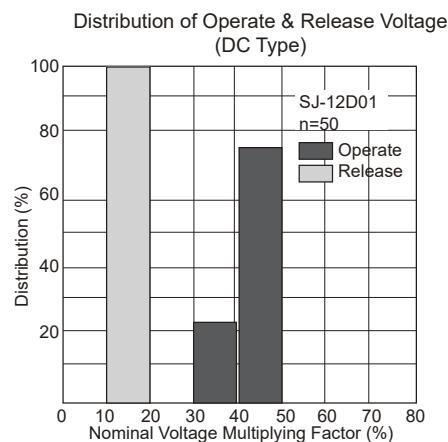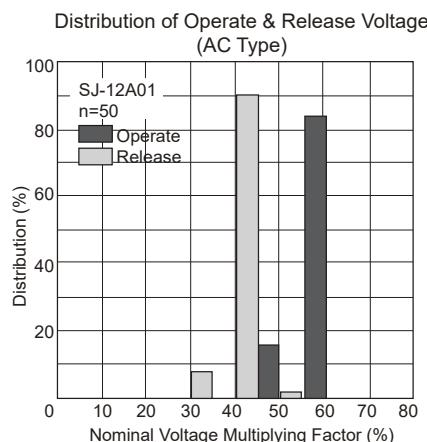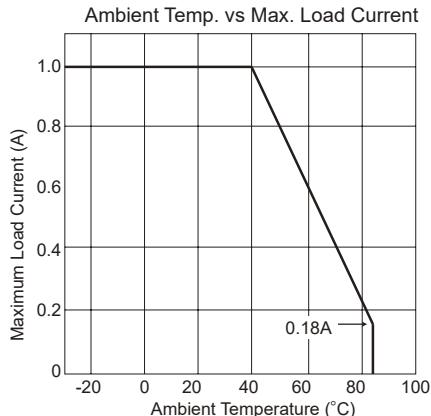


## CAUTIONS

- All values mentioned in this datasheet are provided under ideal conditions. Please perform the confirmation test before actual use.
- Reflow soldering is prohibited.
- Do not use relays in the atmosphere with sulfide gas, chloride gas or nitric oxide. Contact resistance may increase.
- Do not use silicon or silicon-containing product or materials near relays. It may cause contact failure.
- Please connect a varistor as below to switch inductive load with SJ AC type without varistor relays.

Recommended varistor

Varistor voltage : 470V to 510V  
Maximum energy : Minimum 4J  
Maximum allowable voltage : 300VACrms

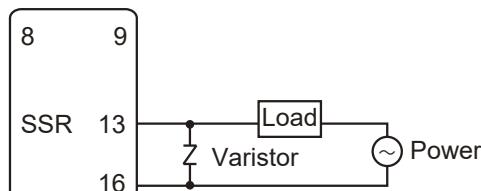

## GENERAL INFORMATION

### 1. ROHS Compliance

- All relays produced by FCL Components are compliant with RoHS directive 2011/65/EU, including commission delegated directive 2015/863.

### 2. Recommended lead free solder condition

- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified. This material has been verified to be compatible with PbSn assembly process.
- Recommended solder for assembly: Sn-3.0Ag-0.5Cu.

#### Flow Solder Condition:

Pre-Heating: Maximum 120°C within 90 sec.  
Soldering: Dip within 5 sec. at 255°C±5°C solder bath  
Relay must be cooled by air immediately after soldering

#### Solder by Soldering Iron:

Soldering Iron: 30-60W  
Temperature: Maximum 350-360°C  
Duration: Maximum 3 sec.

**We highly recommend that you confirm your actual solder conditions**

### 3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays, unless otherwise indicated.

### 4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

## Contact

### Japan

FCL COMPONENTS LIMITED  
Shinagawa Seaside Park Tower  
12-4, Higashi-shinagawa 4-chome,  
Tokyo 140 0002, Japan  
Tel: +81-3-3450-1682  
Email: fcl-contact@cs.fcl-components.com

### North and South America

FCL COMPONENTS AMERICA, INC.  
2055 Gateway Place Suite 480,  
San Jose, CA 95110 USA  
Tel: +1-408-745-4900  
Email: contact@fcl-components.us

### Europe

FCL COMPONENTS EUROPE B.V.  
Diamantlaan 25  
2132 WV Hoofddorp, Netherlands  
Tel: +31-23-556-0910  
Email: info@fcl-components.eu

### Asia Pacific

FCL COMPONENTS ASIA PTE LTD.  
51 Changi Business Park Central 2, #06-07  
The Signature Singapore 4860666  
Tel: +65-6375-8560  
Email: fcsl@fcl-components.com

### China

FCL COMPONENTS (SHANGHAI) CO.,LTD.  
Unit 1105, Central Park - Jing An,  
No.329 Heng Feng Road, Shanghai  
200070, China  
Tel: +86-21-3253 0998  
Email: fcsh@fcl-components.com

### Hong Kong

FCL COMPONENTS HONG KONG CO.,  
LIMITED  
Unit 2313, Seapower Tower, Concordia  
Plaza, No.1 Science Museum Road,  
TST, Kowloon, Hong Kong  
Tel: +852-2881-8495  
Email: fcsl@fcl-components.com

Web: [www.fcl-components.com/en/](http://www.fcl-components.com/en/)

© 2025 FCL Components Limited. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

FCL Components Products are intended for general use, including without limitation, in personal, household and office environments, in buildings and for ordinary use in the industry. FCL Components Products are not intended to be used in applications where extremely high safety is required ("High Safety Required Applications"), such as, but not limited to, applications in nuclear facilities, in aircraft automatic flight control, in air traffic control, in mass transit system control, in missile launch system, in weapon systems, in medical equipment for life support or any application involving a direct serious risk of physical injury or death.

Please do not use FCL Components Products without securing the sufficient safety and reliability required for the High Safety Required Applications.

In addition, FCL Components shall not be liable against the customer and/or any third party for any claims or damages arising in connection with the use of FCL Components Products in the High Safety Required Applications.

FCL Components warrants that its Products, if properly used and services, will conform to their specification and will be free from defects in material and workmanship for twelve months from delivery.

The implied warranties of merchantability and fitness for a particular purpose and all other warranties, representations and conditions, express or implied by statute, trade usage or otherwise, except as set forth in this warranty, are excluded and shall not apply to the Products delivered.

The contents, data and information in this datasheet are provided by FCL Components Limited as a service only to its user and only for general information purposes. The use of the contents, data and information provided in this datasheet is at the users' own risk.

FCL Components has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

FCL Components Limited and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Nor do FCL Components Limited and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. December 24, 2025.