

MALLORY Mallory Sonalet Products, Inc.
Sales Outline Drawing

Part #: **JTC120-RG-CSL**
 Revision **A**


Specifications:

Stack Number:	1	2		
LED Color:	RED	GREEN		
LED Operation:	Continuous	Continuous		
Connection Wires:	Red and Brown	Green and Brown		
LED Current Draw:	<210 mA	<190 mA		
Rated Voltage:		120 VAC		
Operating Voltage:		90-120 VAC		
Sound Level Category:	Loud	Loud	Loud	Loud
Mode of Operation:	Continuous	Medium Pulse (5PPS)	Double Pulse (0.5PPS)	Continuous for 5 sec then 0.1s beep until reset
Connection:	Black and Gray Wires	Black and Gray Wires; Orange wire connected to Green/Yellow wire	Black and Gray Wires; Purple wire connected to Green/Yellow wire	Black and Gray wires; Orange and Purple wires connected to Green/Yellow wire
Sound Current Draw:	40mA Max.	40mA Max.	40mA Max.	40mA Max.
Loudness @ 1m:		80-85 dB(A) Typ.		
Frequency:		2000 ± 500 Hz		
Total Max Current:		<440mA with all LED's and sound unit working		
Operating Temperature:		-25° ~ +60°C		
Lens Color:		Transparent - matching LED stack color		
Material:		Lexan CFR7431		
Mounting Method:		Stainless Steel Pole		
Weight Typical (g):		690		
NEMA 12:		Approved		
Options:		Please contact factory.		

Dimensions: Inches (mm)

cUL Recognized
 PATENT NUMBER(S) 10309594 D898600

ROHS Compliant

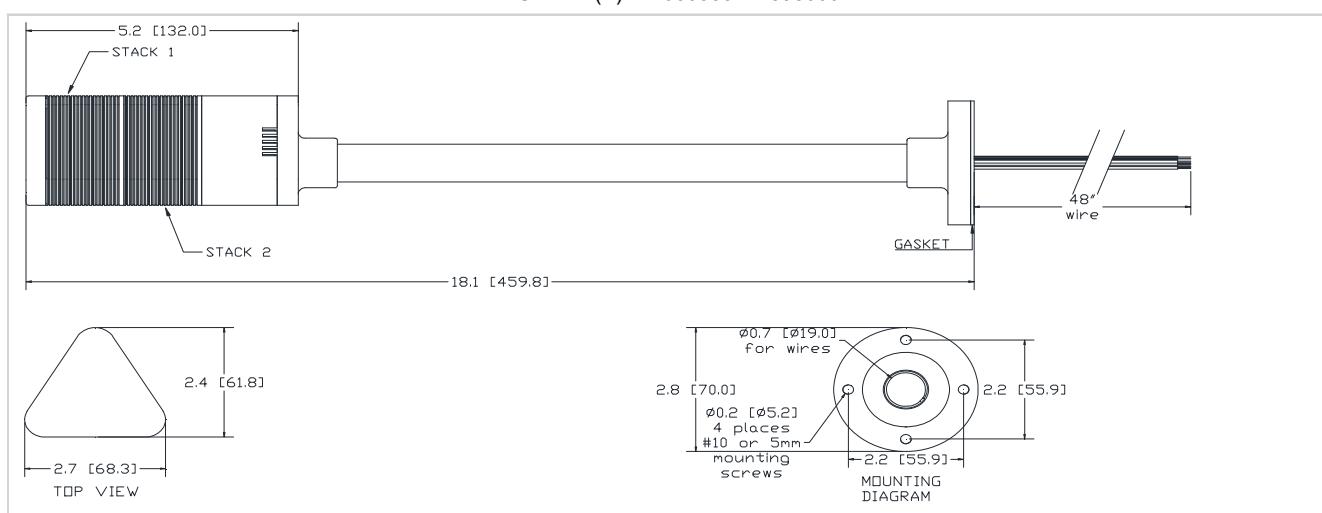

LED OPERATION: CONNECT STACK COLOR WIRE TO POWER AND BROWN WIRE TO POWER.

SOUND OPERATION: CONNECT GRAY AND BLACK WIRES TO POWER FOR CONTINUOUS SOUND.

FOR MEDIUM PULSE, CONNECT GRAY & BLACK TO POWER AND ORANGE WIRE TO GREEN/YELLOW WIRE.
 FOR DOUBLE PULSE, CONNECT GRAY & BLACK TO POWER AND PURPLE WIRE TO GREEN/YELLOW WIRE.
 FOR CONT/BEEP, CONNECT GRAY & BLACK TO POWER AND ORANGE & PURPLE TO GREEN/YELLOW WIRE.