


100-125V 12A Single-Phase Hot-Swap PDU with Manual Bypass - 6 NEMA 5-15R Outlets, 2 5-15P Inputs, 1U Rack/Wall

MODEL NUMBER: PDUB151U

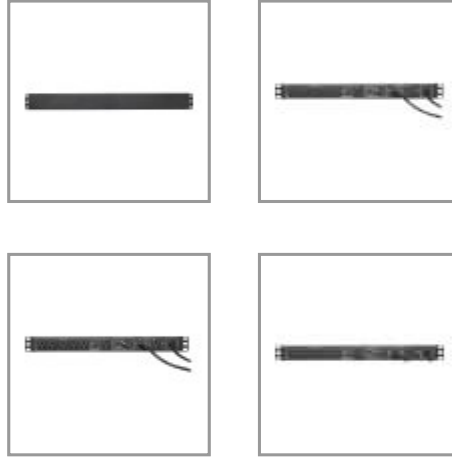

Bypass PDU maintains continuous power to connected equipment during scheduled UPS maintenance or replacement.

Features

Bypass PDU Recommended for Maintaining Continuous Power During UPS Maintenance

Keeping mission-critical data center equipment operating at its optimal level often means scheduled maintenance. But what if you are unable to afford the costly downtime involved in powering down for regular upkeep? This 100-125V 12A single-phase hot-swap rack PDU (rPDU) works in conjunction with your UPS system to keep everything running 24/7/365. It allows you to manually transfer connected equipment to utility power via the PDU's bypass switch, permitting maintenance or equipment replacement with no interruption of performance.

Features Dual Inputs and a Manual Transfer Switch for Uninterrupted Operation

The PDUB151U includes separate UPS and utility input cables with NEMA 5-15P plugs. The manual transfer switch allows PDU output power to flow from either input. Flip the switch to Bypass to replace the UPS and flip back to Normal once the maintenance or UPS replacement is complete. Equipment connected to the six NEMA 5-15R outlets will continue to operate without interruption.

Optional ECO Switching Feature Enables Cost-Cutting Power Savings

By enabling the ECO power saving feature, you can power off a single bank of five controlled 5-15R outlets all at once when the device connected to the master 5-15R outlet is powered off or goes into a low-power consumption mode.

Mounts into 1U of Rack Space or Wall

Use the included mounting hardware to install the PDUB151U's all-metal housing into 1U of space in an EIA-standard 19-inch rack. You may also use the mounting brackets to secure the PDU to a wall.

Specifications

Highlights

- Ideal for supporting critical IT equipment that require 24/7/365 uptime
- Transfers connected components to utility power with no downtime during UPS maintenance
- Dual UPS and utility input cables with NEMA 5-15P plugs deliver AC power
- ECO mode saves power by shutting down controlled outlet bank in certain conditions
- Mounts into 1U of rack space or onto wall using included mounting hardware

Applications

- Set the bypass switch to UPS during normal operation, so connected equipment can receive fulltime conditioned power
- Set the bypass switch to Utility to bypass the UPS and provide connected equipment with unfiltered power during UPS maintenance or replacement
- Enable ECO Switching to save power by shutting down one load bank when the device connected to the master outlet is powered off or in low-consumption mode

Package Includes

- PDUB151U 100-125V 15A Single-Phase Hot-Swap PDU
- Mounting hardware
- Owner's manual

OVERVIEW

UPC Code

037332253071



Powering Business Worldwide

TRIPP LITE
SERIES

PDU Type	Hot-Swap
INPUT	
Input Phase	Single-Phase
PDU Input Voltage	100; 120; 125
Recommended Electrical Service	Works with most 100-125V UPS systems up to 1500VA
Maximum Input Amps	12
Maximum Input Amps Details	Agency de-rated to 12A continuous
Input Connection Type	(2) NEMA 5-15P
PDU Plug Type	(2) NEMA 5-15P
Input Cord Details	Utility input cable (10 ft / 3m) / UPS input cable (4 ft / 1.2m)
Input Cord Length (ft.)	10
Input Cord Length (m)	3.05
OUTPUT	
Output Capacity Details	1.52kW (125V), 1.44kW (120V), 1.2kW (100V) / 15A total capacity (Agency de-rated to 12A); 12A max per 5-15R outlet
Frequency Compatibility	50 / 60 Hz
Output Receptacle Details	Set of 6 output receptacles are arranged in two groups to support the optional ECO Power-Saving feature; One MASTER-outlet provides optional current-sense capability that when enabled, automatically powers off the bank of 5 CONTROLLABLE GROUP-outlets when the device connected to the MASTER-outlet is powered off or enters a low power sleep mode consuming 20W or less (±5W)
Output Receptacles	(6) 5-15R
Output Nominal Voltage	100-125V
USER INTERFACE, ALERTS & CONTROLS	
Switches	2 position Manual Transfer switch offers Break-Before-Make transfer between UPS and Utility operating modes with less than 8 milliseconds (typical) transfer time; Additional switch offers ENABLE/DISABLE control of the ECO Power-Saving feature
LED Indicators	Front panel LEDs report UTILITY Input Power ON (green), BYPASS-MODE Switch Setting (yellow), MASTER Outlet Power ON (green), CONTROLLABLE GROUP Outlets Power ON (green)
SURGE / NOISE SUPPRESSION	
Automatic Shut-Off	No
PHYSICAL	
Material of Construction	Metal
Rack Height	1U
Form Factors Supported	Includes installation accessories for wall mount and 1U horizontal rackmount installation in 2 or 4 post equipment racks
PDU Form Factor	Horizontal (1U)
Shipping Dimensions (hwd / in.)	5.20 x 8.00 x 21.30



Powering Business Worldwide

TRIPP LITE
SERIES

Shipping Weight (kg)	3.08
Unit Dimensions (hwd / in.)	1.730 x 17.240 x 3.940
Unit Dimensions (hwd / cm)	4.39 x 43.79 x 10.01
Unit Weight (lbs.)	5.2
Unit Weight (kg)	2.36
ENVIRONMENTAL	
Operating Temperature Range	32° to 104°F (0° to 40°C)
Storage Temperature Range	-22° to 122°F (-30° to 50°C)
Relative Humidity	5% to 95% non-condensing
Operating Elevation	0-10000 ft. (0-3000 m)
FEATURES & SPECIFICATIONS	
High Availability PDU Features	Manual Hot-Swap Bypass
STANDARDS & COMPLIANCE	
Product Certifications	CAN/CSA-C22.2 No. 62368-1 (Canada); NOM (Mexico); UL 62368-1
Product Compliance	RoHS
WARRANTY & SUPPORT	
Product Warranty Period (Worldwide)	2-year limited warranty

1000 Eaton Boulevard
Cleveland, OH 44122
United States
<https://tripplite.eaton.com>

© 2025 Eaton. All Rights Reserved.
Eaton is a registered trademark. All other trademarks
are the property of their respective owners.