

Helping Customers Innovate, Improve & Grow



**OX-204**

The OX-204 is an Ultra Low Phase Noise Ovenized Crystal Oscillator with a noise floor as low as -175 dBc/Hz. Designed for applications that demand extremely low noise sources, including the reference oscillator for a phase-locked loop in the microwave spectrum. Custom frequencies available upon request.

### Features

- -140 dBc/Hz at 10 Hz offset
- -175 dBc/Hz at 10 kHz offset
- 10 MHz standard, other frequencies available

### Applications

- Military Radar
- Instrumentation and Test Equipment
- Synthesizers
- Military Communication Equipment
- DRO reference
- Satellite Communications

### Performance Specifications

#### Phase Noise Ordering Codes at 10 MHz


Frequency Offset (Hz)	A	B	C (12V only)	D (12V only)	E (5V only)	Unit	Condition
1	-95	-100	-105	-110	-105	dBc/Hz	Maximum values All EFC settings
10	-125	-130	-135	-140	-135		
100	-150	-155	-157	-157	-157		
1000	-160	-165	-167	-165	-167		
10,000	-170	-170	-175	-170	-172		
100,000	-170	-170	-175	-170	-173		

#### Frequency Stabilities at 10 MHz


Parameter	Min	Typical	Max	Unit	Condition
vs. operating temperature range	-10		+10	ppb	-20 to +70°C (referenced to +25°C)
	-20		+20	ppb	-40 to +85°C (referenced to +25°C)
vs. Initial Tolerance	-100		+100	ppb	at time of shipment and 5V efc
Allan Deviation			5	E-12	0.1 to 1 second tau
vs. supply voltage change	-2		+2	ppb	±5% change
vs. load change	-2		+2	ppb	5% change in load
vs. aging / 1 day	-0.5		+0.5	ppb	after 7 days of operation
vs. aging / 1 <sup>st</sup> year	-100		+100	ppb	after 7 days of operation
vs. aging / year	-30		+30	ppb	after first year of operation
Warm up time			5	minutes	to ±10 ppb of 2-hour frequency @+25°C

## Product Performance Data


### Phase Noise

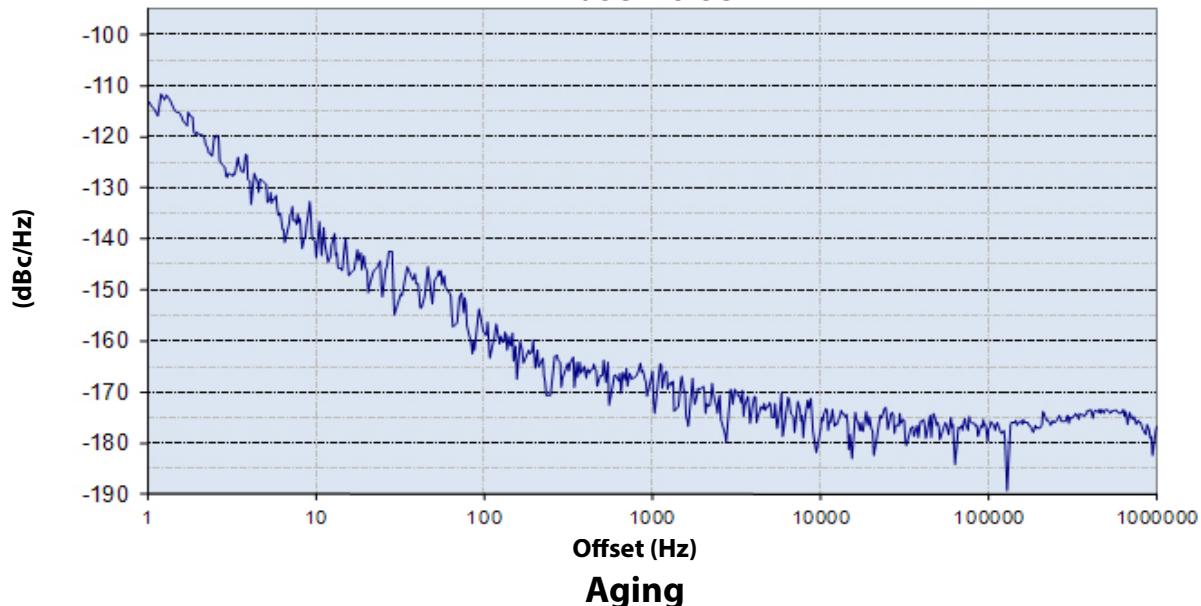

### Aging

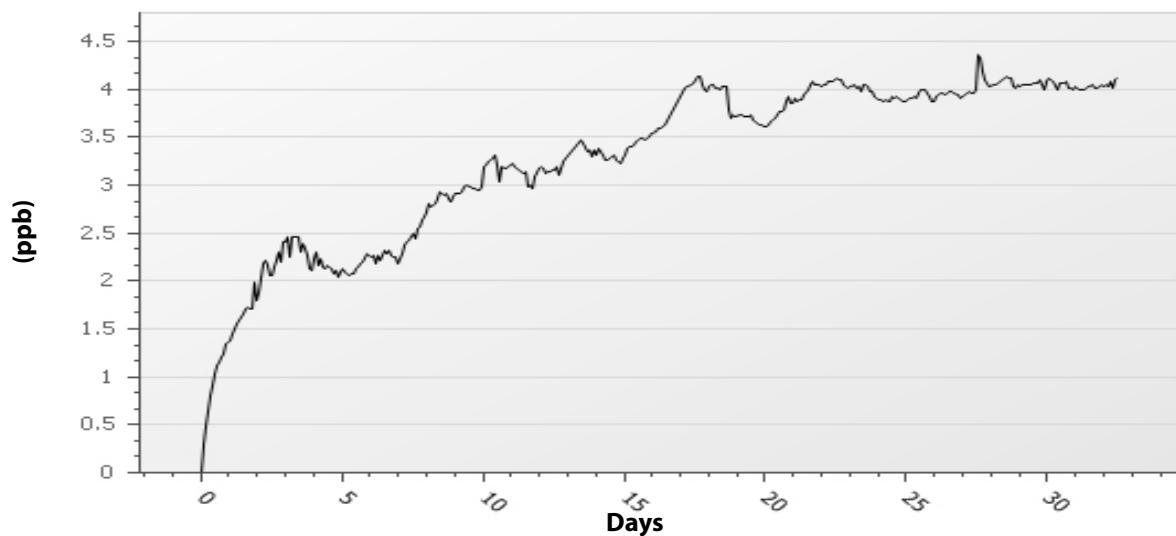

### Frequency vs. Temperature

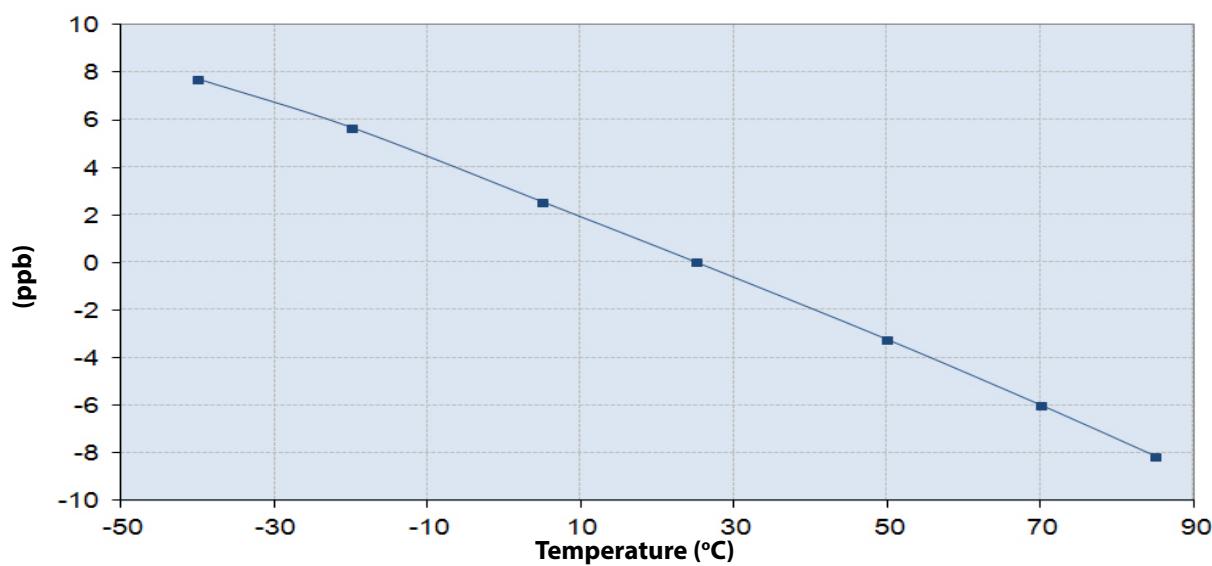


## Performance Specifications


Supply Voltage (Vs)					
Parameter	Min	Typical	Max	Unit	Condition
Supply Voltage	11.4	12.0	12.6	VDC	
	4.75	5	5.25	VDC	
Power Consumption			4.0 1.8	Watts Watts	during warm-up steady state @ +25°C
Reference Voltage		10		VDC	12 V version
		4.35		VDC	5 V version
RF Output					
Signal	Sinewave				
Load		50		Ohms	
Output Power	+7.0		+13.0	dBm	50 Ohm load @ Vs=12V
	+4.0		+7.0	dBm	50 Ohm load @ Vs=5V
Harmonics			-30	dBc	50 Ohm load
Spurious			-80	dBc	50 Ohm load
Frequency Tuning (EFC)					
Tuning Range	±400		±800	ppb	enough for aging over 15 year lifetime
Linearity			15	%	
Tuning Slope	Positive				
Control Voltage Range	0		10	VDC	Vs=12V
	0		4.35		Vs=5V
Input Impedance		100		kOhm	
Modulation Bandwidth	150			Hz	
Additional Parameters					
g-sensitivity			1.5	ppb/g	
Weight			20	grams	
Absolute Maximum Ratings					
Parameter	Min	Typical	Max	Unit	Condition
Supply Voltage (Vs)			15 7	V	12V version 5V version
Output Load			25	Ohms	
Operable Temperature Range	-55		+95	°C	Device will not sustain damage when operated at temperatures between the operating range and the operable range, but will not be specification compliant
Environmental and Product Classification					
Shock (Endurance)	MIL-STD-202, Method 213, Condition J, 30g 11 ms				
Sine Vibration (Endurance)	MIL-STD-202, Method 201 and 204, Condition A, except 5g to 500 Hz, 1 sweep each axis				
Random Vibration (Endurance)	MIL-STD-202, Method 214, Condition I-D				
Humidity	MIL-STD-202, Method 103, Condition B, 100% rh				
Seal	MIL-STD-202, Method 112, Condition D				
Altitude	MIL-STD-202, Method 105, sea level to space				
Resistance to Soldering Heat	MIL-STD-202, Method 210, Condition A,B,C				
Terminal Strength	MIL-STD-202, Method 11, Condition C (5 bends at 45°, 2 lbs)				
Moisture Sensitive Level	1				
RoHS	6 (fully compliant) - no pure tin options available upon request, the device will be assigned a customer part number, not orderable through ordering codes				
Storage Temperature Range	-55		+125	°C	

# Outline Drawing


## Dimensions in mm

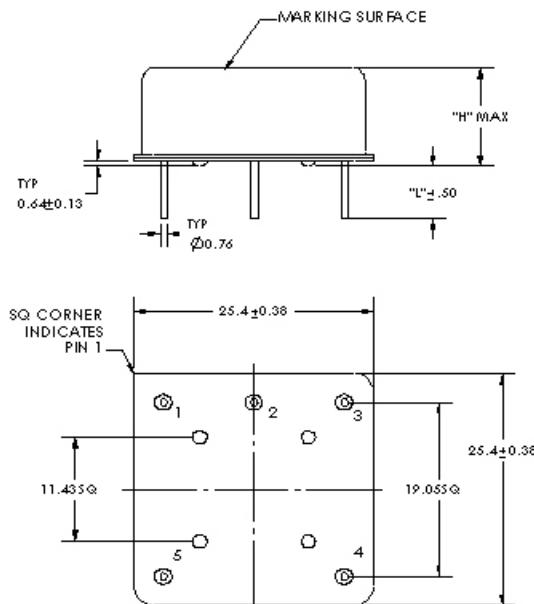

Code	Height "H"	Pin Length "L" Min
0	15.0	6.2
<b>Pin Connections</b>		
1	RF Output	
2	Ground (Case)	
3	Electronic Frequency Control Input (EFC)/ No Connect	
4	Reference Voltage	
5	Supply Voltage Input (VS)	

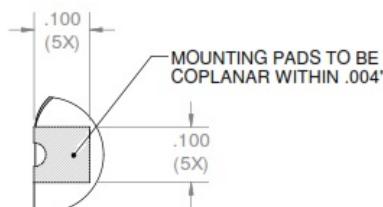

## Dimensions in inches

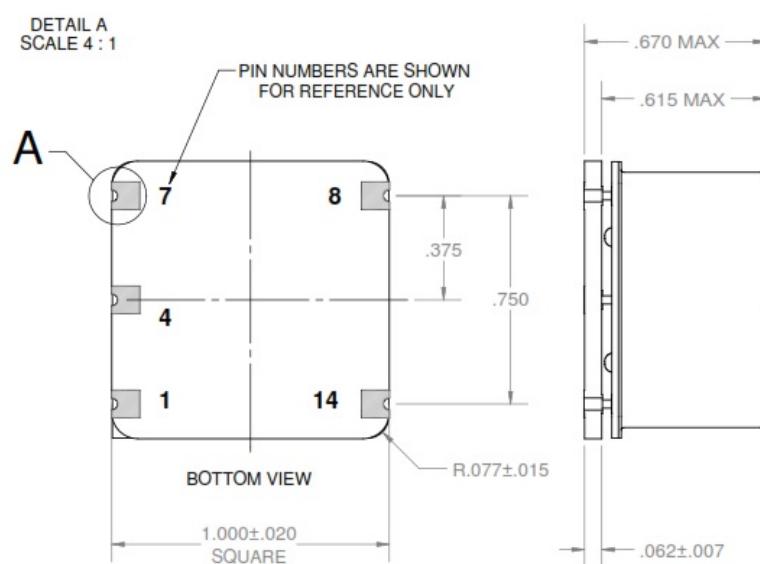

Code	Height "H"	Pin Length "L" Min
1	17.0 mm	na
<b>Pin Connections</b>		
1	RF Output	
4	Ground (Case)	
7	Electronic Frequency Control Input (EFC) No Connect for Fixed frequency Oscillators	
8	Reference Voltage	
14	Supply Voltage Input (VS)	

## Ordering Information

OX - 204 0 - B E E - 208 0 - 10M0000000

Product Family

OX: OCXO

Package

25x25mm

Height

0: 15.00 mm tht  
1: 17.00 mm smd

Supply Voltage

B: +12V  
D: +5V

RF Output Code

E: Sinewave

Frequency

Phase Noise and Frequency Control

- 0: No Tuning, phase noise code A
- 1: No Tuning, phase noise code B
- 2: No Tuning, phase noise code C
- 3: Frequency Tuning, phase noise code A
- 4: Frequency Tuning, phase noise code B
- 5: Frequency Tuning, phase noise code C
- 6: No Tuning, phase noise code D
- 7: No Tuning, phase noise code E
- 8: Frequency Tuning, phase noise code E

Stability Code

- 108:  $\pm 10\text{ppb}$  (Temp Code J only)
- 208:  $\pm 20\text{ppb}$

Temperature Range

- E:  $-40^\circ\text{C}$  to  $+85^\circ\text{C}$
- J:  $-20^\circ\text{C}$  to  $+70^\circ\text{C}$

**Notes:**

1. Contact factory for improved stabilities or additional product options including no pure tin options.
2. Certain codes available for sampling and short lead time requests. Please review website for codes.
3. Unless otherwise stated, all values are valid after warm-up time and refer to typical conditions for supply voltage, frequency control voltage, load, and temperature ( $25^\circ\text{C}$ ).
4. Contact factory for other frequencies. Phase noise degrades for frequencies greater than 10 MHz.
5. Subject to technical modification.
6. Contact factory for availability.

## Contact Information

**USA:**

100 Watts Street  
Mt Holly Springs, PA 17065  
Tel: 1.717.486.3411  
Fax: 1.717.486.5920

**Europe:**

Landstrasse  
74924 Neckarbischofsheim  
Germany  
Tel: +49 (0) 7268.801.0  
Fax: +49 (0) 7268.801.281



Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATION OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING, BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

**Trademarks**

The Microchip and Vectron names and logos are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.