


DC BRUSHLESS AXIAL FAN

R80W12BGN9-57

The UltraFlo series is a fan lineup that achieves high airflow, low power consumption, and long lifespan, boasting the world's top share in the communication IT field. The highly reliable fan motor is widely used in various applications. In addition to its expertise in precision small motors, it combines wind tunnel design and circuit design with safety mechanisms, offering a wide range of sizes from 1U to 4U. The lineup also includes dual-reverse fans to meet the high static pressure area required to send air into high-density enclosures, providing an effective means to increase redundancy.



■ CHARACTERISTIC CURVES

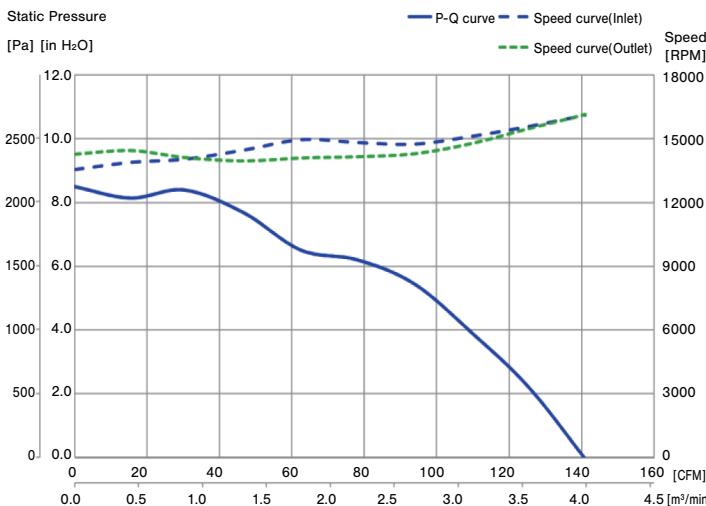

■ FEATURES

- 80 x 80 mm 12 VDC Brushless Fan
- High Airflow (137.5 CFM @ 3.89 m³ /min)
- Low Current Consumption 7.40 A (Nominal) 8.14 A (Max.)
- Long Lifespan 70,000 hours @ 40°C & 65 % R.H. (L10 Expectancy)
- Ball Bearings
- Counter Rotor Fan
- PWM Speed Control With Tach Output

1. MECHANICAL SPECIFICATIONS


1-1	External dimensions	Refer to outline dimensions
1-2	Housing material	PBT (UL94 V-0)
	Impeller material	PPS (UL94 V-0)
1-3	Bearing	Ball bearings
1-4	Mass	About 395 g
1-5	Life expectancy L10	70,000 hours 1) At 40°C (65 % R.H.), continuous operation at rated voltage. 2) Life is defined when the motor speed decreases more than 30% against its initial speed.

R80W12BGN9-57

DC BRUSHLESS AXIAL FAN

2. ELECTRICAL SPECIFICATIONS

No	Item Part number	R80W12BGN9-57	Remarks
2-1	Rated voltage	12 VDC	
2-2	Operating range	10.8~13.2 V	(Note 5)
2-3	Current consumption	Max.8.14 A 7.40 A (Nominal)	In free air at rated voltage (Note 4) (Note 6)
2-4	Power consumption	Max.97.7 W 88.8 W (Nominal)	In free air at rated voltage
2-5	Rated speed	Min.14400 min ⁻¹ 16000 min ⁻¹ (Nominal) Max. 17600 min ⁻¹	In free air at rated voltage Inlet&outlet side (Note 4)
2-6	Maximum air flow	Min.3.33 m ³ /min (117.6 CFM) 3.89 m ³ /min (137.5 CFM)	At rated voltage At zero static pressure (Note 4)
2-7	Maximum static pressure	Min.1358 Pa (5.45 inch-H ₂ O) 1766 Pa (7.09 inch-H ₂ O)	At rated voltage At zero air flow (Note 4)
2-8	Acoustic noise	Max. 86.5 dB (A) 82.0 dB (A) (Nominal)	In free air at rated voltage (A scale, slow) (Note 4)
2-9	Operating temperature	-10°C~70°C (Nominal)	
2-10	Storage temperature	-40°C~75°C (Nominal)	Standards for Items 2-3~2-8 should be met when measured after having sat for 24 hours at room temperature for fans subjected to specified temperature range for 100 hours.
2-11	Direction of rotation	Inlet : CW Outlet : CCW From exhaust side	
2-12	Direction of air flow	Label side discharge	
2-13	Insulation resistance	Min.10 MΩ	At 500 VDC between frame and lead wires
2-14	Dielectric strength	Must withstand 500 VAC 1min	Max. 1mA between frame and lead wires (Usually inspect at 600 VAC, 1 sec, 1 mA)
2-15	Protection	Current limit protection	(Note 2)
		Reverse polarity protection	(Note 3)
		Hot swap	
2-16	Peak current <Tentatively>	Max. 14.00 A Ref Avg 9.72 A Ref The value are for reference purpose only.	In max static pressure At rated voltage

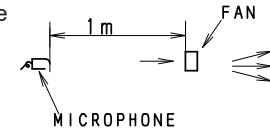

- Note 1: The above standard should be the specified value at operating temperature (-10~70°C) and humidity (5~90%) unless otherwise notice.
- Note 2: In the case that power is turned on during fan rotor is locked, the fan shall attempt to restart at a typical repetition rate (Temperature rise will be prevented). The fan will automatically restart when the locked rotor condition is released.
- Note 3: Power supply voltage must not be applied between signal output line and any other line directly. Reverse polarity protection is effective to just switch the positive and negative power line.
- Note 4: Control signal (Blue and green lead wires) should be applied 2.6 to 6.0 V, or should be open.
- Note 5: 10.8~13.2 V operating voltage range is for continuous DC voltage. Power supply voltage ripple 5% maximum.
- Note 6: The max value of current consumption does not represent the peak value.


R80W12BGN9-57

DC BRUSHLESS AXIAL FAN

3. PROVISION OF REVOLUTION SIGNAL

3-1 OUTPUT OF REVOLUTION SIGNAL


- Output type: open collector type
- Electrical specification

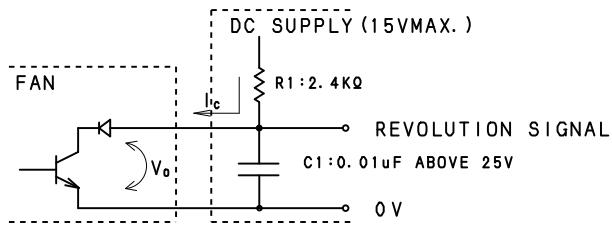

Remark: As for measuring V_{OL} , it is necessary to put a low pass filter which is constructed of $R1$ and $C1$. The time constant of $R1 \times C1$ is to be more than 24μs such as $R1=2.4\text{ k}\Omega$ $C1=0.01\text{ }\mu\text{F}$.

- Absolute maximum specification
 - Collector current $I_c=10\text{ mA Max.}$
 - Release Voltage $V_{OH}=15\text{ V Max.}$
- Electrical characteristics
 - Saturation Voltage $V_{OL}=0.8\text{ V Max.}$
 - At $I_c=5\text{ mA}$

- Output waveform
 - (At revolution)

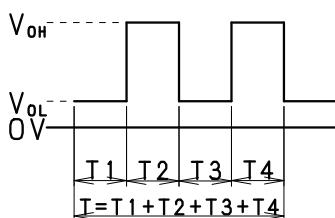

Remark: At locked position, output becomes V_{OH} OR V_{OL} .
 $T=T_1+T_2+T_3+T_4=60/N$ (Sec)

N : Fan Speed (min^{-1})

DUTY = $T_1 / (T_1+T_2) = 50 \pm 10\%$

3-2 ⚠ CAUTION

Please be careful that revolution signal lead wire (Yellow & white wire) shall not have any voltage directly applied. (It should damage inner circuit.)

4. PWM CONTROL

Items			Remarks
Electrical specification	Signal voltage	High	$> 2.6\text{ V}$: Full speed
		Low	$< 0.8\text{ V}$: Low speed
	Frequency range	Open	Full speed
		Max.	30 kHz
	Nominal	25 kHz	TTL/CMOS level. Refer to Fig.4 and Fig.5.
		Min.	20 kHz

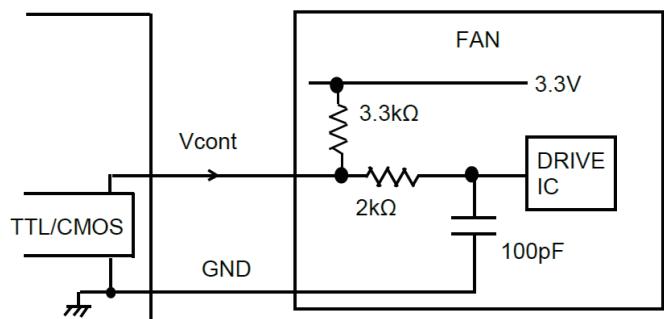


Fig.4

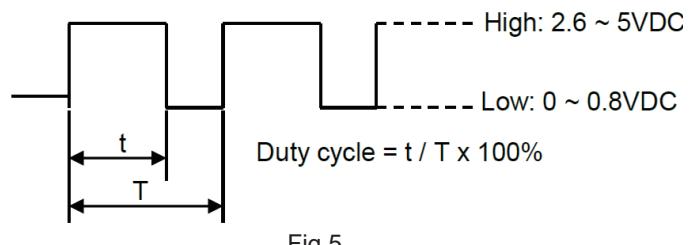


Fig.5

The frequency for control signal of the fan shall be able to accept at 20 kHz-30 kHz.

PWM signal with 3.3 VDC TTL/CMOS level. The preferred operating point for the fan is 25 kHz, and duty cycle from 0% to 100%.

If the PWM control wire connect to ground, the rotor will spin at minimum speed.


If the PWM control wire open, the rotor will spin at maximum speed.

R80W12BGN9-57


DC BRUSHLESS AXIAL FAN



● SPEED VS PWM CONTROL SIGNAL, AT RATED VOLTAGE

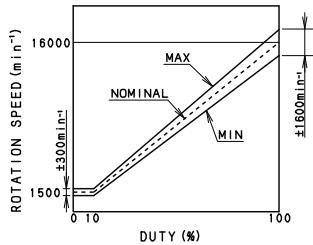

Detail of PWM curve(Inlet side)

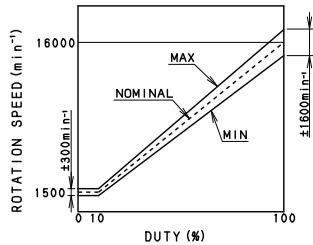

Detail of PWM curve(Outlet side)

Duty (%)	Speed (min⁻¹)	
	Inlet side	Outlet side
0	1500±500	1500±500
10	1500±500	1500±500
50	7940±794	7940±794
100	16000±1600	16000±1600

Note: The standards should be the specified value at normal temperature (21~25°C) and normal humidity (60~65%), and free air unless otherwise notice.

5. SPECIAL TEST

5-1 VIBRATION TEST

Standards for items 2-3~2-8 and 6-2 should be met after 30 minutes 0.2 mm amplitude, 55 Hz vibration in each direction: up-down, right-left, forward-back, in non-operating condition.

5-2 SHOCK TEST


Standards for items 2-3~2-8 and 6-2 should be met if the fans fall naturally from a height of 30 cm in the packing box for each direction.

*Dimensions of Packing Box (W x D x H) :

360 x 540 x 220 (mm)

6. OTHERS

6-1 CONNECTION

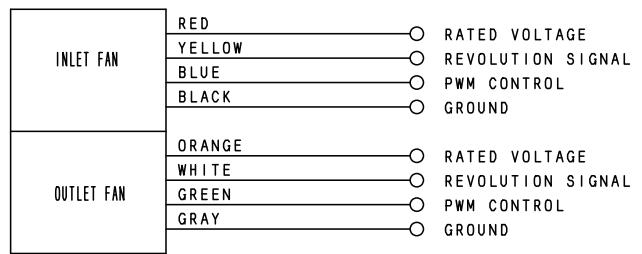

6-2 LOCKED ROTOR

No damage shall be found for continuous 1 hour at locked rotor.

6-3 ⚠ CAUTIONS IN INSTALLATION OF FAN MOTORS

Please consider system layout not to place any obstacles within 3mm from the fan housing edge of inlet side (Impeller side).

In case of screwing the fan housing, flatness of installation surface should be max. 0.1, otherwise the housing may transform and interfere with the impeller.

The fan should not get any impact or vibration during rotation. When vibration or impact is applied to the fan during rotation, the fan may break by interfering with obstacle in the system.

Please fix the fan in the system so that it will not rattle. Vibration of the fan may cause contact between the fan and the system, which will generate noise.

Please do not place any obstacle near outlet and inlet side of the fan.

Placing obstacles near the fan may deteriorate air flow.

It may cause cooling performance reduction as well as fan motor life deterioration due to heavy load on the bearings.

For any usage that does not meet above conditions, please evaluate at user's side or consult with us.

R80W12BGN9-57

DC BRUSHLESS AXIAL FAN

6-4 ⚠ USAGE OF FAN MOTOR

Please do not put resistors or other electronic components on the extension of the fan motor lead wires for the purpose of fan motor speed reduction.

It may make the voltage to the fan fluctuate and become lower than lower limit of operating voltage range.

In this case, there may be such failures like no start or unstable rotation of fan motor.

6-5 ⚠ EARTH · ELECTROSTATIC PROTECTION

Electrification and leakage can cause motor circuit or semiconductor failure.

Proper grounding is required for soldering iron and conveyer belt during motor terminal or lead wire soldering to mechanism or set. (± 200 V or less)

7. SPECIAL ITEMS

7-1 WARRANTY

Our warranty is limited to the replacement of failed fan at free of charge, if and only if the failure is found within two years after it was shipped out from our production facility and if the cause of the failure is proven to be attributable to the supplier.

Our liability does not extend to the consequential damages caused by the failed fan.

7-2 NOTE

Please consider having an independent protection system in the customer's instruments in the event that the fan should stop operating.

7-3 POWER SOURCE

Brushless DC fans are designed to be used at DC power source with bypass capacitor. We would recommend you to use DC power source which is filtered ripple and noise.

- Fans are designed to perform as expected when stable voltage is supplied.
- Fluctuation of the voltage between Vcc(+) and GND while the fan is powered must be within the specified operating voltage range.
- Fluctuation cycle of the voltage between Vcc(+) and GND while the fan is powered must be longer than the fan's rotation cycle.
- GND of the fan must be kept below the voltage of its Vcc(+) when the voltage is switched ON/OFF or the fan is not running.
- Devices that use the fans are supposed to be designed so that the voltage applied on the revolution signal is not affected by power ON/OFF.

7-4 ENVIRONMENT-RELATED SUBSTANCES

Based on RoHS3, cadmium, lead, mercury and compound of these substances and hexavalent chromium compound, Polybromo bi-phenyl(PBB) and polybromo di-phenyl ether(PBDE) are not included in this product.


R80W12BGN9-57

DC BRUSHLESS AXIAL FAN



■ OUTLINE DIMENSIONS

(Unit:mm)

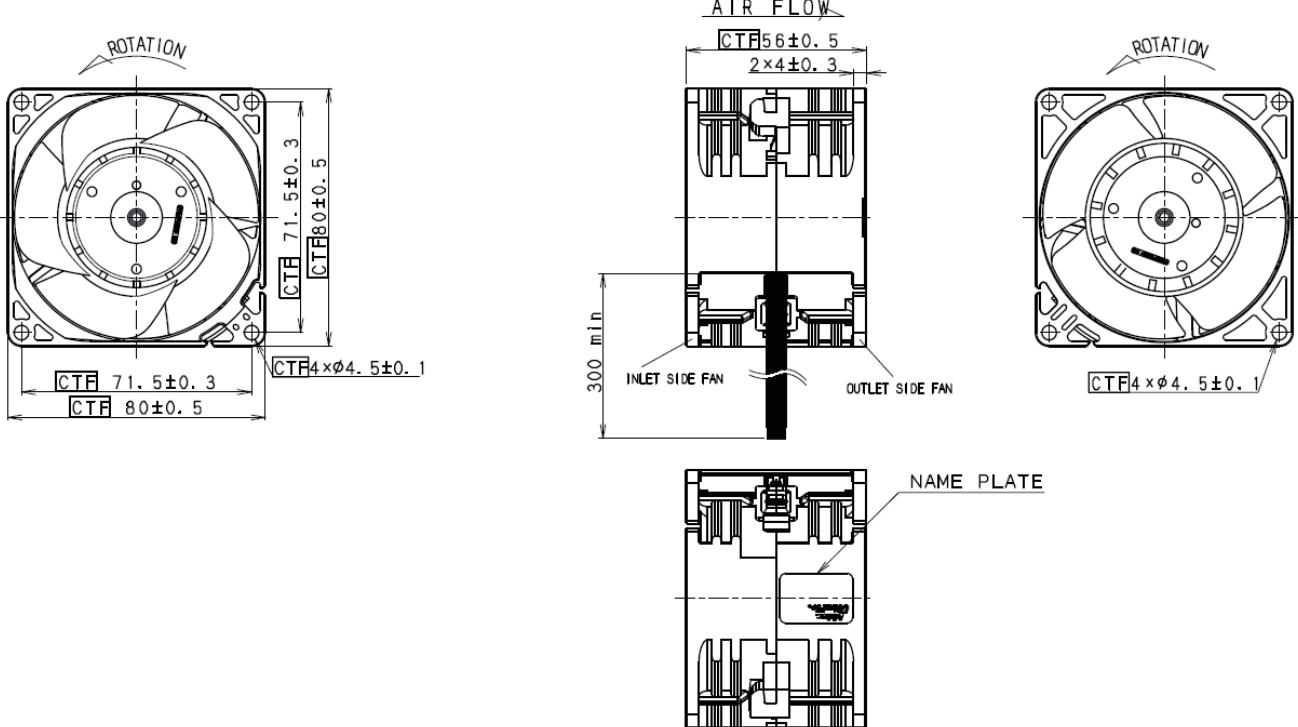

Color	Lead wire	UL No, AWG
Red	+12V (Inlet)	3265, 22
Orange	+12V (Outlet)	
Black	GND (Inlet)	
Gray	GND (Outlet)	
Blue	PWM (Inlet)	3265, 26
Green	PWM (Outlet)	
Yellow	SIG (Inlet)	
White	SIG (Outlet)	