

DIN Rail 5000hms 4-20mA to 0-10Vdc

Resistor for DIN Rail 5000hms 4-20mA to 0-10Vdc
(include 1 units):

PT 4 Feed-Through and Multi-Conductor Terminal Blocks
50% less insertion force

Resistor tolerance +/- 1%

Compact design and front connection facilitate
wiring in the smallest of spaces

Tool-free wiring of conductors with ferrules or solid
conductors

Stranded conductors with ferrules can be inserted
directly with PIT 2,5 (from 0.34 mm²) and PIT 4
(from 0.5 mm²)


Actuation lever opens the terminal point, so there is
no direct contact with live parts
Double bridge shaft enables individual potential
distribution and supply

Dimensions

Width	5.2 mm
Length	78 mm
Height NS 35/7,5	55 mm
Height NS 35/15 62.5 mm	62.5 mm

Symbology

	Indicates that the equipment is suitable for direct current only; to identify relevant terminals
	Indicates that the equipment is suitable for alternating current only; to identify relevant terminals
	To identify the control by which a pulse is started.
	To identify an earth (ground) terminal in cases where neither the symbol 5018 nor 5019 is explicitly required.
	To identify the switch by means of which the signal lamp(s) is (are) switched on or off.
	CE marking indicates that a product complies with applicable European Union regulations
	Indicates a potentially hazardous situation which, if not avoided, could result in death or serious injury
	To indicate hazards arising from dangerous voltages

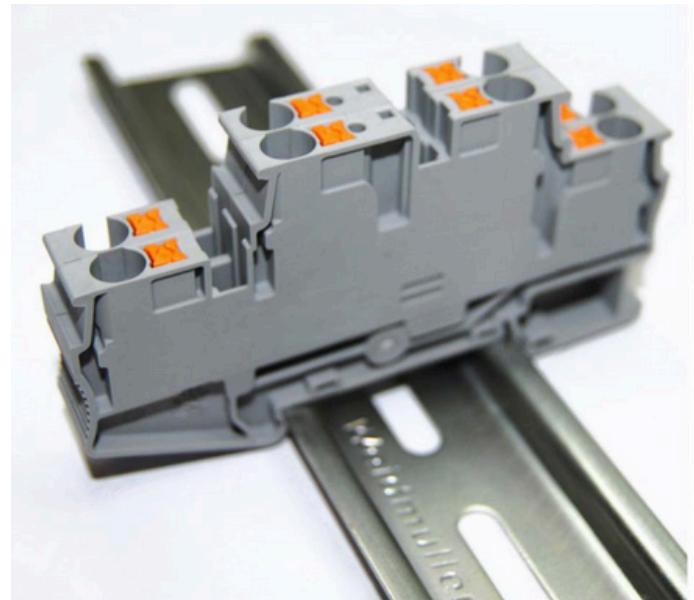

Technical Support

You can contact with us using the best channel for you:

 support@industrialshields.com

 www.industrialshields.com

 Visit our Blog, Forum or Ticketing system

 34 644 927 900

 Use our chat service

 Check the user guides

 Visit our Channel

