



FLEXIBLE

# Coaxial Cable

FL47-12KM+

Mini-Circuits

50Ω 12 inch DC to 40 GHz 2.92mm-Male

## THE BIG DEAL

- Wideband frequency coverage, DC to 40 GHz
- Low Loss, 2.7 dB typ. at 40 GHz
- Excellent Return Loss, 24 dB typ. at 40 GHz
- 5 mm static bend, 10 mm dynamic bend
- Insulated outer jacket standard
- Connector interface, meets IEEE STD 287-2007 standard
- Ideal for interconnect of assembled systems



Generic photo used for illustration purposes only

Model No.	FL47-12KM+
Case Style	UL3031-12
Connectors	2.92mm-Male

## APPLICATIONS

- Replacement for custom bent semi-rigid cables
- Communication receivers and transmitters
- Military and aerospace system
- Environmental and test chambers
- Test accessory

### +RoHS Compliant

The +Suffix identifies RoHS Compliance.  
See our website for methodologies and qualifications.

## PRODUCT OVERVIEW

The FL47 Series Flexible Coaxial Cables are ideal for interconnection of coaxial components or sub-systems. The construction includes a silver-plated copper-clad steel center conductor. The outer shield is copper braid, silver plated, which minimizes signal leakage and at the same time flexible for easy bend. Dielectric is low loss PTFE. Connectors have passivated stainless-steel coupling nut over a gold plated connector body with gold plated brass center conductor. The FL47 Series Flexible cables are available in variety of length to meet your requirements.

## KEY FEATURES

Feature	Advantages
Flexible RF Cables	The FL47 Series Flexible cables are ideal for use integrating coaxial components and subassemblies without the need for special cable-bending tools and alleviating the risk of damage during the bending process typical of semi-rigid coaxial cable assemblies.
Tight Bend Radius: 5mm static bend, 10mm dynamic	Capable of only 5mm static bend, 10mm dynamic bend radius, the FL47 Flexible series is able to make connections in tight spaces making these cables ideal for dense system integration
Excellent Return Loss: • 34 dB at 18 GHz	The FL47 Series Flexible Cables are ideally suited for interconnecting a wide variety of RF components while minimizing VSWR ripple contribution due to mating cables & connectors.
Good Power Handling Capability: • 61W at 0.5 GHz • 8W at 18 GHz	Mini-Circuits FL47 Cable series can support medium to high RF power levels enabling these cables to be used in the transmit path. NOTE: power rating is at sea-level altitudes

REV. B  
ECO-025808  
FL47-12KM+  
MCL NY  
250616

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

PAGE 1 OF 4



FLEXIBLE

# Coaxial Cable

**FL47-12KM+**

50Ω 12 inch DC to 40 GHz 2.92mm-Male

**ELECTRICAL SPECIFICATIONS AT +25°C**

Parameter	Frequency (GHz)	Min.	Typ.	Max.	Units
Frequency Range		DC	-	40	GHz
Length <sup>1</sup>			12		inches
Insertion Loss	DC - 18	-	1.17	2.33	dB
	18 - 40	-	2.28	3.54	
Return Loss	DC - 18	19.1	34.3	-	dB
	18 - 40	17.7	30.59	-	

1. Custom sizes available, consult factory.

**ABSOLUTE MAXIMUM RATINGS**

Parameter	Ratings
Operating Temperature	-55°C to +100°C
Storage Temperature	-55°C to +100°C
Power Handling at 25°C, Sea Level	61W at 0.5 GHz 16W at 6 GHz 8W at 18 GHz 6W at 26.5 GHz 2W at 40 GHz 1W at 50 GHz

Permanent damage may occur if any of these limits are exceeded.





FLEXIBLE

# Coaxial Cable

**FL47-12KM+**

Mini-Circuits

50Ω 12 inch DC to 40 GHz 2.92mm-Male

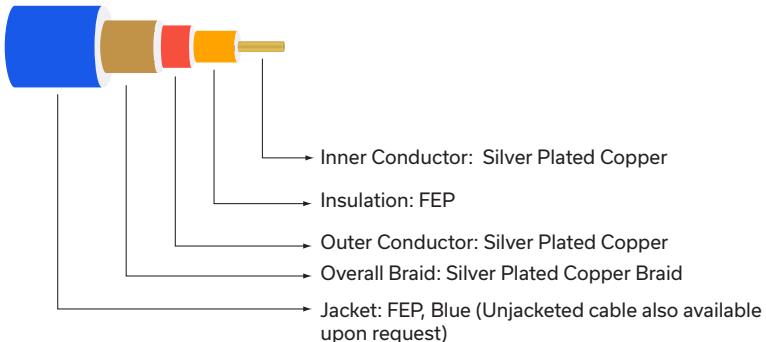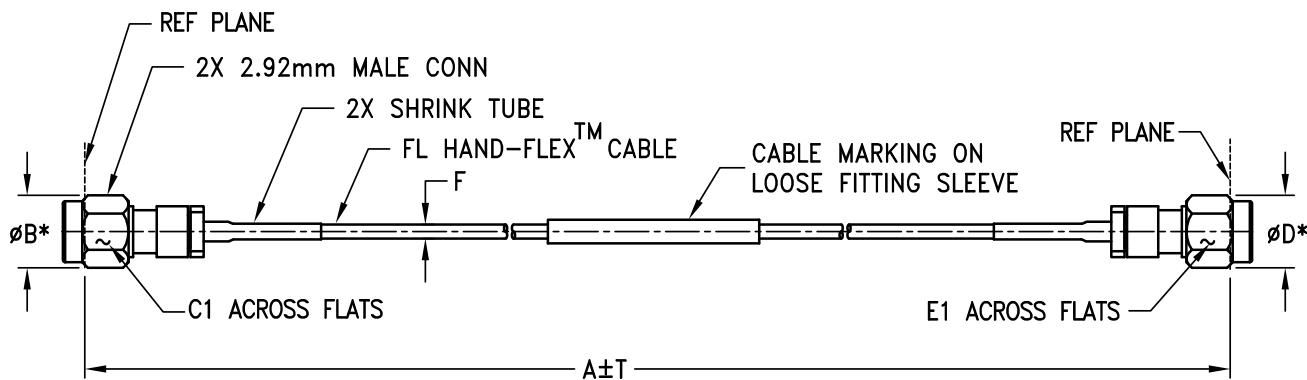**CABLE CONSTRUCTION****OUTLINE DRAWING****OUTLINE DIMENSIONS (Inch mm)**

<b>A</b>	<b>B</b>	<b>C1</b>	<b>D</b>	<b>E1</b>	<b>F</b>	<b>T</b>	<b>wt</b>
12.0 304.80	.36 9.14	.315 8.00	.36 9.14	.315 8.00	.055 1.40	.10 2.54	grams 10.38



FLEXIBLE

## Coaxial Cable



FL47-12KM+

Mini-Circuits

50Ω 12 inch DC to 40 GHz 2.92mm-Male

## TYPICAL PERFORMANCE DATA AND CHARTS

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)	
		Input 2.92mm-Male	Output 2.92mm-Male
100	0.06	37.84	37.63
3000	0.38	31.67	31.17
7000	0.57	38.29	39.42
10000	0.66	30.51	30.92
16000	0.83	39.24	34.02
19000	0.92	36.89	31.54
22000	1.00	33.29	31.10
25000	1.09	30.94	27.80
28000	1.18	24.98	24.25
31000	1.25	23.39	23.05
34000	1.31	25.38	25.32
37000	1.37	28.75	30.53
40000	1.45	21.32	21.69

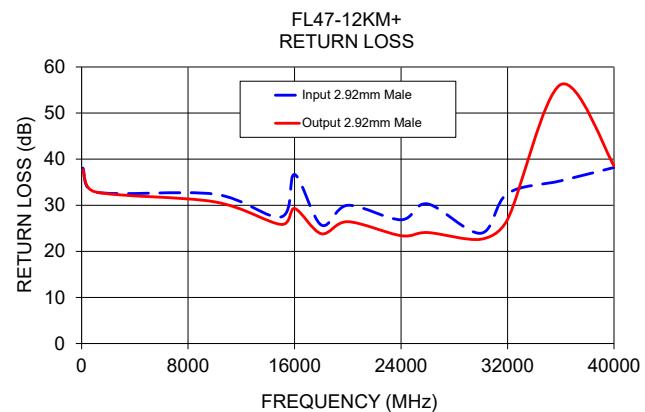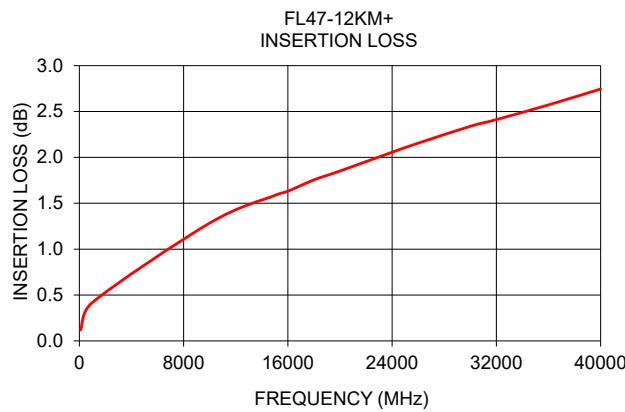

## NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)

Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

PAGE 4 OF 4