




FEATURES

- Excellent Power Handling, 8 W
- Small Size, 0.12x0.06"
- 7 Sections
- Temperature Stable
- Hermetically Sealed
- LTCC Construction
- Protected by U.S. Patent 6,943,646



Generic photo used for illustration purposes only

CASE STYLE: FV1206-4

+RoHS Compliant

The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

APPLICATIONS

- Harmonic Rejection
- VHF/UHF Transmitters/Receivers
- Lab Use

PRODUCT OVERVIEW

The LFCN-123+ Low Pass Filter gives microwave communication system designers the ability to reject unwanted harmonics using defined RF parameters. The multilayer construction gives high repeatability of performance. Small wrap-around terminations minimize variations in performance due to parasitics. Covering DC-12000 MHz, these units offer low insertion loss and good rejection.

KEY FEATURES

Feature	Advantages
Small Size (3.20x1.6 mm)	Allows for high layout density of circuit boards, while minimizing effects of parasitics.
Rejection Peaks at Harmonic Frequencies	Provides good rejection of signals at harmonic frequencies, for improved system performance.
Wrap-Around Termination	Provides excellent solderability and easy visual inspection capability.
LTCC Construction	Provides a rugged package that is well suited for tough environments including high humidity and high temperature extremes.



Mini-Circuits

CERAMIC

Low Pass Filter

LFCN-123+

50Ω

DC¹ to 12000 MHz

ELECTRICAL SPECIFICATIONS^{1,2} AT +25°C

Parameter		F#	Frequency (MHz)	Min.	Typ.	Max.	Units
Passband	Insertion Loss	DC-F1	DC-12000			2.5	dB
	Freq. Cut-Off	F2	13000		3.0		dB
	VSWR	DC-F1	DC-12000		1.6		:1
Stopband	Rejection Loss	F3	15000	20			dB
		F4-F5	15500-20000		40		
	VSWR	F3-F6	15500-20000		17		:1

1. In Application where DC voltage is present at either input or output ports, coupling capacitors are required.


2. Measured on Mini-Circuits Characterization Test Board TB-LFCN-123+.

ABSOLUTE MAXIMUM RATINGS


Parameter	Ratings
Operating Temperature	-55°C to +100°C
Storage Temperature	-55°C to +100°C
RF Power Input ³	8 W max. at +25°C

3. Passband rating, derate linearly to 3 W at +100°C ambient.
Permanent damage may occur if any of these limits are exceeded.

TYPICAL FREQUENCY RESPONSE

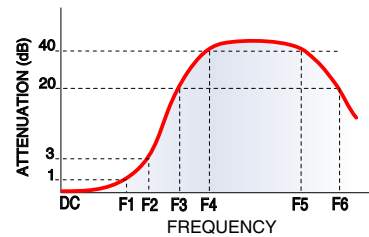

FUNCTIONAL SCHEMATIC

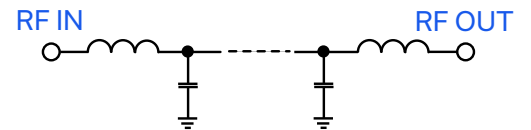




PIN CONNECTIONS

RF IN	1
RF OUT	3
GROUND	2,4

PRODUCT MARKING: AP

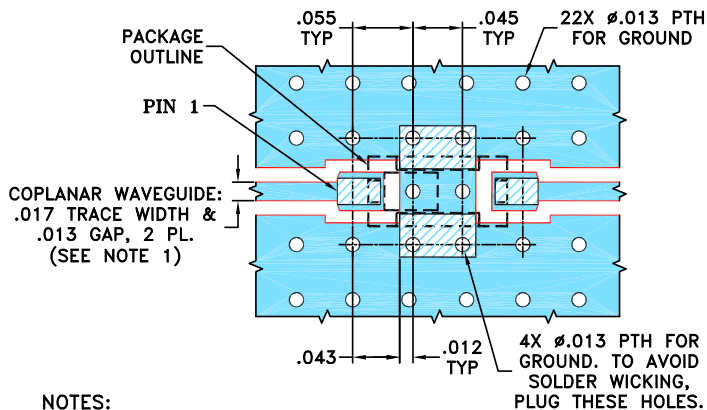
DEMO BOARD MCL P/N: TB-LFCN-123+
SUGGESTED PCB LAYOUT (PL-487)


NOTES:


- TRACE WIDTH AND GAP ARE SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .010" $\pm$.001". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

OUTLINE DRAWING

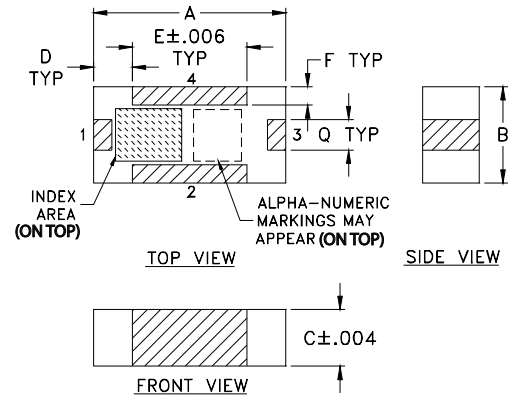

PCB Land Pattern

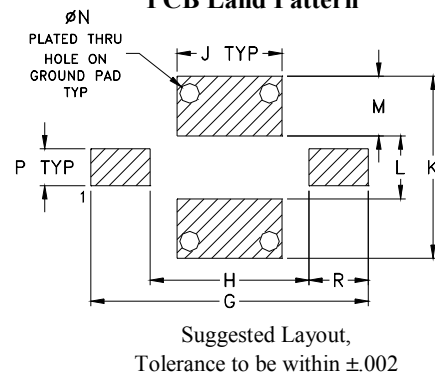

Suggested Layout,
Tolerance to be within $\pm .002$

OUTLINE DIMENSIONS (Inches mm)

A	B	C	D	E	F	G	H	J
.126	.063	.037	.026	.075	.012	.182	.104	.069
3.20	1.60	0.94	0.66	1.91	0.30	4.62	2.64	1.75
K	L	M	N	P	Q	R		wt
.119	.041	.039	.013	.024	.020	.039		grams
3.02	1.04	0.99	0.33	0.61	0.51	0.99		.020

TAPE & REEL INFORMATION: F75



Mini-Circuits

CERAMIC

Low Pass Filter



LFCN-123+

50Ω

DC¹ to 12000 MHz

TYPICAL PERFORMANCE DATA AT +25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
10	0.07	1.00
1280	0.31	1.44
1550	0.39	1.55
2080	0.51	1.70
3140	0.48	1.61
4200	0.26	1.05
5000	0.48	1.61
5330	0.62	1.76
6260	0.73	1.85
8450	0.77	1.92
10070	1.07	1.87
11020	0.78	1.29
12010	1.23	1.70
13220	3.56	2.12
15120	38.92	67.22
17710	43.82	57.85
20000	39.95	78.02

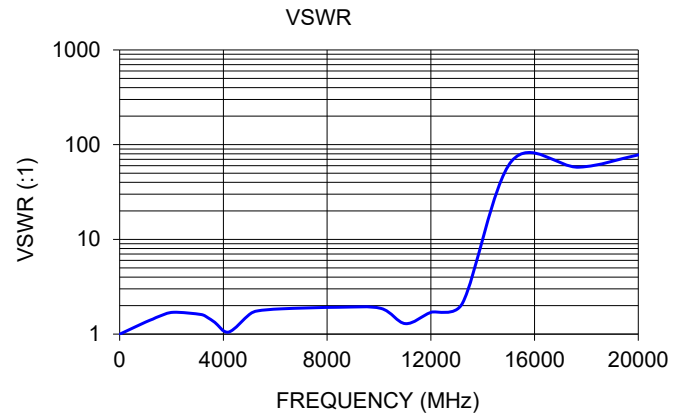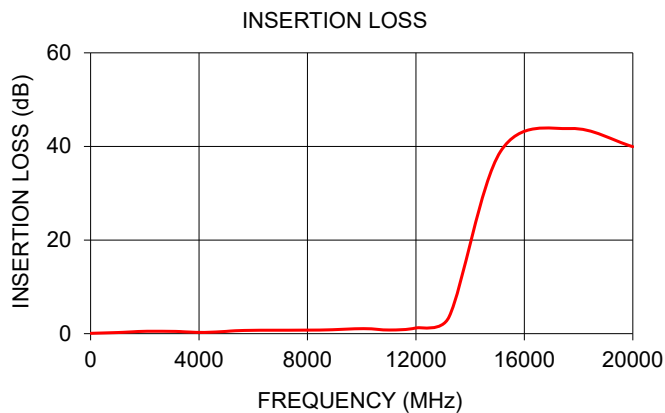

NOTES

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

