



Mini-Circuits®

CERAMIC

Low Pass Filter


50Ω

DC to 1525 MHz

LFCN-1525D+

FEATURES

- Excellent Power Handling, 10 W
- Small Size
- 7 Sections
- Temperature Stable
- LTCC Construction
- Protected by U.S Patent 6,943,646



Generic photo used for illustration purposes only

CASE STYLE: FV1206

APPLICATIONS

- Harmonic Rejection
- VHF/UHF Transmitters/Receivers
- Lab Use

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our website for RoHS Compliance methodologies and qualifications

ELECTRICAL SPECIFICATIONS^{1,2} AT +25°C

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Units
Passband	Insertion Loss	DC-F1	DC-1525		1.2	dB
	Freq. Cut-Off	F2	1750	3.0		dB
	VSWR	DC-F1	DC-1525	1.2		:1
Stopband	Rejection Loss	F3	2150	20		dB
		F4-F5	2450-6600		40	
		F6	6700		20	
		F3-F6	2150-6700		20	
	VSWR	F3-F6	2150-6700			:1

1. DC Resistance to ground is 100 Mohms min.

2. Measured on Mini-Circuits Characterization Test Board TB-LFCN-1525D+.


ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-55°C to +100°C
Storage Temperature	-55°C to +100°C
RF Power Input ³	10 W max. at +25°C
Max. DC Voltage at Pins 1 & 3	+25 VDC
DC Current Input to Output	0.5 A max. at +25°C


3. Derate linearly to 3.5 W at +100°C ambient.

Permanent damage may occur if any of these limits are exceeded.

TYPICAL FREQUENCY RESPONSE

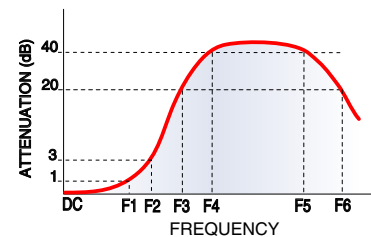

FUNCTIONAL SCHEMATIC

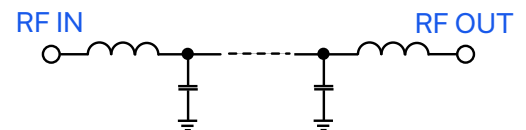

Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. G
ECO-011696
LFCN-1525D+
MCL NY
250625

PAGE 1 OF 3



Mini-Circuits

CERAMIC

Low Pass Filter

LFCN-1525D+


50Ω DC to 1525 MHz

PIN CONNECTIONS

RF IN	1
RF OUT	3
GROUND	2,4

PRODUCT MARKING: N/A


DEMO BOARD MCL P/N: TB-LFCN-1525D+
SUGGESTED PCB LAYOUT (PL-137)

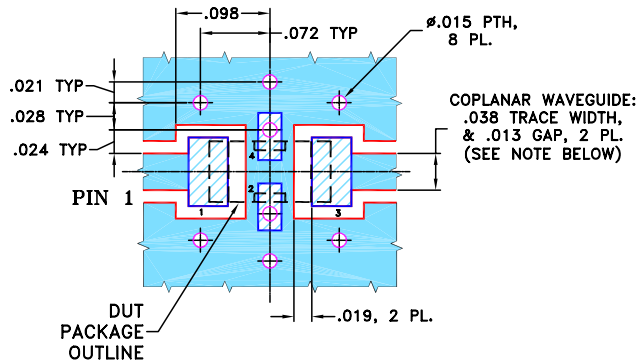


NOTES: 1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH THICKNESS .020" ± .0015".
COPPER: 1/2 OZ. EACH SIDE.
FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
-  DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 -  DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

OUTLINE DRAWING

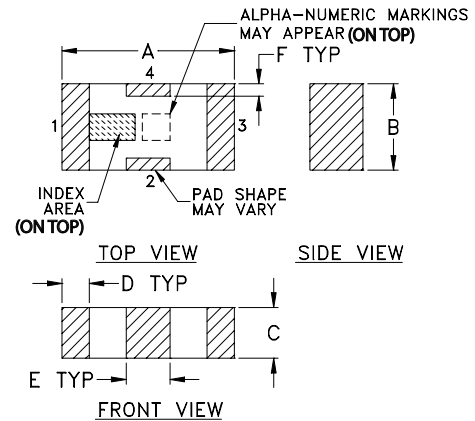

PCB Land Pattern

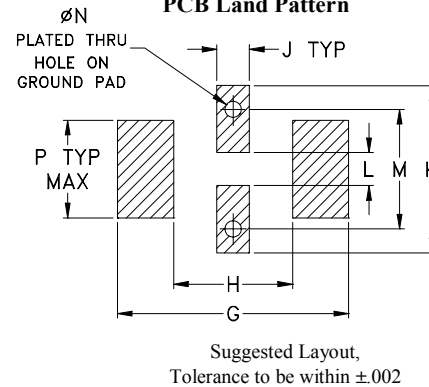

OUTLINE DIMENSIONS (Inches mm)

A	B	C	D	E	F	G	
.126	.063	.037	.020	.032	.009	.169	
3.20	1.60	0.94	0.51	0.81	0.23	4.29	
H	J	K	L	M	N	P	wt
.087	.024	.122	.024	.087	.012	.071	grams
2.21	0.61	3.10	0.61	2.21	0.30	1.80	.020

TAPE & REEL INFORMATION: F71



Mini-Circuits

CERAMIC

Low Pass Filter



LFCN-1525D+

50Ω

DC to 1525 MHz

TYPICAL PERFORMANCE DATA AT +25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
1	0.02	1.01
1000	0.41	1.15
1500	0.78	1.16
1600	0.99	1.22
1700	1.45	1.42
1750	1.92	1.64
1800	2.79	2.09
1850	4.37	2.93
1900	6.94	4.40
1950	10.49	6.49
2000	14.80	8.77
3000	36.58	22.29
5000	44.42	49.64
6000	47.89	45.72
7000	24.49	16.72

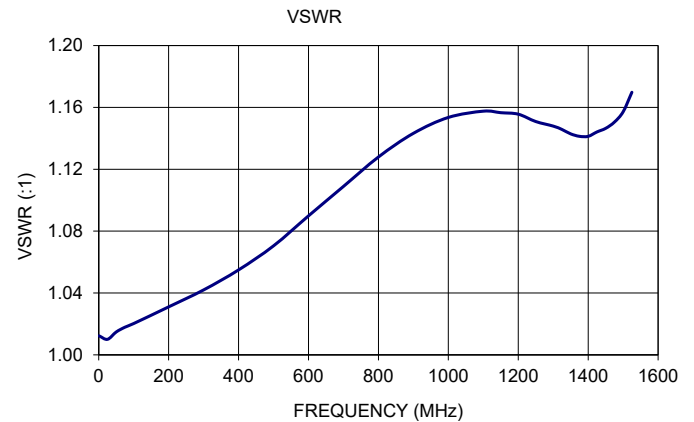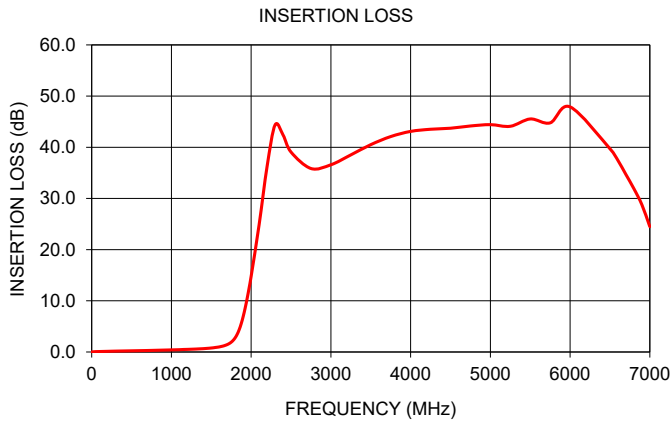

NOTES

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

