



Mini-Circuits®

CERAMIC

## Low Pass Filter


LFCN-722+

50Ω

DC<sup>1</sup> to 7200 MHz

## FEATURES

- Excellent power handling, 12 W
- Small size 1206 (3.2 x 1.6 mm)
- Temperature stable
- LTCC construction



Generic photo used for illustration purposes only

CASE STYLE: FV1206-4

## APPLICATIONS

- Harmonic rejection
- Transmitters/receivers
- Lab use

## +RoHS Compliant

The +Suffix identifies RoHS Compliance.  
See our website for methodologies and qualifications

ELECTRICAL SPECIFICATIONS<sup>1,2</sup> AT +25°C

| Parameter |                | F#    | Frequency (MHz) | Min. | Typ. | Max. | Units |
|-----------|----------------|-------|-----------------|------|------|------|-------|
| Passband  | Insertion Loss | DC-F1 | DC-7200         | —    | 1.9  | 3.2  | dB    |
|           | Freq. Cut-Off  | F2    | 7940            | —    | 3.0  | —    | dB    |
|           | VSWR           | DC-F1 | DC-7200         | —    | 2.0  | —    | :1    |
| Stopband  | Rejection Loss | F3    | 8980            | —    | 20   | —    | dB    |
|           |                | F4-F5 | 9270-10060      | 25   | 35   | —    |       |
|           |                | F6    | 15000           | —    | 30   | —    |       |

1. In Application where DC voltage is present at either input or output ports, coupling capacitors are required.


2. Measured on Mini-Circuits Characterization Test Board TB-LFCN-722+.

## ABSOLUTE MAXIMUM RATINGS


| Parameter                   | Ratings            |
|-----------------------------|--------------------|
| Operating Temperature       | -55°C to +100°C    |
| Storage Temperature         | -55°C to +100°C    |
| RF Power Input <sup>3</sup> | 12 W max. at +25°C |

3. Passband rating, derate linearly to 6 W at +100°C ambient.  
Permanent damage may occur if any of these limits are exceeded.

## TYPICAL FREQUENCY RESPONSE

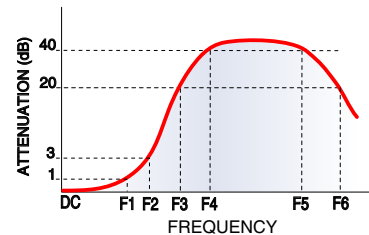

## FUNCTIONAL SCHEMATIC

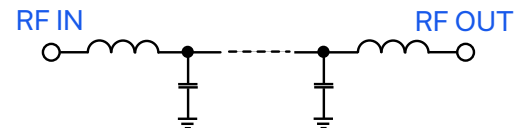

Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. B  
ECO-011891  
LFCN-722+  
MCL NY  
250611

PAGE 1 OF 3



Mini-Circuits®

CERAMIC

## Low Pass Filter

LFCN-722+


50Ω DC<sup>1</sup> to 7200 MHz

## PIN CONNECTIONS

|        |     |
|--------|-----|
| RF IN  | 1   |
| RF OUT | 3   |
| GROUND | 2,4 |

PRODUCT MARKING: N/A

DEMO BOARD MCL P/N: TB-LFCN-722+  
SUGGESTED PCB LAYOUT (PL-363)

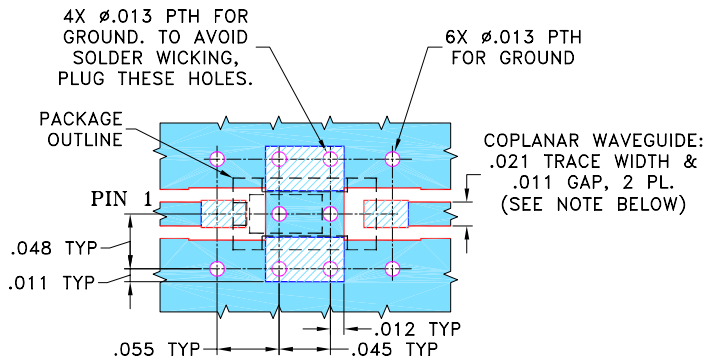


- NOTE:** 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS  $.010'' \pm .001''$ . COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.


 DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

## OUTLINE DRAWING

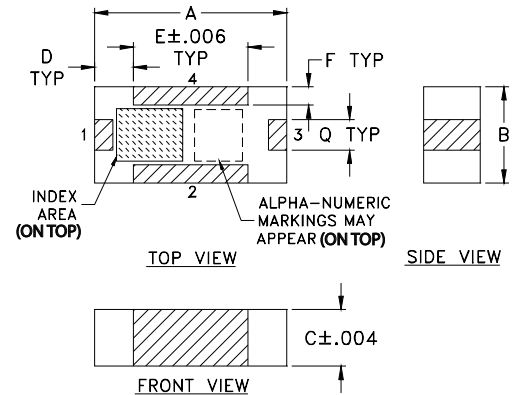

## PCB Land Pattern

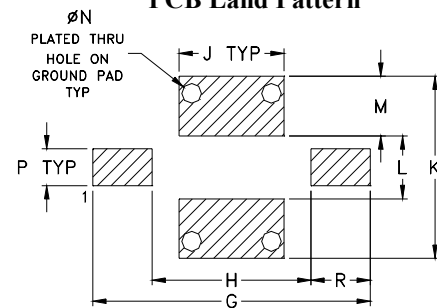

Suggested Layout,  
Tolerance to be within  $\pm .002$

## OUTLINE DIMENSIONS (Inches/mm)

| A    | B    | C    | D    | E    | F    | G    | H     | J    |
|------|------|------|------|------|------|------|-------|------|
| .126 | .063 | .037 | .026 | .075 | .012 | .182 | .104  | .069 |
| 3.20 | 1.60 | 0.94 | 0.66 | 1.91 | 0.30 | 4.62 | 2.64  | 1.75 |
| K    | L    | M    | N    | P    | Q    | R    | wt    |      |
| .119 | .041 | .039 | .013 | .024 | .020 | .039 | grams |      |
| 3.02 | 1.04 | 0.99 | 0.33 | 0.61 | 0.51 | 0.99 | grams | .020 |

## TAPE &amp; REEL INFORMATION: F75



Mini-Circuits

CERAMIC

# Low Pass Filter



LFCN-722+

50Ω

DC<sup>1</sup> to 7200 MHz

## TYPICAL PERFORMANCE DATA AT +25°C

| Frequency (MHz) | Insertion Loss (dB) | VSWR (:1) |
|-----------------|---------------------|-----------|
| 10              | 0.03                | 1.01      |
| 20              | 0.03                | 1.01      |
| 100             | 0.04                | 1.02      |
| 500             | 0.13                | 1.13      |
| 1000            | 0.24                | 1.27      |
| 3000            | 0.40                | 1.06      |
| 5000            | 1.13                | 2.01      |
| 7000            | 1.61                | 1.90      |
| 7200            | 1.86                | 2.04      |
| 7940            | 2.97                | 1.53      |
| 8980            | 40.03               | 12.57     |
| 9270            | 35.44               | 14.95     |
| 10060           | 38.50               | 17.62     |
| 12000           | 34.37               | 27.25     |
| 13000           | 33.44               | 31.09     |
| 14000           | 33.59               | 25.12     |
| 15000           | 34.09               | 18.20     |

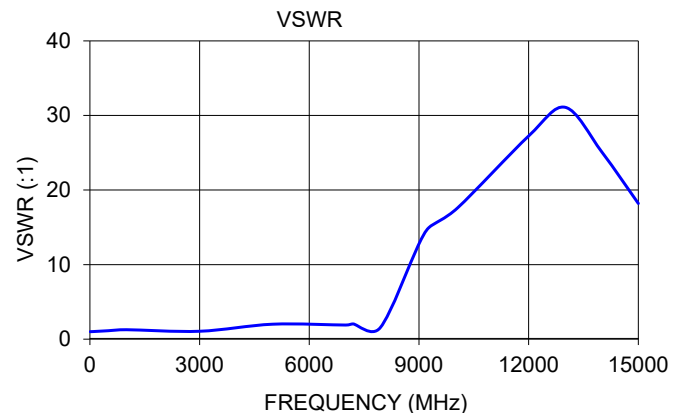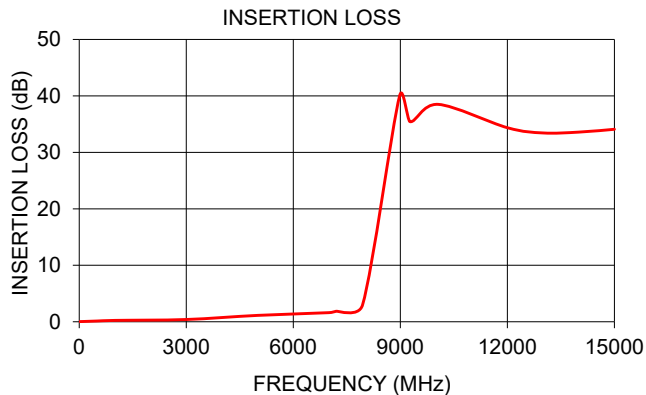

### NOTES

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)

