



Mini-Circuits®

ULTRA-SMALL CERAMIC

Power Splitter/Combiner

QCN-25D+

2 Way-90° 50Ω 1350 to 2450 MHz

FEATURES

- Low insertion loss, 0.4 dB typ.
- High isolation, 25 dB typ.
- Wrap-around terminal for excellent solderability
- Ultra small, 0.12"X0.06"X0.035"
- Patent pending



Generic photo used for illustration purposes only

CASE STYLE: FV1206-1

+RoHS Compliant

The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

APPLICATIONS

- Balanced amplifiers
- Modulators
- GPS
- PCS/DCS
- UMTS

ELECTRICAL SPECIFICATIONS AT +25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		1350		2450	MHz
Average Insertion Loss, above 3.0 dB	1350-1950		0.4	0.7	dB
	1950-2200		0.4	0.7	
	2200-2450		0.6	0.9	
Isolation	1350-1950	18	25		dB
	1950-2200	20	25		
	2200-2450	18	25		
Phase Unbalance	1350-1950		1	5	Degree
	1950-2200		1	4	
	2200-2450		1	4	
Amplitude Unbalance	1350-1950		0.5	1.1	dB
	1950-2200		0.5	1.0	
	2200-2450		0.5	1.1	
VSWR	1350-1950		1.2		(:1)
	1950-2200		1.15		
	2200-2450		1.2		


1. For applications requiring DC voltage to be applied to the RF ports. DC resistance to ground is 100 Mohms min.

ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-55°C to +100°C
Storage Temperature	-55°C to +100°C
Power Input (as a splitter)	15 W* max.

* Derate linearly to 7 W at +100°C ambient.
Permanent damage may occur if any of these limits are exceeded.

ELECTRICAL SCHEMATIC (NOTE 1)



Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. L
ECO-010311
QCN-25D+
ED-10849/4
MCL NY
250718
PAGE 1 OF 3




Power Splitter/Combiner

QCN-25D+

2 Way-90° 50Ω 1350 to 2450 MHz

SUM PORT	1
PORT 1 (0°)	4
PORT 2 (+90°)	6
GROUND	2,5
50 OHM TERM EXTERNAL	3

DEMO BOARD MCL P/N: TB-QCN-25D+
SUGGESTED PCB LAYOUT (PL-131)

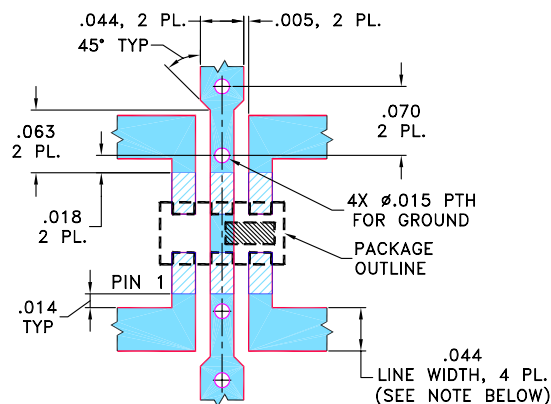

 DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

[illegible]

Suggested Layout,
Tolerance to be within $\pm.002$

OUTLINE DIMENSIONS (Inches) mm

A	B	C	D	E	F
.126	.063	.035	.024	.022	.011
3.20	1.60	0.89	0.61	0.56	0.28
G	H	J	K		wt
.039	.024	.042	.123		grams
0.99	0.61	1.07	3.12		.020

TAPE & REEL INFORMATION: F75





Mini-Circuits

ULTRA-SMALL CERAMIC

Power Splitter/Combiner




QCN-25D+

2 Way-90° 50Ω 1350 to 2450 MHz

TYPICAL PERFORMANCE DATA

Frequency (MHz)	Total Loss ² (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR (:1)		
	S-1	S-2				S	1	2
1275	2.95	3.83	0.88	21.24	88.32	1.19	1.20	1.18
1300	3.00	3.77	0.77	21.52	88.40	1.18	1.19	1.17
1400	3.17	3.56	0.38	22.67	88.67	1.15	1.16	1.14
1500	3.33	3.39	0.06	24.25	88.86	1.13	1.13	1.11
1600	3.45	3.26	0.20	26.05	88.99	1.11	1.10	1.09
1700	3.56	3.17	0.38	28.25	89.09	1.09	1.07	1.07
1800	3.63	3.12	0.50	30.93	89.14	1.08	1.05	1.05
1900	3.67	3.11	0.56	33.19	89.15	1.08	1.04	1.06
2000	3.67	3.14	0.53	33.29	89.15	1.08	1.04	1.07
2100	3.64	3.21	0.43	31.07	89.15	1.09	1.05	1.08
2200	3.58	3.33	0.25	28.67	89.17	1.11	1.08	1.10
2300	3.48	3.49	0.00	26.70	89.26	1.13	1.11	1.12
2400	3.35	3.69	0.35	25.09	89.34	1.16	1.14	1.16
2500	3.19	3.96	0.78	23.82	89.60	1.19	1.17	1.19
2550	3.10	4.13	1.03	23.23	89.77	1.21	1.19	1.21

2. Total Loss = Insertion Loss + 3 dB splitter loss.

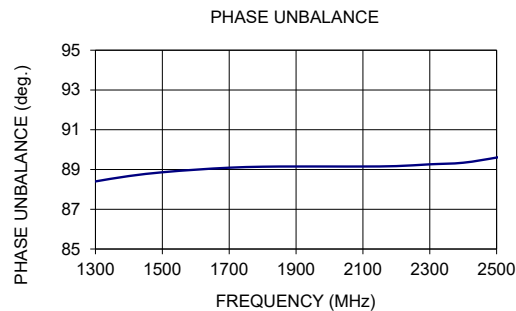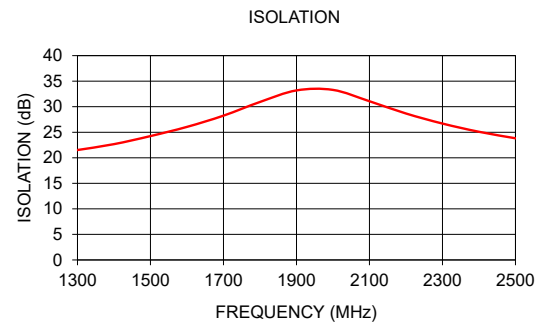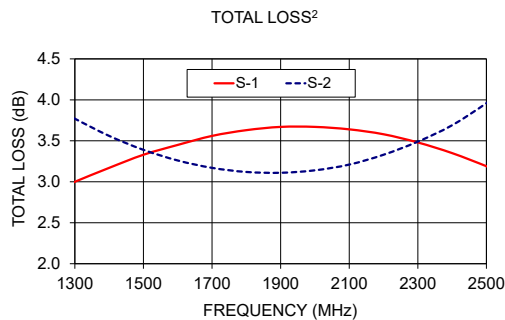

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

