



Mini-Circuits®

ULTRA-SMALL CERAMIC


Power Splitter/Combiner

QCN-34D+

2 Way-90° 50Ω 2500 to 3400 MHz

FEATURES

- Low insertion loss, 0.4 dB typ.
- High isolation, 32 dB typ.
- Wrap-around terminal for excellent solderability
- Ultra small, 0.12"X0.06"X0.035"
- Patent pending



Generic photo used for illustration purposes only

CASE STYLE: FV1206-1

+RoHS Compliant

The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

APPLICATIONS

- Balanced amplifiers
- Modulators
- MMDS
- Defense communications

ELECTRICAL SPECIFICATIONS AT +25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		2500		3400	MHz
Average Insertion Loss, above 3.0 dB	2500-2800		0.4	0.6	dB
	2800-3400		0.5	0.7	
Isolation	2500-2800	23	32		dB
	2800-3400	20	26		
Phase Unbalance	2500-2800		1	3	Degree
	2800-3400		1	4	
Amplitude Unbalance	2500-2800		0.4	0.9	dB
	2800-3400		0.5	1.2	
VSWR	2500-2800		1.15		(:1)
	2800-3400		1.15		

1. For applications requiring DC voltage to be applied to the RF ports. DC resistance to ground is 100 Mohms min.


ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-55°C to +100°C
Storage Temperature	-55°C to +100°C
Power Input (as a splitter)	15 W* max.

* Derate linearly to 7 W at +100°C ambient.

Permanent damage may occur if any of these limits are exceeded.

ELECTRICAL SCHEMATIC (NOTE 1)



Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. M
ECO-024655
QCN-34D+
ED-10885
MCL NY
250718
PAGE 1 OF 3



Power Splitter/Combiner

QCN-34D+

2 Way-90° 50Ω 2500 to 3400 MHz

SUM PORT	1
PORT 1 (0°)	4
PORT 2 (+90°)	6
GROUND	2,5
50 OHM TERM EXTERNAL	3

 DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

[illegible]

OUTLINE DIMENSIONS (Inches)

A	B	C	D	E	F
.126	.063	.035	.024	.022	.011
3.20	1.60	0.89	0.61	0.56	0.28
G	H	J	K		wt
.039	.024	.042	.123		grams
0.99	0.61	1.07	3.12		.020

TAPE & REEL INFORMATION: F75





Mini-Circuits

ULTRA-SMALL CERAMIC

Power Splitter/Combiner



QCN-34D+

2 Way-90° 50Ω 2500 to 3400 MHz

TYPICAL PERFORMANCE DATA

Frequency (MHz)	Total Loss ² (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR (:1)		
	S-1	S-2				S	1	2
2500	2.98	3.74	0.76	28.30	89.55	1.07	1.08	1.07
2525	2.99	3.72	0.73	28.62	89.57	1.07	1.08	1.07
2600	3.03	3.68	0.65	29.72	89.61	1.06	1.07	1.05
2650	3.05	3.67	0.61	30.42	89.64	1.05	1.06	1.04
2700	3.07	3.65	0.58	31.14	89.66	1.04	1.06	1.03
2825	3.11	3.63	0.52	32.59	89.71	1.03	1.05	1.02
2850	3.11	3.63	0.52	32.87	89.72	1.03	1.05	1.02
2950	3.12	3.64	0.52	33.11	89.72	1.02	1.04	1.03
3000	3.12	3.65	0.53	33.20	89.76	1.02	1.04	1.03
3075	3.12	3.68	0.56	32.83	89.78	1.02	1.03	1.04
3100	3.11	3.68	0.57	32.62	89.78	1.02	1.03	1.05
3175	3.10	3.72	0.62	32.01	89.80	1.03	1.02	1.05
3275	3.07	3.79	0.72	31.16	89.82	1.04	1.02	1.06
3375	3.03	3.87	0.84	30.26	89.87	1.05	1.01	1.07
3400	3.02	3.90	0.88	29.99	89.87	1.05	1.01	1.08

2. Total Loss = Insertion Loss + 3 dB splitter loss.

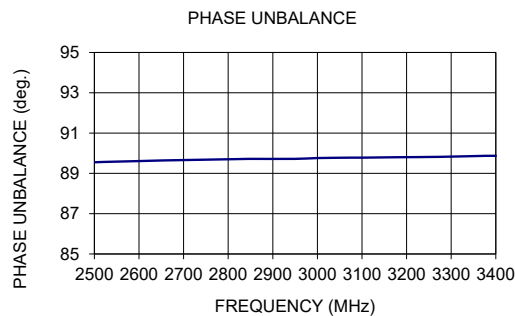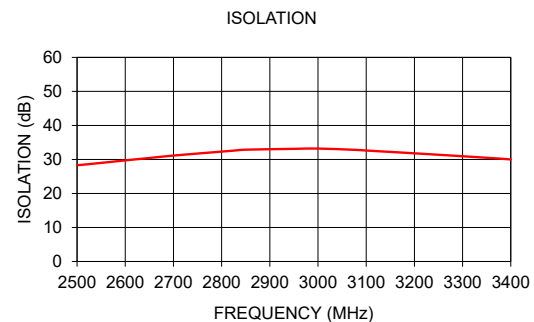

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

