

DC Pass, High Power Power Splitter/Combiner

ZC2PD-K5R44W+

2 Way-0° 50Ω 500 to 40000 MHz

The Big Deal

- Super wideband, 0.5 to 40 GHz
- Low insertion loss, 1.9 dB typ.
- High Isolation, 35 dB typ.
- 20W power handling
- Low amplitude unbalance, 0.10 dB typ.



CASE STYLE: UU2624

Product Overview

Mini-Circuits' ZC2PD-K5R44W+ is a super wideband 2-way 0° splitter/combiner providing coverage from 0.5 to 40 GHz, supporting a wide range of applications including 5G, Ku-Band, K-Band, instrumentation and many more. This model provides 20W power handling as a splitter and very low insertion loss across the entire operating frequency range, minimizing power dissipation and delivering excellent signal power transmission from input to output. The ZC2PD-K5R44W+ comes housed in a case measuring 1.04 x 5.87 x 0.5".

Key Features

Feature	Advantages
Ultra-wideband, 0.5 to 40 GHz	Extremely wide frequency range supports many broadband applications in a single model. Ideal for use in wideband instrumentation
Low insertion loss, 1.9 dB typ. at 22 GHz	The combination of 20W power handling and low insertion loss makes this model a suitable candidate for distributing signals while maintaining excellent transmission of signal power.
High isolation, 35 dB typ. at 22 GHz	Minimizes interference between ports.
High power handling: • 20W as a splitter at 25°C • 0.45W as a combiner	The ZC2PD-K5R44W+ is suitable for systems with a wide range of power requirements.
Low amplitude unbalance, 0.10 dB at 22 GHz	Produces nearly equal output signals, ideal for parallel path and multichannel systems.
DC Passing, 460mA	Supports applications where DC power is needed to pass through the RF line.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



2 Way-0° 50Ω 500 to 40000 MHz



CASE STYLE: UU2624

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Permanent damage may occur if any of these limits are exceeded.
* Derate linearly to 10W at 100°C

Sum Port	5
Port 1	1
Port 2	2

A	B	C	D	E	F	G
1.04	5.87	.50	.145	3.5	1.19	.118
26.42	149.10	12.70	3.68	88.90	30.23	3.00
H	J	K	L			wt
.52	.25	.520	.26			grams
13.21	6.35	13.21	6.60			150




- 5G
- Fixed satellite
- Space research
- Mobile

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		500		40000	MHz
Insertion Loss Above 3.0 dB	500 - 8000		0.6	1.5	dB
	8000 - 18000		1.3	2.1	
	18000 - 26500		1.9	2.6	
	26500 - 40000		2.7	3.5	
Isolation	500 - 8000	16	34		dB
	8000 - 18000	18	36		
	18000 - 26500	18	35		
	26500 - 40000	18	36		
Phase Unbalance (±) ¹	500 - 8000		0.2	3	Degree
	8000 - 18000		0.5	4	
	18000 - 26500		1.0	5	
	26500 - 40000		1.6	6	
Amplitude Unbalance (±) ¹	500 - 8000		0.05	0.2	dB
	8000 - 18000		0.08	0.3	
	18000 - 26500		0.10	0.4	
	26500 - 40000		0.11	0.5	
VSWR (Port 5)	500 - 8000		1.07	1.6	:1
	8000 - 18000		1.1	1.4	
	18000 - 26500		1.13	1.5	
	26500 - 40000		1.14	1.5	
VSWR (Port 1-2)	500 - 8000		1.08	1.4	:1
	8000 - 18000		1.09	1.4	
	18000 - 26500		1.15	1.5	
	26500 - 40000		1.15	1.5	

1. With reference to average.

Frequency (MHz)	Total Loss ¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
500	3.31	3.33	0.01	21.65	0.10	1.39	1.38	1.38
1000	3.29	3.31	0.02	36.53	0.00	1.04	1.04	1.06
2000	3.41	3.45	0.04	25.81	0.15	1.02	1.15	1.16
4000	3.62	3.65	0.03	32.32	0.20	1.08	1.14	1.13
8000	3.93	3.98	0.05	34.65	0.46	1.04	1.02	1.02
12000	4.25	4.32	0.07	35.21	0.80	1.15	1.13	1.13
16000	4.50	4.59	0.08	36.12	1.15	1.12	1.12	1.10
18000	4.62	4.71	0.08	47.55	1.33	1.06	1.05	1.01
22000	4.91	5.02	0.10	37.09	1.76	1.17	1.18	1.19
26000	5.19	5.28	0.09	39.37	2.34	1.17	1.22	1.15
30000	5.44	5.53	0.09	35.62	3.02	1.06	1.05	1.08
34000	5.77	5.82	0.05	37.82	3.43	1.11	1.21	1.21
36000	5.94	5.97	0.03	30.82	3.95	1.20	1.21	1.18
38000	6.09	6.10	0.00	30.07	4.16	1.23	1.15	1.15
40000	6.20	6.17	0.03	35.14	4.50	1.21	1.13	1.08

1. Total Loss = Insertion Loss + 3dB splitter theoretical loss.

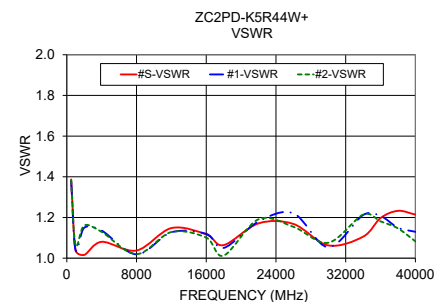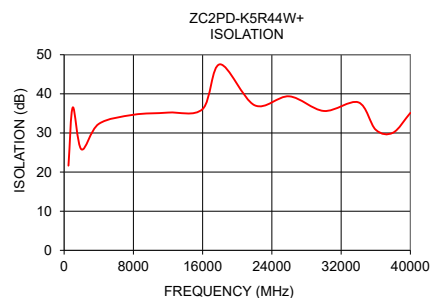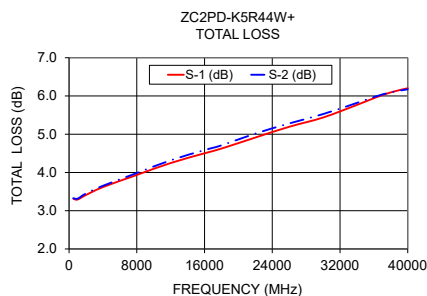

NOTES

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



REV. B
ECO-025176
ZC2PD-K5R44W+
MCL NY
250409
Page 2 of 2