

Coaxial
Low Pass Filter

ZLFW-K113+

50Ω DC to 11 GHz



The Big Deal

- Good Power Handling, 2.5 W
- Temperature Stable
- Broadband Connectorized Package
- Good Rejection, 35 dB Typ.

Generic photo used for illustration purposes only

CASE STYLE: UK3042

Product Overview

ZLFW-K113+ is a 50Ω low pass filter built in broadband connectorized package. Covering DC-11 GHz bandwidth, these units offer good matching within the passband and good rejection in stopband. ZLFW-K113+ offer low insertion loss, and good power handling capability. It handles up to 2.5W RF input power and provides a wide operating temperature range from -55°C to 125°C.

Key Features

Feature	Advantages
Low Passband Insertion Loss	Suitable for high performance applications.
2.5W Power Handling	Supports a range of system power requirements.
Connectorized Package	The connectorized package is easy to interface with other devices and well suited for test setups.

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

Low Pass Filter

50Ω

DC to 11 GHz

ZLFW-K113+

Features

- Good Rejection, 35 dB Typ.
- Temperature Stable



Generic photo used for illustration purposes only

CASE STYLE: UK3042	
Connectors	Model
2.92mm-F	ZLFW-K113+


+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Applications

- X-Band Radar
- Public Safety Communications

Functional Schematic

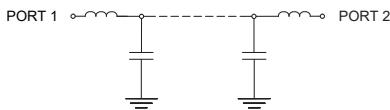

Electrical Specifications at 25°C							
Parameter		F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Passband	Insertion Loss	DC-F1	DC - 11000	—	2.1	3.1	dB
	Freq. Cut-Off	F2*	11900	—	3.0	—	dB
	Return Loss	DC-F1	DC - 11000	—	12	—	dB
Stopband	Rejection	F3-F4	14800 - 16000	19	35	—	dB
		F4-F5	16000 - 19000	23	34	—	dB
		F5-F6	19000 - 23500	22	31	—	dB
		F6-F7	23500 - 26500	—	20	—	dB

In Applications where DC voltage is present at either input or output ports, DC blocks are required.

* Typically, a ±5% frequency deviation from the stated value may occur on a unit-to-unit basis.

Maximum Ratings





Operating Temperature	-55°C to 125°C
Storage Temperature	-55°C to 125°C
RF Power Input*	2.5W max. @25°C

*Passband rating, derate linearly to 0.7W at 125°C ambient
Permanent damage may occur if any of these limits are exceeded.

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)
10	0.07	40.49
100	0.13	34.78
500	0.26	29.59
1000	0.35	30.11
2000	0.48	30.98
3000	0.58	22.09
6000	0.96	16.40
10000	1.54	15.35
11000	2.04	11.89
11900	2.66	11.27
12100	3.08	9.83
13600	18.66	1.56
14100	27.42	1.33
14800	42.35	1.30
16000	50.72	1.33
19000	37.35	1.15
20000	34.98	1.16
21000	33.63	1.26
23500	33.11	1.41
26500	25.52	1.38

Typical Frequency Response

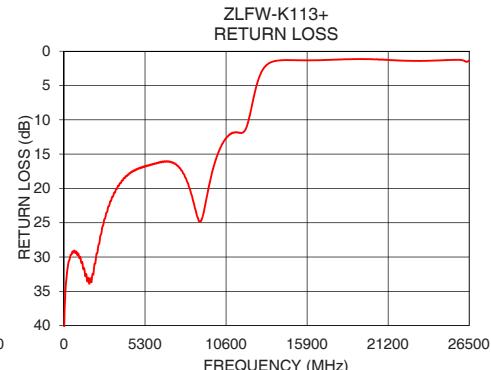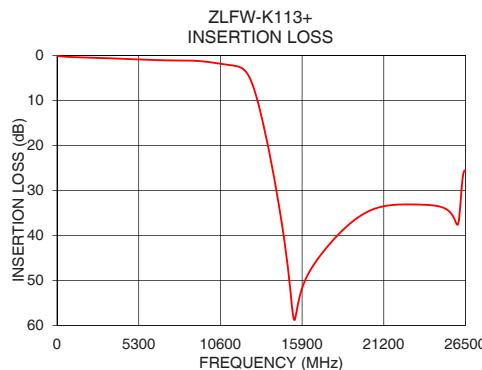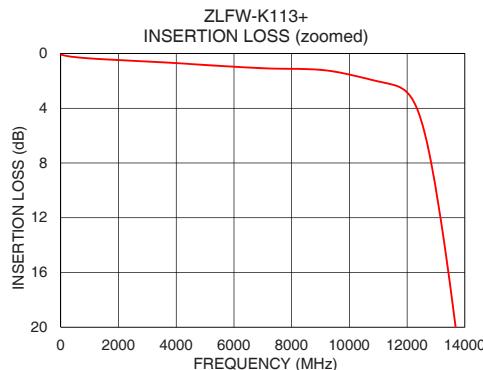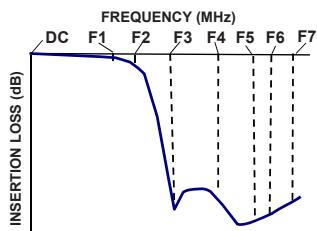


Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

Coaxial Connections

PORt - 1	2.92mm-Female
PORt - 2	2.92mm-Female

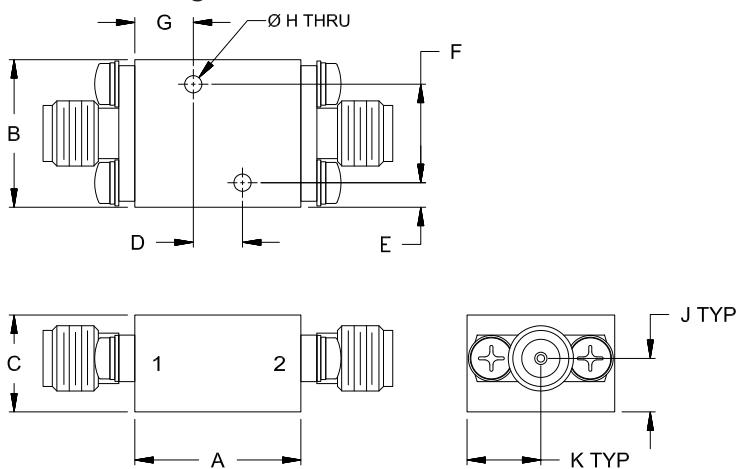Outline Drawing**Outline Dimensions (^{inch} mm)**

A	B	C	D	E	F
.68	.60	.39	.200	.10	.400
17.1	15.2	10.0	5.08	2.5	10.16
G	H	J	K		
.24	.070	.22	.30	Wt.	
6.0	1.78	5.5	7.6	grams	
					24

Note: Please refer to case style drawing for details

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

