

Solid State Relays

System Monitoring Relays (Sense Relay)

Type RA....S



- System (line and load) monitoring relay
- Zero switching
- Rated operational current: 25, 50 and 110 AACrms
- Rated operational voltage: 230, 400 and 480 VACrms
- High surge current capability
- Alarm output signal
- LED indication for alarm and supply



Product Description

The system monitoring solid state relay (sense relay) provides an alarm output in the event of a circuit failure. Internal circuits monitor:

- line voltage/line current
- correct functioning of the SSR
- SSR input status

The relay is designed for applications where immediate fault detection is required. A red LED indicates an alarm, a green LED indicates DC control supply OK (half LED light intensity) resp. relay switched ON (full LED light intensity).

Ordering Key

RA 23 25 H 06 PO S

Solid State Relay _____
 Switching mode _____
 Rated operational voltage _____
 Rated operational current _____
 Control input _____
 Blocking voltage _____
 Alarm output type _____
 Sense SSR _____

Type Selection

Switching mode	Rated operational voltage	Rated operational current input	Control voltage	Blocking voltage	Alarm output
A: Zero switching	23: 230 VACrms 40: 400 VACrms 48: 480 VACrms	25: 25 AACrms 50: 50 AACrms 110: 110 AACrms	H: Active high	06: 650 Vp 10: 1000 Vp 12: 1200 Vp	PO: PNP, NO PC: PNP, NC

Selection Guide

Rated op. voltage	Control input type	Alarm output	Rated operational current		
			25 AACrms	50 AACrms	110 AACrms
230 VACrms	Active high	PNP, NO PNP, NC	RA 2325 H06POS RA 2325 H06PCS		
400 VACrms	Active high	PNP, NO PNP, NC	RA 4025 H10POS RA 4025 H10PCS	RA 4050 H10POS RA 4050 H10PCS	RA 40110 H10POS RA 40110 H10PCS
480 VACrms	Active high	PNP, NO PNP, NC	RA 4825 H12POS RA 4825 H12PCS	RA 4850 H12POS RA 4850 H12PCS	RA 48110 H12POS RA 48110 H12PCS

General Specifications

	RA23..S	RA40..S	RA48..S
Operational voltage range	170 to 250 VACrms	150 to 440 VACrms	180 to 530 VAC
Blocking voltage	650 Vp	1000 Vp	1200 Vp
Zero voltage turn-on	≤ 15 V	≤ 15 V	≤ 15 V
Operational frequency range	45 to 65 Hz	45 to 65 Hz	45 to 65 Hz
Power factor cos φ	≥ 0.5 @ 230 VACrms	≥ 0.5 @ 400 VACrms	≥ 0.5 @ 480 VACrms
CE marking	Yes	Yes	Yes
Compliance	UR, CSA, EAC	UR, CSA, EAC	UR, CSA, EAC

Control Specifications

Supply voltage range	20 to 32 VDC
Supply current @ 24 VDC	≤ 40 mA DC
Response time pick-up @ 50 Hz	≤ 10 ms
Response time drop-out @ 50 Hz	≤ 10 ms
Active high control input	
Pick-up voltage	Typ. 7 VDC
Drop-out voltage	Typ. 6.8 VDC
Input current (Vc = 32 V)	≤ 4 mA

Alarm Specifications

PNP Alarm output NO	0 VDC
No alarm condition	Vcc - 2 VDC
Alarm voltage @ 100 mA	≤ 100 mA
Max. alarm output current	
PNP Alarm output NC	Vcc - 2 VDC
No alarm condition	0 VDC
Alarm voltage @ 100 mA	≤ 100 mA
Max. alarm output current	

Output Specifications

	RA..25..S	RA..50..S	RA..110..S
Rated operational current AC 51	≤ 25 Arms	≤ 50 Arms	≤ 110 Arms
AC 53a	5 Arms	15 Arms	30 Arms
Min. operational load current	≤ 200 mA	≤ 250 mA	≤ 500 mA
Non-rep. surge current t=10 ms	≤ 325 Ap	≤ 600 Ap	≤ 1900 Ap
Off-state leakage current @ rated voltage and frequency	≤ 6 mA	≤ 6 mA	≤ 6 mA
I ² t for fusing t=10 ms	≤ 525 A ² s	≤ 1800 A ² s	≤ 18000 A ² s
Critical dv/dt	≥ 500 V/μs	≥ 500 V/μs	≥ 500 V/μs

Sense Specifications

	RA23..S	RA40..S	RA48..S
Current			
Sensed load current	≥ 50 mA	≥ 50 mA	≥ 50 mA
Non-sensed leakage current	≤ 20 mA	≤ 20 mA	≤ 20 mA
Voltage			
Sensed line voltage	≥ 120 Vrms	≥ 150 Vrms	≥ 180 Vrms
Non-sensed line voltage	≤ 30 Vrms	≤ 50 Vrms	≤ 80 Vrms
Timing			
Response time from fault to alarm output	≤ 100 ms	≤ 100 ms	≤ 100 ms
Short-circuit of semiconductor	Will be sensed	Will be sensed	Will be sensed

Thermal Specifications

	RA..25..S	RA..50..S	RA..110..S
Operating temperature	-20°C to +70°C (-4°F to +158°F)	-20°C to +70°C (-4°F to +158°F)	-20°C to +70°C (-4°F to +158°F)
Storage temperature	-40°C to +100°C (-40°F to +212°F)	-40°C to +100°C (-40°F to +212°F)	-40°C to +100°C (-40°F to +212°F)
Junction temperature	≤ 125°C (257°F)	≤ 125°C (257°F)	≤ 125°C (257°F)
R _{th} junction to case	≤ 1.25 °C/W	≤ 0.65 °C/W	≤ 0.30 °C/W
R _{th} junction to ambient	≤ 12 °C/W	≤ 12 °C/W	≤ 12 °C/W


Environmental Specifications

Pollution degree	2 (non-conductive pollution with possibilities of condensation)
EU RoHS compliant	Yes
China RoHS compliant	Refer to Environmental Information (Page 6)


Isolation

Rated isolation voltage	
Input to output	≥ 4000 VACrms
Output to case	≥ 4000 VACrms


Functional Diagram

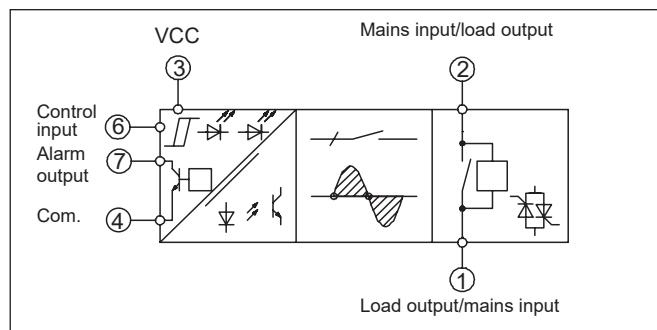

Wiring Diagrams

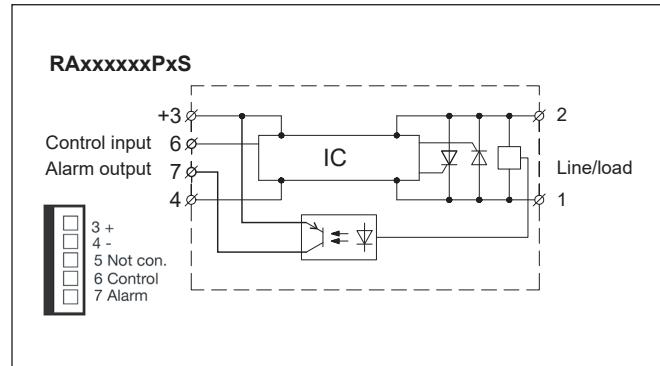

Operation Diagram

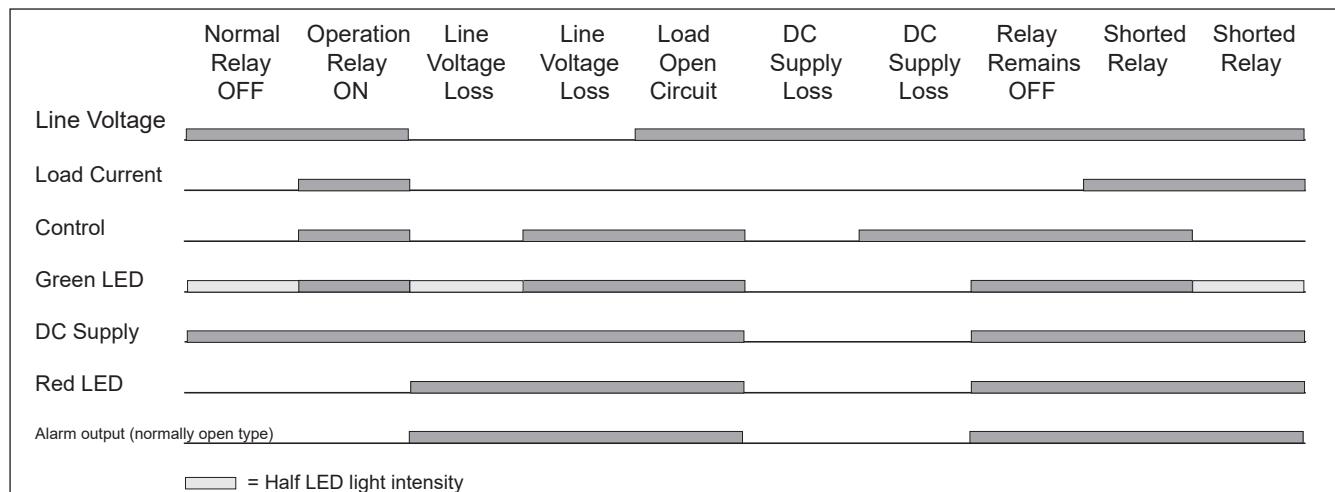

Heatsink Dimensions (load current versus ambient temperature)

RA ..25S

Load current [A]	Thermal resistance [°C/W]					Power dissipation [W]
	20	30	40	50	60	
25.0	2.00	1.70	1.4	1.00	0.71	0.40
22.5	2.50	2.10	1.80	1.40	1.00	0.66
20.0	3.10	2.70	2.30	1.90	1.4	1.00
17.5	4.00	3.50	3.00	2.50	2.00	1.40
15.0	4.90	4.30	3.70	3.10	2.50	1.90
12.5	6.2	5.40	4.60	3.90	3.10	2.30
10.0	8.10	7.10	6.10	5.10	4.00	3.00
7.5	11.30	9.90	8.50	7.10	5.60	4.20
5.0	-	15.6	13.3	11.1	8.9	6.7
2.5	-	-	-	-	18.7	14


RA ..50S

Load current [A]	Thermal resistance [°C/W]					Power dissipation [W]
	20	30	40	50	60	
50.0	0.92	0.76	0.60	0.45	0.29	-
45.0	1.2	0.99	0.80	0.62	0.44	0.26
40.0	1.5	1.3	1.1	0.85	0.63	0.42
35.0	1.9	1.6	1.4	1.1	0.89	0.63
30.0	2.4	2.1	1.8	1.5	1.2	0.91
25.0	3.0	2.7	2.3	1.9	1.5	1.10
20.0	3.9	3.5	3.0	2.5	2.0	1.5
15.0	5.5	4.8	4.1	3.4	2.7	2.1
10.0	8.6	7.5	6.4	5.4	4.3	3.2
5.0	17.9	15.6	13.4	11.2	8.9	6.7

RA ..110S

Load current [A]	Thermal resistance [°C/W]					Power dissipation [W]
	20	30	40	50	60	
110	0.43	0.35	0.27	-	-	-
90	0.63	0.53	0.42	0.32	-	-
80	0.81	0.69	0.57	0.45	0.33	-
70	1.00	0.89	0.75	0.61	0.47	0.33
60	1.30	1.20	1.00	0.83	0.66	0.49
50	1.70	1.50	1.30	1.10	0.85	0.64
40	2.20	1.90	1.70	1.40	1.10	0.83
30	3.10	2.70	2.30	1.90	1.50	1.20
20	4.80	4.20	3.60	3.00	2.40	1.80
10	10.0	8.80	7.50	6.30	5.00	3.80

Heatsink Selection

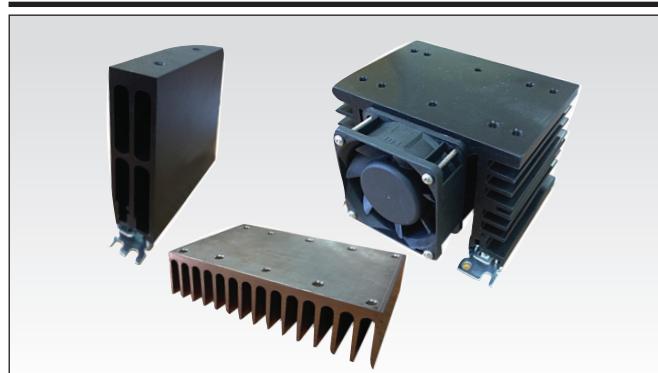

Heatsink Range Overview :

https://gavazziautomation.com/images/PIM/DATASHEET/ENG/SSR_Accessories.pdf

Heatsink Selector Tool :


<http://www.gavazziautomation.com/en-global/products/solid-state-relays/heatsink-selector-tool>

Ordering Key

RHS..

- Heatsinks and fans
- 5.40°C/W to 0.12°C/W thermal resistance
- DIN, panel or thru wall mounting
- Single or multiple SSR mounting

Dimensions

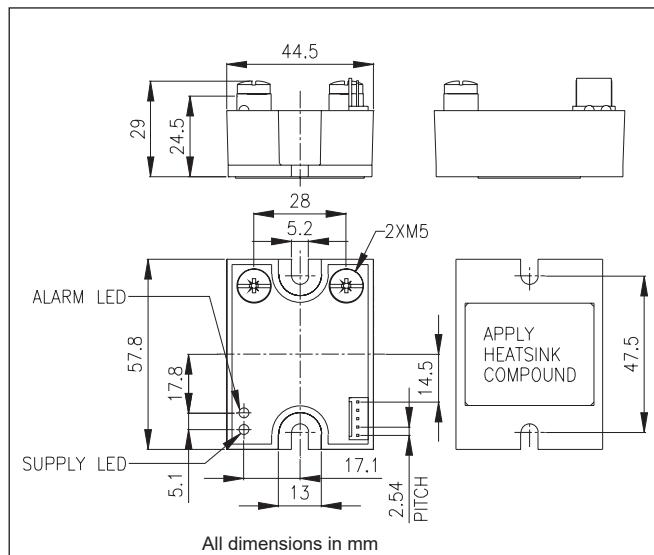

Housing Specifications

Weight	Approx. 100 g
Housing material	Noryl GFN 1, black
Base plate 25, 50 A 110 A	Aluminium, nickel-plated Copper, nickel-plated
Potting compound	Polyurethane
Relay	
Mounting screws	M5
Mounting torque	$\leq 1.5 \text{ Nm}$
Power terminal	
Mounting screws	M3 x 6
Mounting torque	$\leq 2.4 \text{ Nm}$
Control connector	5 pole, centre distance 2.54 mm

Accessories

Accessories can be ordered pre-assembled with Solid State Relays. These include Heatsinks, DIN rail adaptors, fuses, varistors and spacers.

For further information refer to Accessories datasheets at:
https://gavazziautomation.com/images/PIM/DATASHEET/ENG/SSR_Accessories.pdf

Ribbon Cable Selection

RCS 5-200-1

R-System cable	_____
No. of wires	_____
Cable length in cm	_____
Termination at one end	_____

Environmental Information

The declaration in this section is prepared in compliance with People's Republic of China Electronic Industry Standard SJ/T11364-2014: Marking for the Restricted Use of Hazardous Substances in Electronic and Electrical Products.

Part Name	Toxic or Harardous Substances and Elements					
	Lead (Pb)	Mercury (Hg)	Cadmium (Cd)	Hexavalent Chromium (Cr(VI))	Polybrominated biphenyls (PBB)	Polybrominated diphenyl ethers (PBDE)
Power Unit Assembly	X	O	O	O	O	O
O: Indicates that said hazardous substance contained in homogeneous materials for this part are below the limit requirement of GB/T 26572.						
X: Indicates that said hazardous substance contained in one of the homogeneous materials used for this part is above the limit requirement of GB/T 26572.						

环境特性

这份申明根据中华人民共和国电子工业标准
SJ/T11364-2014 : 标注在电子电气产品中限定使用的有害物质

零件名称	有毒或有害物质与元素					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr(VI))	多溴化联苯 (PBB)	多溴联苯醚 (PBDE)
功率单元	X	O	O	O	O	O
O:此零件所有材料中含有的该有害物低于GB/T 26572的限定。						
X:此零件某种材料中含有的该有害物高于GB/T 26572的限定。						

