


QSiC™ 1200V SiC Six-Pack Module

V_{DS}	1200 V
$R_{DS,on}$	82.0 mΩ
$I_D (T_C=25°C)$	29 A
$T_{J,max}$	175°C

Features

- High speed switching SiC MOSFETs
- Reliable body diode
- All parts tested to greater than 1,350V
- Kelvin reference for stable operation
- Press fit terminal connections
- Split DC negative terminals

Package

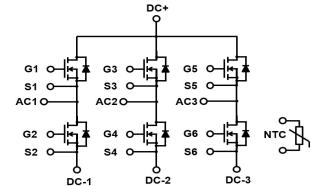

Benefits

- Low switching losses
- Low junction to case thermal resistance
- Very rugged and easy mounting
- Direct mounting to heatsink (isolated package)

Applications

- AC/DC converter
- PFC boost converter
- Battery charger
- Energy storage system
- Motor drives

Part #	Package	Marking
GCMX080A120B2T1P	B2	GCMX080A120B2T1P

Ordering Information on Page 3



Absolute Maximum Ratings, at $T_J=25^\circ\text{C}$, unless otherwise specified

Characteristics	Symbol	Conditions	Values	Unit
Drain-Source Voltage	V_{rated}	$V_{GS}=0\text{V}$, $I_{DS}=1\mu\text{A}$	1200	V
Continuous Drain Current	I_{DS}	$T_C=25^\circ\text{C}$, $V_{GS}=18\text{V}$, $T_J=175^\circ\text{C}$	29	A
		$T_C=65^\circ\text{C}$, $V_{GS}=18\text{V}$, $T_J=175^\circ\text{C}$	25	
Body Diode Drain Current	I_{SD}	$T_C=25^\circ\text{C}$, $V_{GS}=-5\text{V}$, $T_J=175^\circ\text{C}$	23	
Pulsed Drain Current	$I_{DS,\text{pulse}}$	$T_C=25^\circ\text{C}$, $V_{GS}=18\text{V}$	70	
Gate Source Voltage	$V_{GS\text{max}}$		-8/22	V
	$V_{GS\text{op}}$	Recommended operational	-4.5/18	
Power Dissipation	P_{tot}	$T_C=25^\circ\text{C}$, $T_J=175^\circ\text{C}$	103	W
Junction Temperature	T_J	Continuous	-40...175	°C
Case & Storage Temperature	T_C , T_{storage}	Continuous	-40...150	°C

Static Electrical Characteristics, at $T_J=25^\circ\text{C}$, unless otherwise specified

Characteristics	Symbol	Conditions	Values			Unit
			min.	typ.	max.	
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{\text{GS}}=0\text{V}, I_{\text{DS}}=1\text{mA}$	1200	-	-	V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{\text{DS}}=1200\text{V}, V_{\text{GS}}=0\text{V}$	-	0.1	1	μA
		$V_{\text{DS}}=1200\text{V}, V_{\text{GS}}=0\text{V}, T_J=150^\circ\text{C}$	-	1	100	
Gate-Source Leakage Current	$I_{\text{GSS+}}$	$V_{\text{GS}}=22\text{V}, V_{\text{DS}}=0\text{V}$	-	10	1000	nA
		$V_{\text{GS}}=-8\text{V}, V_{\text{DS}}=0\text{V}$	-	-10	-1000	
Gate Threshold Voltage	$V_{\text{GS}(\text{th})}$	$V_{\text{GS}}=V_{\text{DS}}, I_{\text{DS}}=5\text{mA}$	1.8	3.8	4	V
		$V_{\text{GS}}=V_{\text{DS}}, I_{\text{DS}}=5\text{mA}, T_J=150^\circ\text{C}$	-	2.8	-	
Drain-Source On-Resistance	R_{DSon}^{**}	$V_{\text{GS}}=18\text{V}, I_{\text{DS}}=10\text{A}$	-	82	100	$\text{m}\Omega$
		$V_{\text{GS}}=18\text{V}, I_{\text{DS}}=10\text{A}, T_J=150^\circ\text{C}$	-	116	-	
Transconductance	g_{fs}	$V_{\text{DS}}=20\text{V}, I_{\text{DS}}=10\text{A}$	-	5.7	-	S
		$V_{\text{DS}}=20\text{V}, I_{\text{DS}}=10\text{A}, T_J=150^\circ\text{C}$	-	5.9	-	
Internal Gate Resistance	$R_{\text{G(int)}}$	$f=1\text{MHz}, V_{\text{AC}}=25\text{mV}, \text{D-S Short}$	-	3.1	-	Ω

** R_{DSon} including package resistanceAC Electrical Characteristics, at $T_J=25^\circ\text{C}$, unless otherwise specified

Characteristics	Symbol	Conditions	Values			Unit
			min.	typ.	max.	
Input Capacitance	C_{ISS}	$V_{\text{GS}}=0\text{V},$	-	1.4	-	nF
Output Capacitance	C_{OSS}	$V_{\text{DS}}=800\text{V},$	-	0.09	-	
Reverse Transfer Capacitance	C_{RSS}	$f=200\text{kHz}, V_{\text{AC}}=25\text{mV}$	-	0.01	-	
Coss Stored Energy	E_{OSS}^{***}		-	33	-	μJ
Turn-On Switching Energy	E_{ON}	$T_J=25^\circ\text{C}$	-	0.10	-	mJ
		$T_J=125^\circ\text{C}$	-	0.12	-	
		$T_J=150^\circ\text{C}$	-	0.13	-	
Turn-Off Switching Energy	E_{OFF}	$T_J=25^\circ\text{C}$	-	0.02	-	
		$T_J=125^\circ\text{C}$	-	0.02	-	
		$T_J=150^\circ\text{C}$	-	0.02	-	
Turn-On Delay Time	$t_{\text{D(on)}}$		-	12	-	ns
Rise Time	t_{R}	$V_{\text{DD}}=600\text{V}, I_{\text{DS}}=10\text{A},$	-	4	-	
Turn-Off Delay Time	$t_{\text{D(off)}}$	$R_{\text{G(ext)}}=6.8\Omega,$	-	22	-	
Fall Time	t_{F}	$V_{\text{GS}}=-4.5/+18\text{V}, L=975\mu\text{H},$	-	18	-	
Total Gate Charge	Q_{G}		-	56	-	nC
Gate to Source Charge	Q_{GS}	$V_{\text{DD}}=800\text{V}, I_{\text{DS}}=10\text{A},$	-	22	-	
Gate to Drain Charge	Q_{GD}	$V_{\text{GS}}=-4.5/+18\text{V}$	-	13	-	

*** E_{OSS} is calculated from C_{OSS} curve

Freewheeling Diode Characteristics, at $T_J=25^\circ\text{C}$, unless otherwise specified

Characteristics	Symbol	Conditions	Values			Unit	
			min.	typ.	max.		
Diode Forward Voltage	V_{SD}	$V_{GS}=-5\text{V}$, $I_{SD}=10\text{A}$	-	4.2	-	V	
		$V_{GS}=-5\text{V}$, $I_{SD}=10\text{A}$, $T_J=150^\circ\text{C}$	-	3.7	-		
Reverse Recovery Time	t_{RR}	$T_J=25^\circ\text{C}$	$I_S=10\text{A}$, $V_R=600\text{V}$, $V_{GS}=-4.5\text{V}$, $dI/dt=3.9\text{A/ns}$	-	16	-	ns
Reverse Recovery Charge	Q_{RR}			-	129	-	nC
Peak Reverse Recovery Current	I_{RRM}			-	18	-	A
Reverse Recovery Energy	E_{RR}	$T_J=25^\circ\text{C}$	$I_S=10\text{A}$, $V_R=600\text{V}$,	-	0.03	-	mJ
		$T_J=125^\circ\text{C}$	$V_{GS}=-4.5/18\text{V}$,	-	0.05	-	
		$T_J=150^\circ\text{C}$	$R_{G(ext)}=6.8\Omega$	-	0.06	-	

Thermal and Package Characteristics, at $T_J=25^\circ\text{C}$, unless otherwise specified

Characteristics	Symbol	Conditions	Values			Unit
			min.	typ.	max.	
Thermal resistance, junction-case	R_{thJC}		-	1.26	1.46	°C/W
Thermal resistance, junction-heatsink	R_{thJH}	Thermal grease, Thickness = 50μm, $k = 4.4 \text{ W/mK}$	-	1.90	-	°C/W
Mounting torque	M_d	M4-0.7 screws	-	2.00	2.3	N·m
Press fit pin PCB end hole diameter			0.99	-	1.09	mm
Press fit pin PCB hole drill diameter			1.12	1.15	-	mm
Press fit pin PCB hole copper thickness			25	-	50	μm
Package weight	W_t		-	40	-	g
Isolation voltage	V_{ISOL}	$I_{ISOL} < 1\text{mA}, 50/60 \text{ Hz}, 1 \text{ min}$	3000	-	-	V

NTC Characteristics, at $T_J=25^\circ\text{C}$, unless otherwise specified

Characteristics	Symbol	Conditions	Values			Unit
			min.	typ.	max.	
Rated resistance	R_{NTC}	$T_{NTC} = 25^\circ\text{C}$	-	5.0	-	kΩ
Resistance tolerance	$\Delta R/R$		-5	-	5	%
Beta Value ($T_2 = 50^\circ\text{C}$)	$\beta_{25/50}$		-	3380	-	k
Beta Value ($T_2 = 80^\circ\text{C}$)	$\beta_{25/80}$		-	3440	-	k
Power dissipation	P_{MAX}	$T_{NTC} = 25^\circ\text{C}$	-	-	50	mW

Ordering Information

Ordering Part Number	Marking	Description	Shipping
GCMX080A120B2T1P	GCMX080A120B2T1P	B2, press fit pins	40 units/blister tray
GCMX080A120B2T1P-T	GCMX080A120B2T1P-T	B2, press fit pins, pre-applied thermal interface material (TIM)	40 units/blister tray

Typical Performance

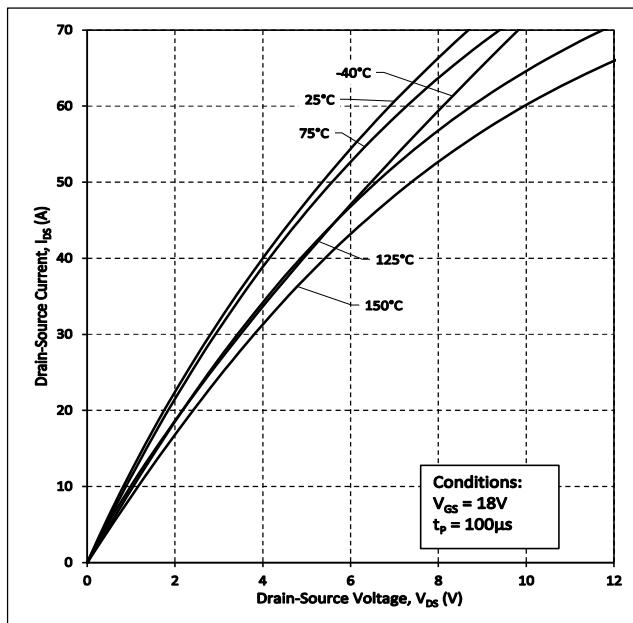


Figure 1. Output Characteristics for Various Temperatures

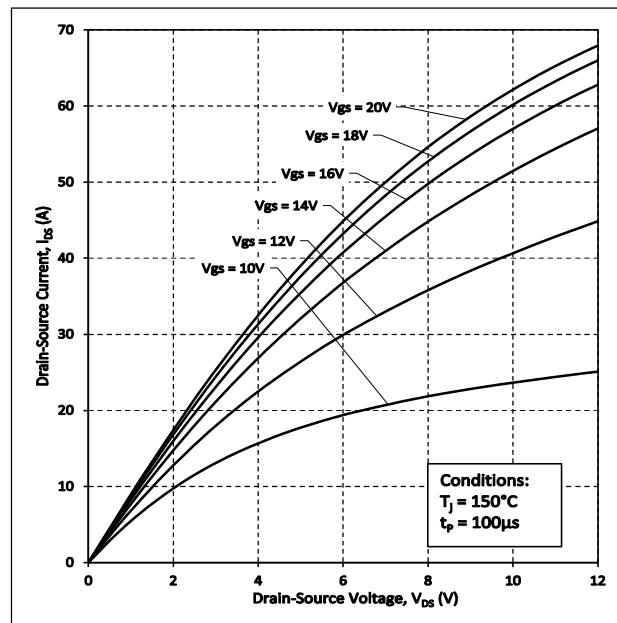


Figure 2. Output Characteristics $T_J = 150^\circ C$

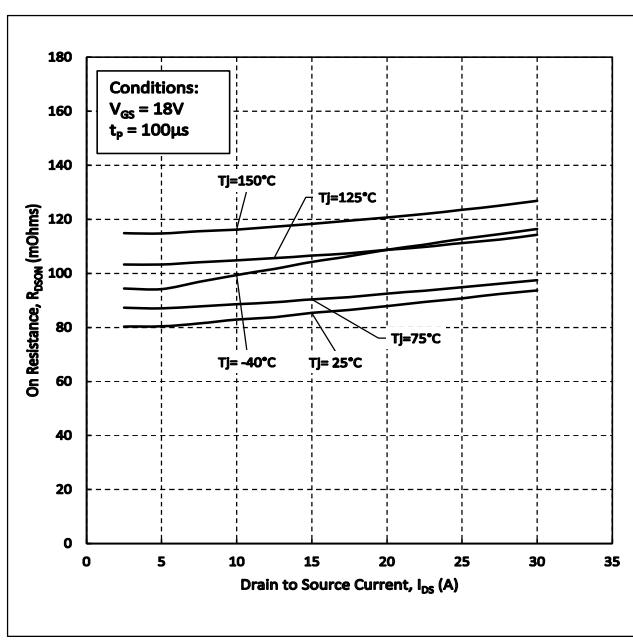


Figure 3. On-Resistance vs. Drain Current For Various Temperatures

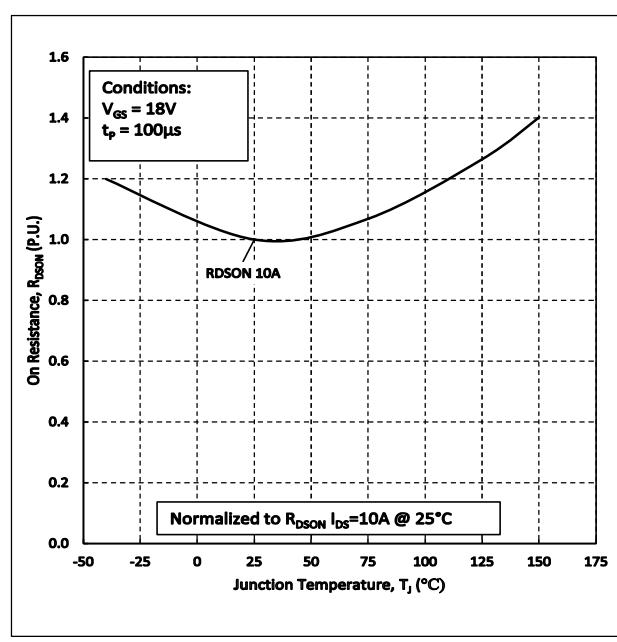
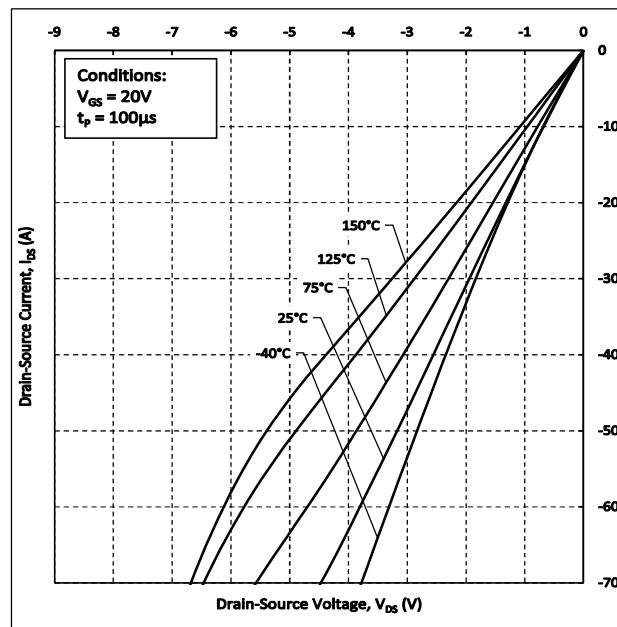
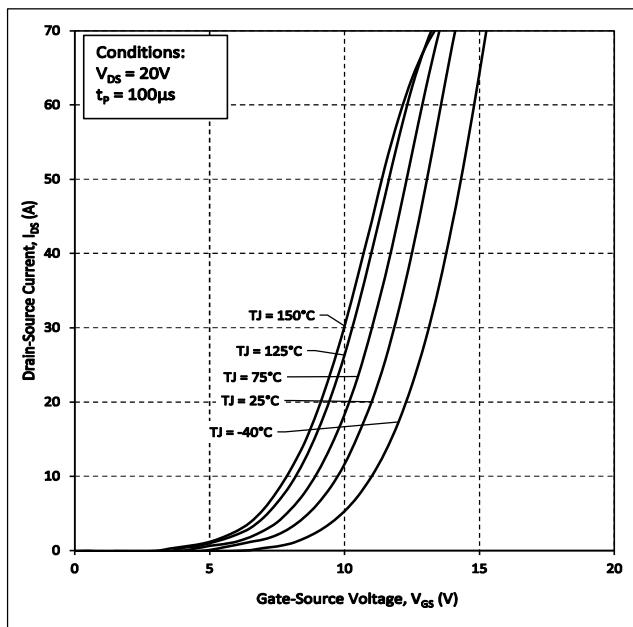
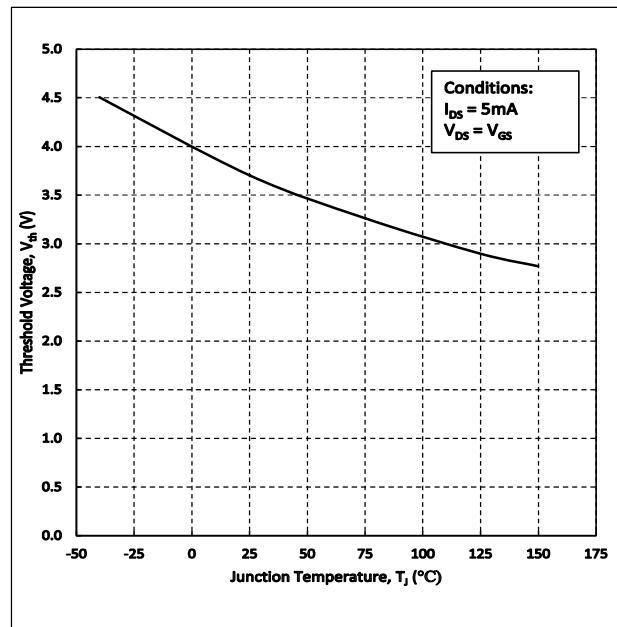
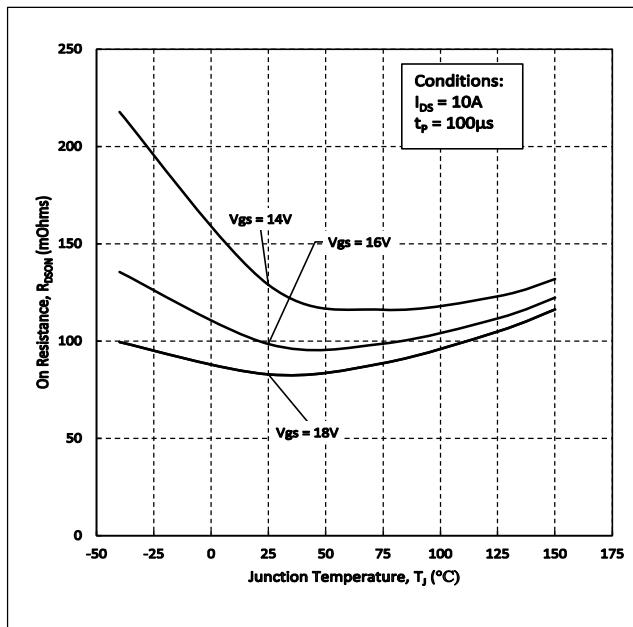


Figure 4. Normalized On-Resistance vs. Temperature






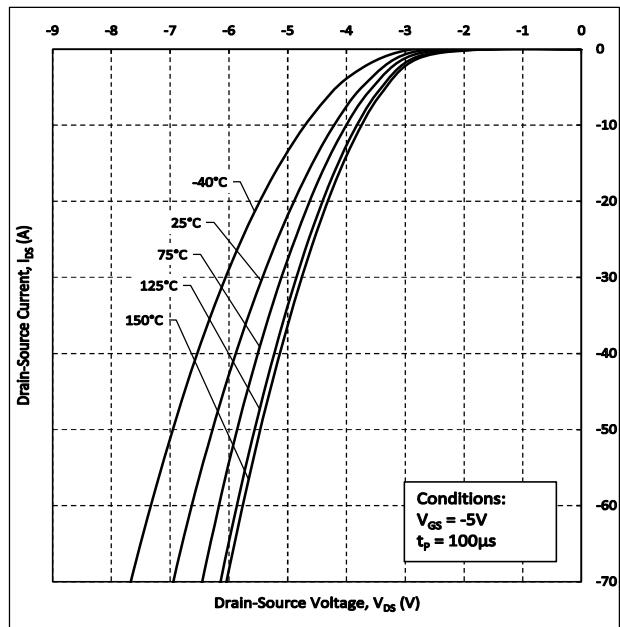


Figure 9. Body Diode Characteristics at $V_{GS} = 0V$

Figure 10. Body Diode Characteristics at $V_{GS} = -5V$

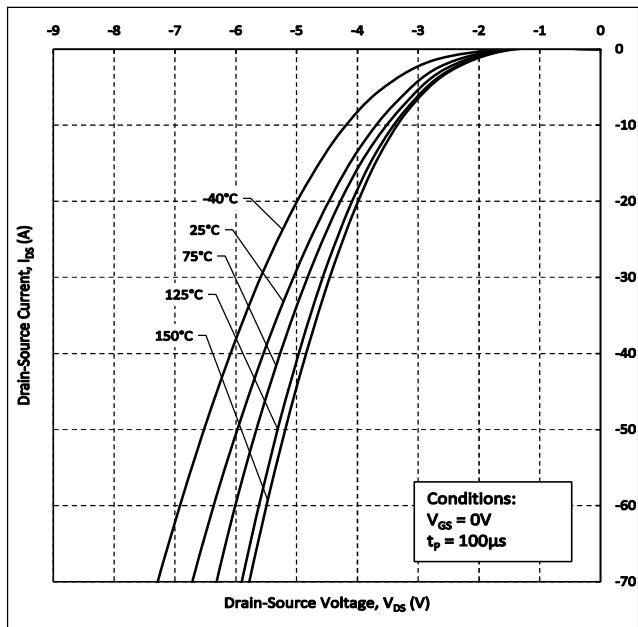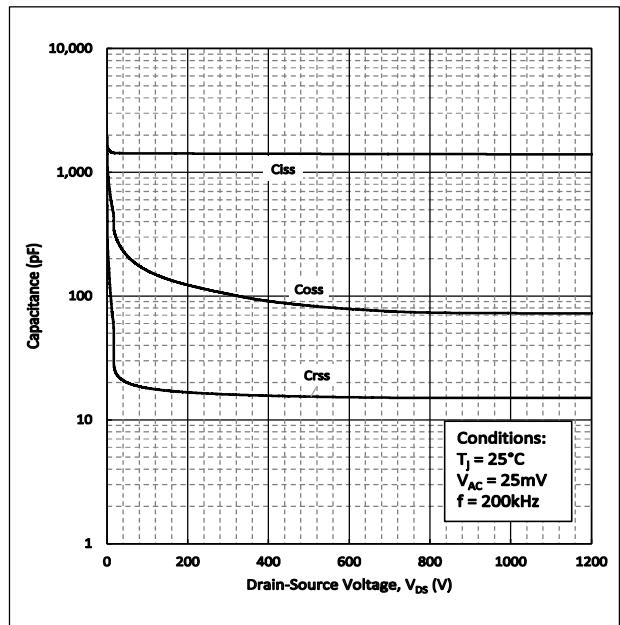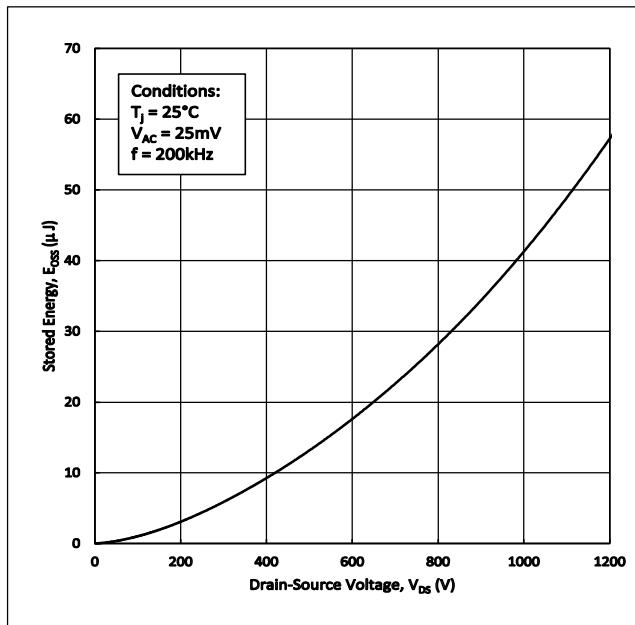

QSiC™ 1200V SiC Six-Pack Module

GCMX080A120B2T1P

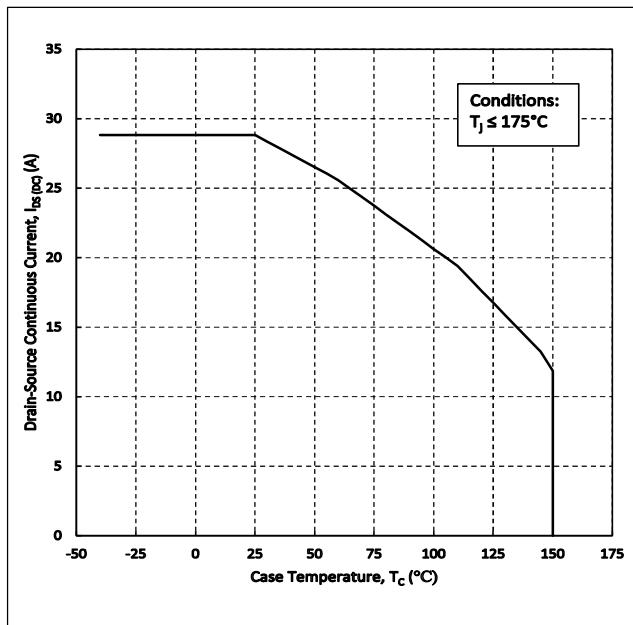


Figure 13. Continuous Drain Current Derating vs. Case Temperature

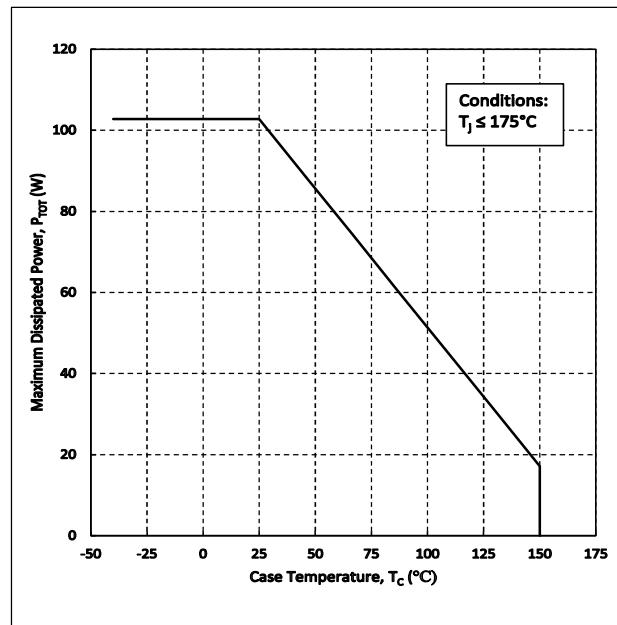


Figure 14. Maximum Power Dissipation Derating vs. Case Temperature

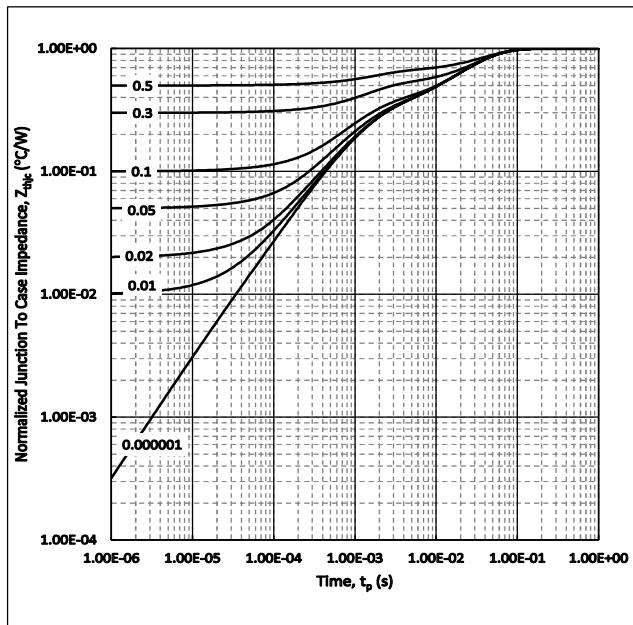


Figure 15. Transient Thermal impedance (Junction to Case)

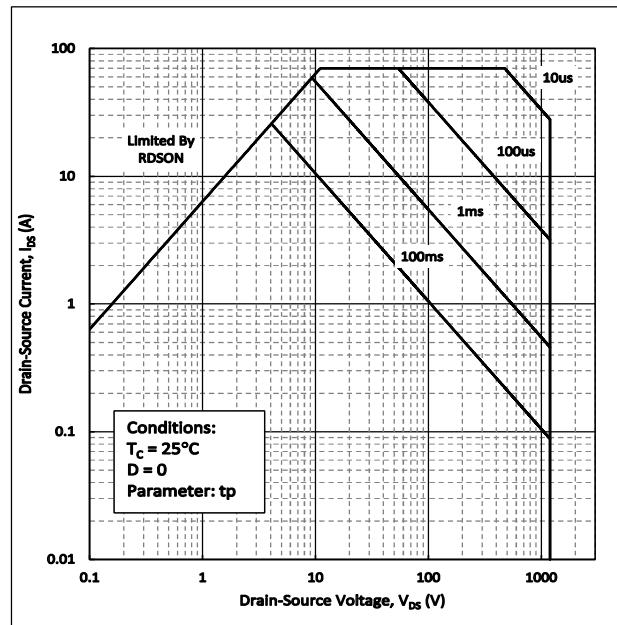


Figure 16. Safe Operating Area

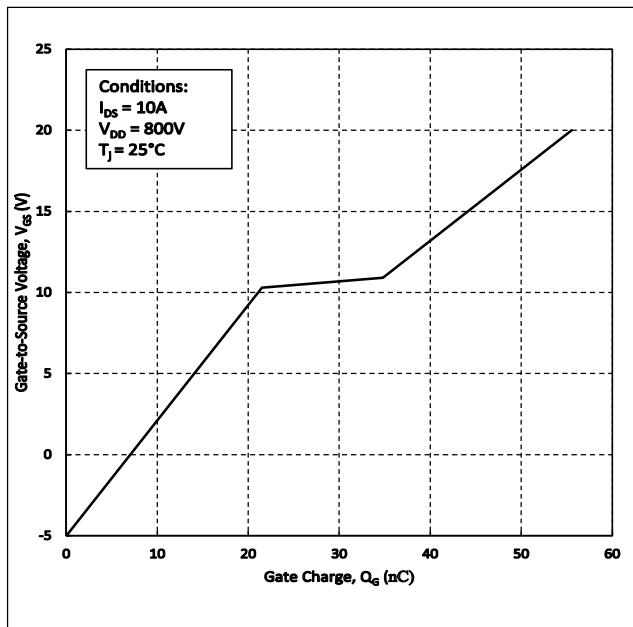


Figure 17. Gate Charge Characteristics

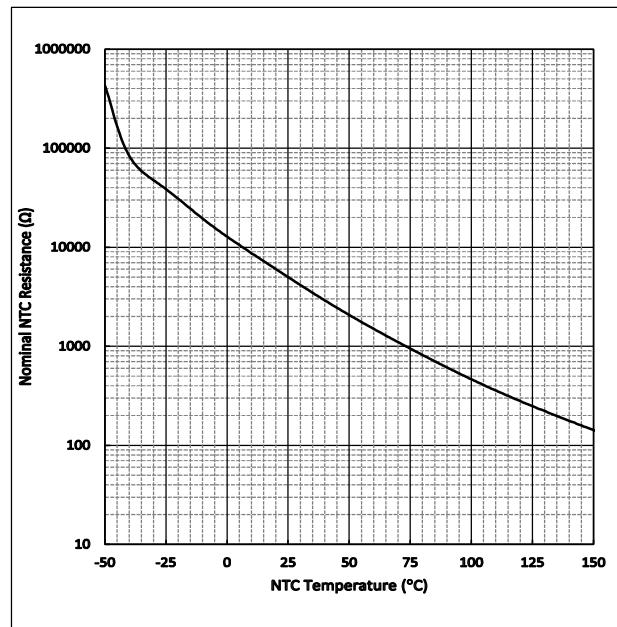


Figure 18. Nominal NTC Resistance vs. Temperature

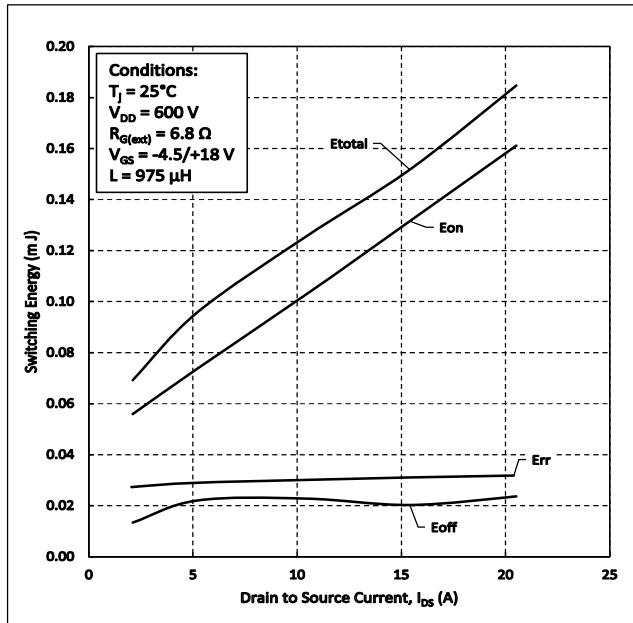


Figure 19. Clamped Inductive Switching Energy vs. Drain Current (600V)

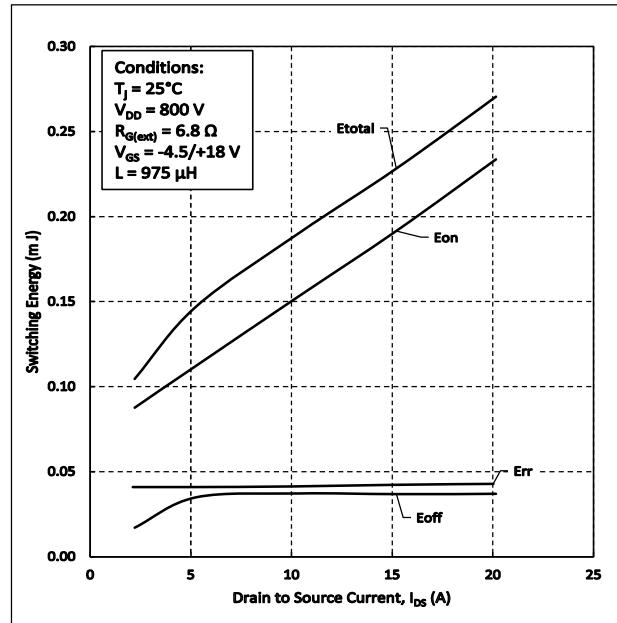


Figure 20. Clamped Inductive Switching Energy vs. Drain Current (800V)

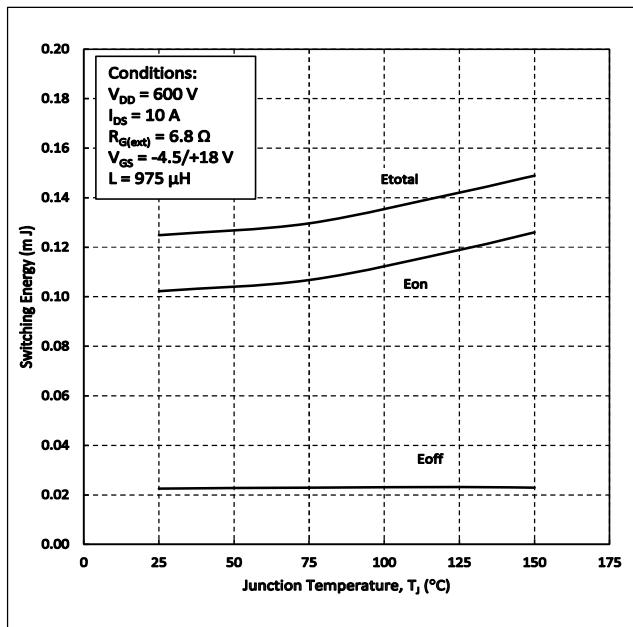


Figure 21. Clamped Inductive Switching Energy vs. Temperature

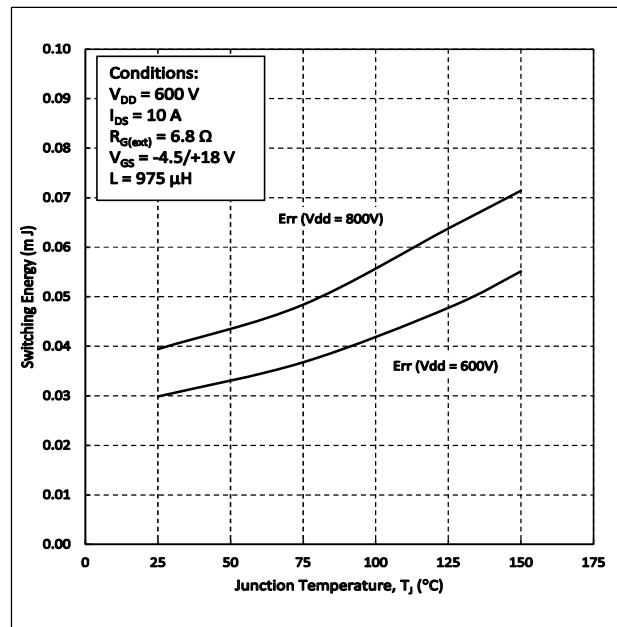


Figure 22. Reverse Recovery Energy vs. Temperature

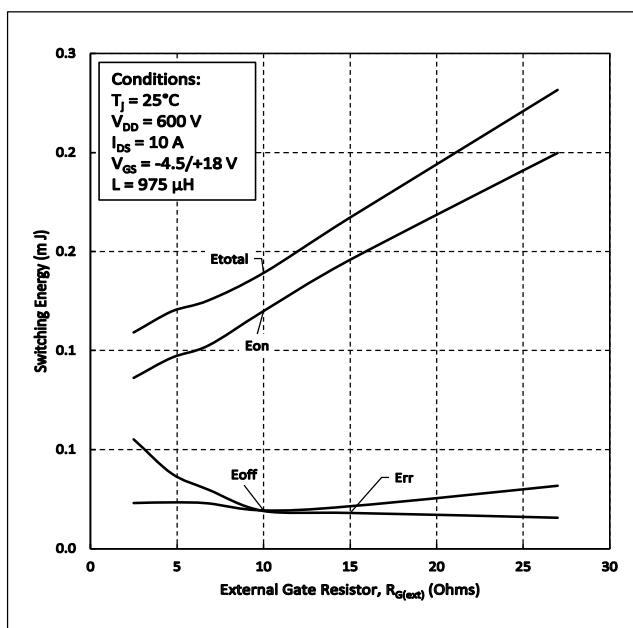


Figure 23. Clamped Inductive Switching Energy vs. $R_{G(ext)}$

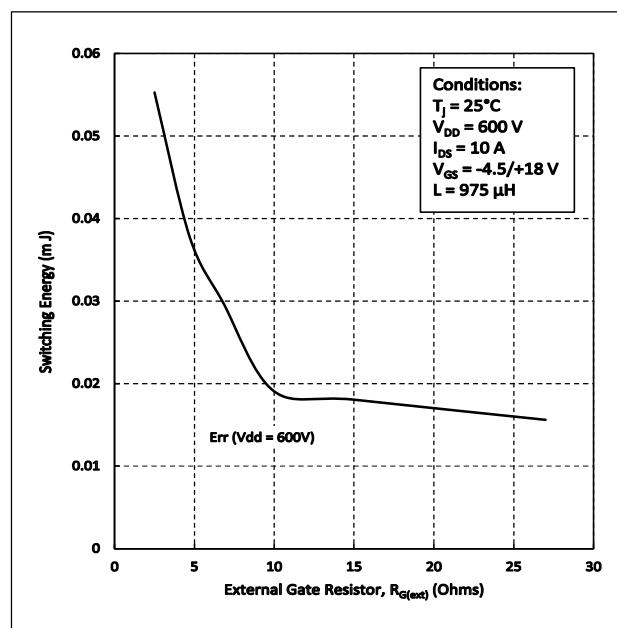


Figure 24. Reserve Recovery Energy vs. $R_{G(ext)}$

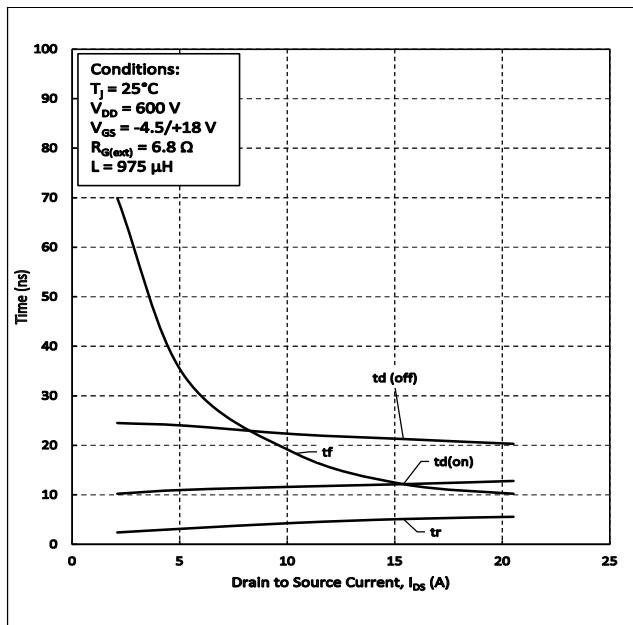


Figure 25. Switching Times vs. Drain Current

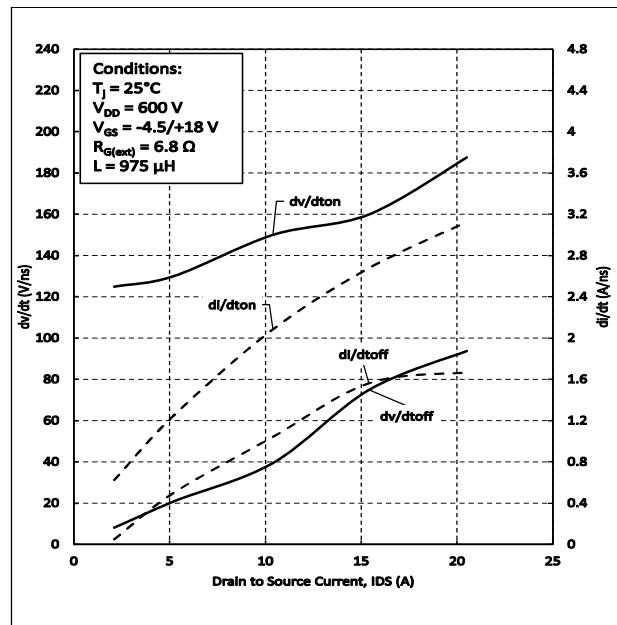


Figure 26. dv/dt and di/dt vs. Source Current

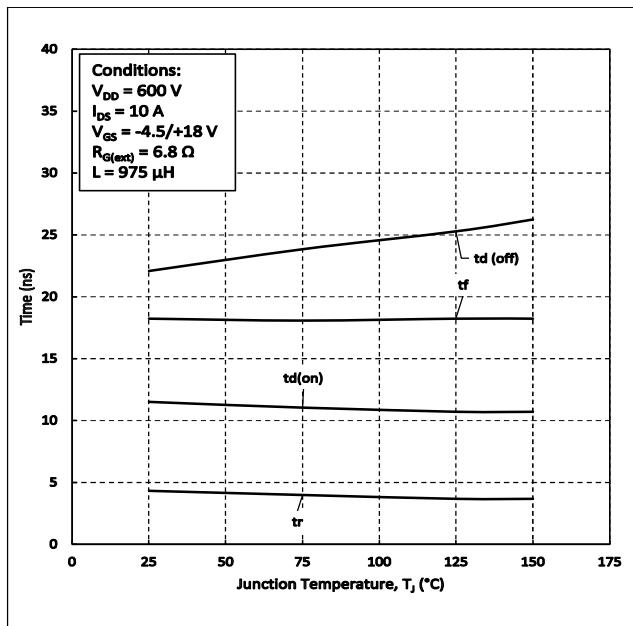


Figure 27. Switching Times vs. Temperature

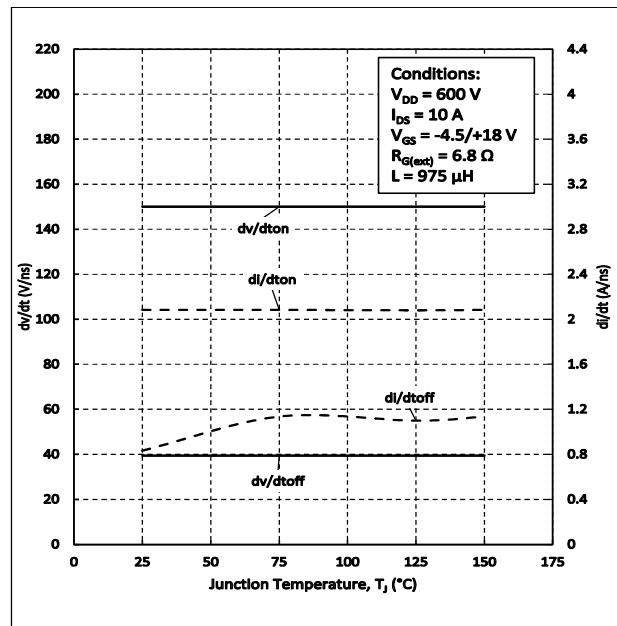


Figure 28. dv/dt and di/dt vs. Temperature

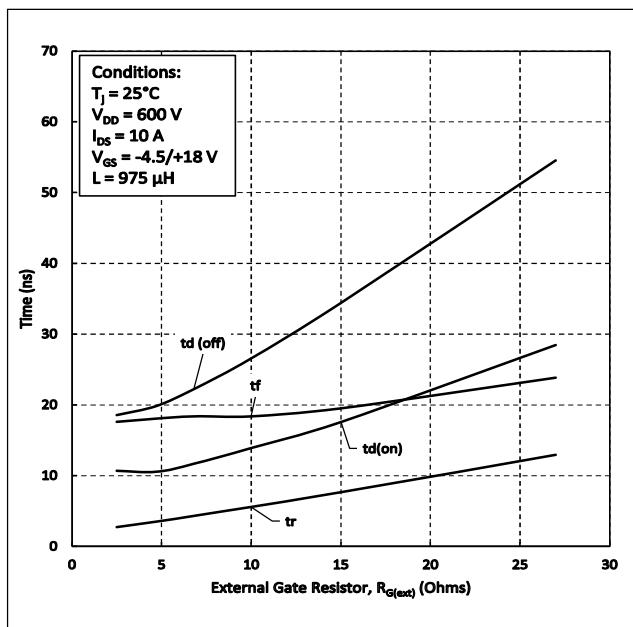
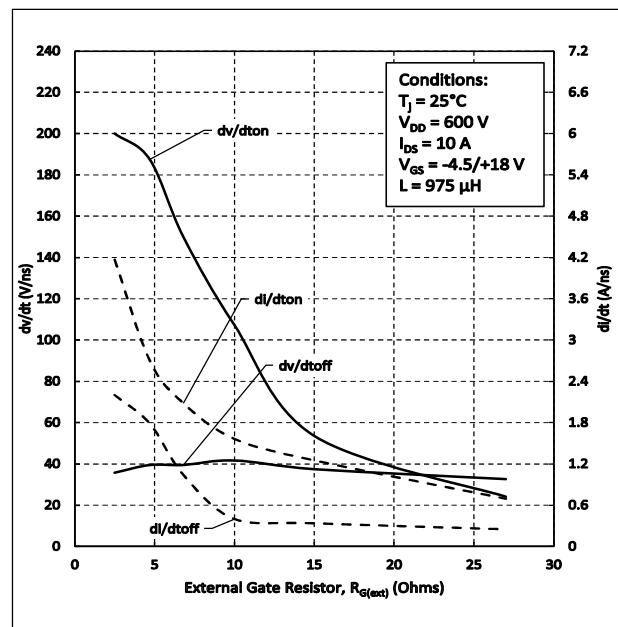
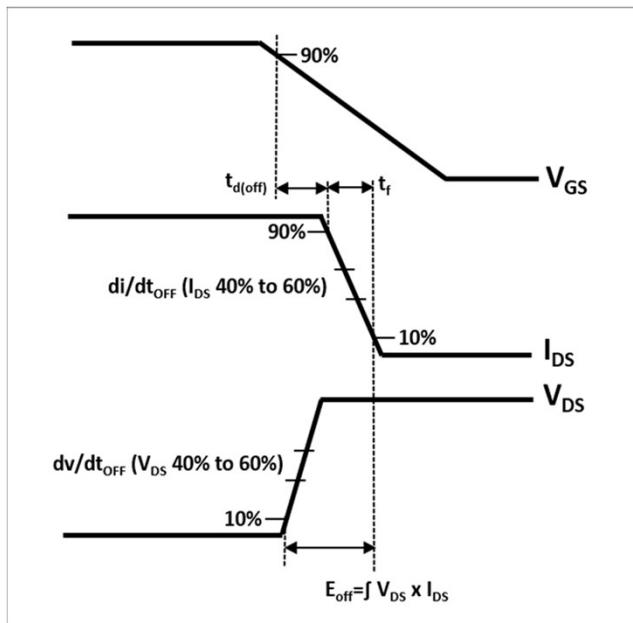
Figure 29. Switching Times vs. $R_{G(\text{ext})}$ Figure 30. dv/dt and di/dt vs. $R_{G(\text{ext})}$ 

Figure 31. Turn-off Transient Definitions

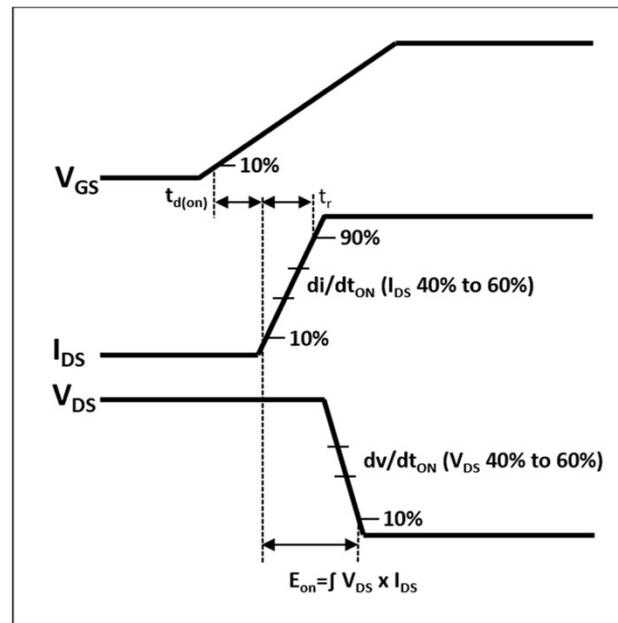


Figure 32. Turn-on Transient Definitions


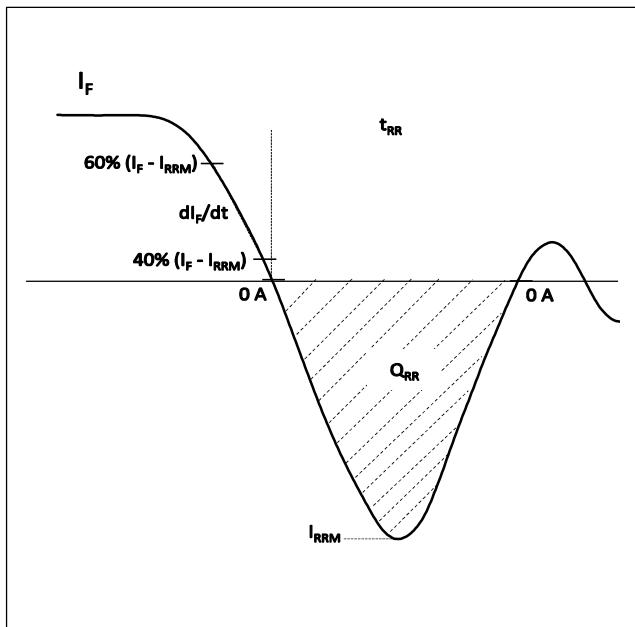


Figure 33. Reverse Recovery Definitions


QSiC™ 1200V SiC Six-Pack Module

GCMX080A120B2T1P

Pinout and Circuit Diagram

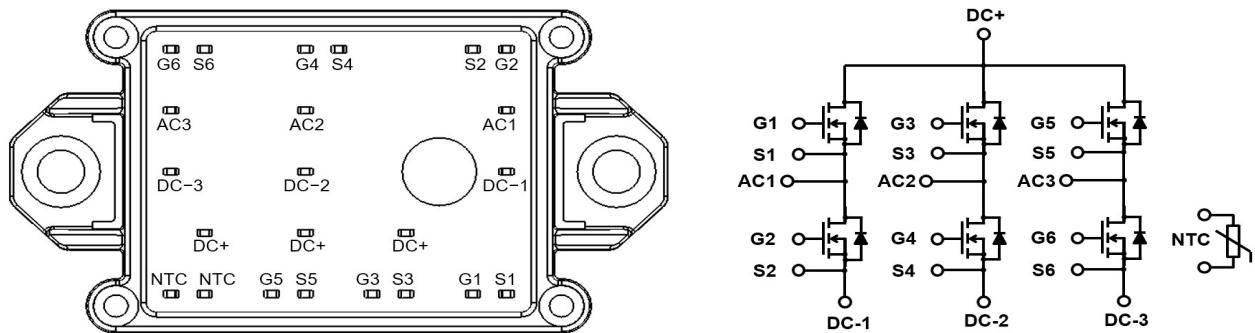

Package Dimensions (mm) for B2T1

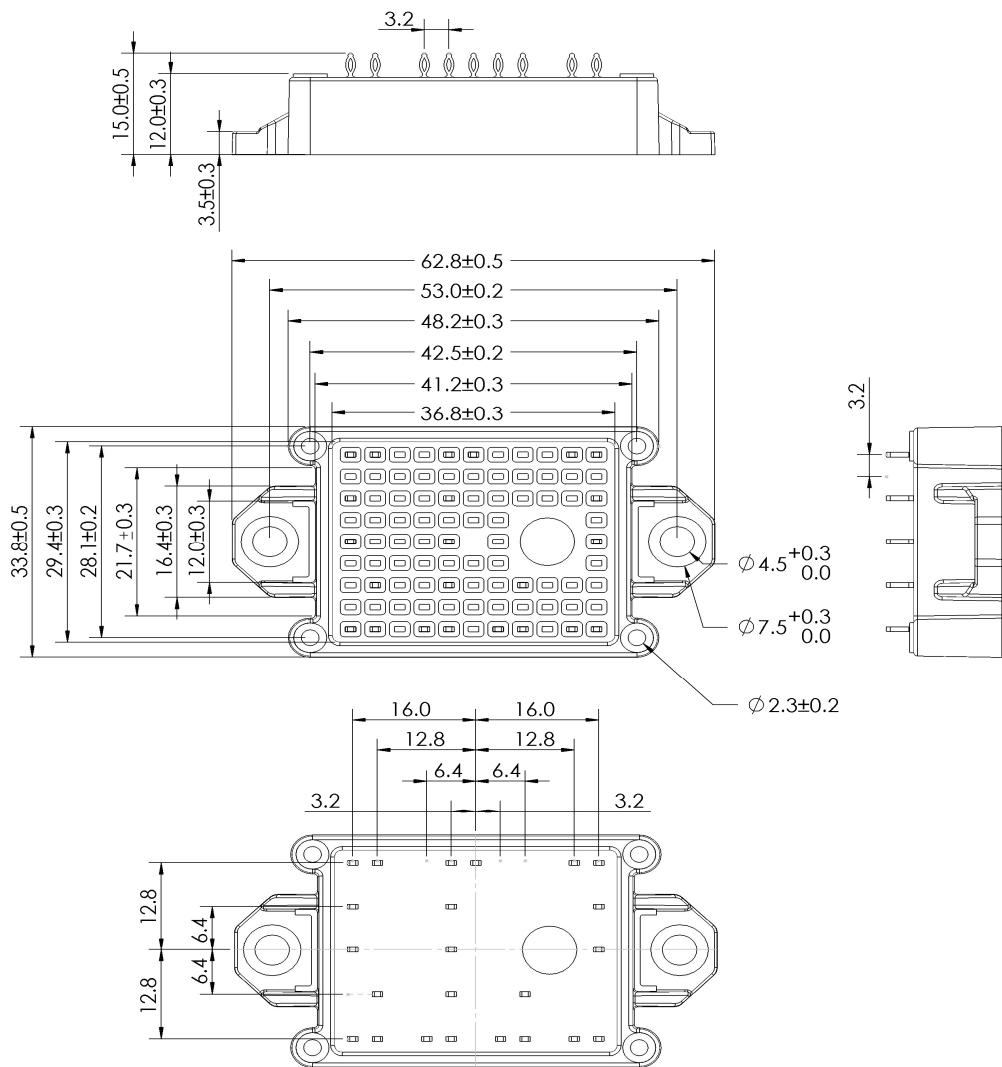

Revision History		
Date	Revision	Notes
1/31/2025	0.1	Preliminary release
2/25/2025	1.0	Initial release

Notes

RoHS Compliance

The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2011/65/EC (RoHS2), as implemented March, 2013. RoHS Declarations for this product can be obtained from the Product Documentation sections of www.SemiQ.com.

REACH Compliance

REACH substances of high concern (SVHC) information is available for this product. Since the European Chemicals Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, please contact our office at SemiQ Headquarters in Lake Forest, California to insure you get the most up-to-date REACH SVHC Declaration. REACH banned substance information (REACH Article 67) is also available upon request. SemiQ Inc., reserves the right to make changes to the product specifications and data in this document without notice. SemiQ products are sold pursuant to SemiQ's terms and conditions of sale in place at the time of order acknowledgement.

This product has not been designed or tested for use in, and is not intended for use in, applications implanted into the human body nor in applications in which failure of the product could lead to death, personal injury or property damage, including but not limited to equipment used in the operation of nuclear facilities, life-support machines, cardiac defibrillators or similar emergency medical equipment, aircraft navigation or communication or control systems, or air traffic control.

SemiQ makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SemiQ assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using SemiQ products.

To obtain additional technical information or to place an order for this product, please contact us. The information in this datasheet is provided by SemiQ.