
RFM
A BRAND OF AKOUSTIS

RoHS compliant

RO3164A-1

868.35 MHz SAW Resonator

- ***Designed for European 868.35 MHz SRD Transmitters***
- ***Very Low Series Resistance***
- ***Quartz Stability***
- ***Surface-mount Ceramic Case***
- ***Complies with Directive 2002/95/EC (RoHS)***
- ***Tape and Reel Standard per ANSI/EIA-481***
- ***Moisture Sensitivity Level: 1***
- ***AEC-Q200 Qualified***



SM5035-4

The RO3164A -1 is a one-port surface-acoustic-wave (SAW) resonator packaged in a surface-mount ceramic case. It provides reliable, fundamental-mode quartz frequency stabilization of fixed-frequency transmitters operating at 868.35 MHz. The RO3164A is designed specifically for remote control and wireless security SRD transmitters operating under ETSI EN 300 220-2.

Absolute Maximum Ratings

Rating	Value	Units
CW RF Power Dissipation	+5	dBm
DC Voltage Between Terminals	±30	VDC
Case Temperature	-40 to +85	°C
Soldering Temperature, 10 seconds / 5 cycles maximum	260	°C

Electrical Characteristics

Characteristic		Sym	Notes	Minimum	Typical		Units
Frequency, +25 °C		f_C		868.200		868.500	MHz
Tolerance from 868.35 MHz		Δf_C				±150	kHz
Insertion Loss		IL			1.3	2.0	dB
Quality Factor	Unloaded Q	Q_U			6600		
	50 Ω Loaded Q	Q_L			800		
Temperature Stability	Turnover Temperature	T_O		10	25	40	°C
	Turnover Frequency	f_O			f_C		kHz
	Frequency Temperature Coefficient	FTC			0.032		ppm/°C^2
Frequency Aging	Absolute Value during the First Year	|fA|			<±10		ppm/yr
DC Insulation Resistance between Any Two Terminals				1.0			MΩ
RF Equivalent RLC Model	Motional Resistance	R_M			13.8		Ω
	Motional Inductance	L_M			16.8		μH
	Motional Capacitance	C_M			2.0		fF
	Shunt Static Capacitance	C_O			1.8		pF
Test Fixture Shunt Inductance		L_{TEST}			18.3		nH
Lid Symbolization (YY = Year, WW = Week, S = Shift)		780, YYWWS					

CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.


NOTES:

1. The design, manufacturing process, and specifications of this device are subject to change.
2. US or International patents may apply.
3. RoHS compliant from the first date of manufacture.

©2010-2015 by RFM Integrated Device, Inc.


Electrical Connections


The SAW resonator is bidirectional and may be installed with either orientation. The two terminals are interchangeable and unnumbered. The callout NC indicates no internal connection. The NC pads assist with mechanical positioning and stability. External grounding of the NC pads is recommended to help reduce parasitic capacitance in the circuit.



Typical Test Circuit

The test circuit inductor, L_{TEST}, is tuned to resonate with the static capacitance, C_O, at F_C.

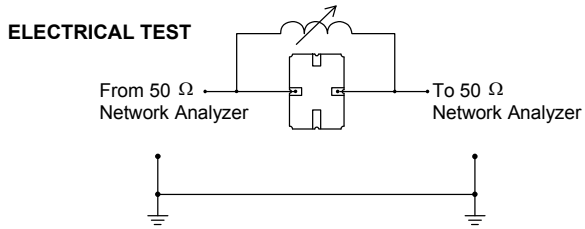


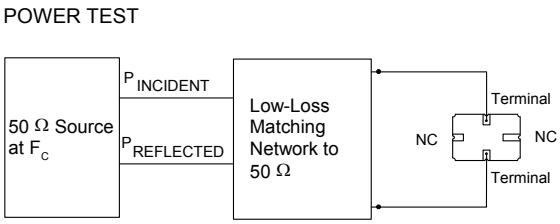


CW RF Power Dissipation = $P_{INCIDENT} - P_{REFLECTED}$

Typical Application Circuits


Typical Low-Power Transmitter Application

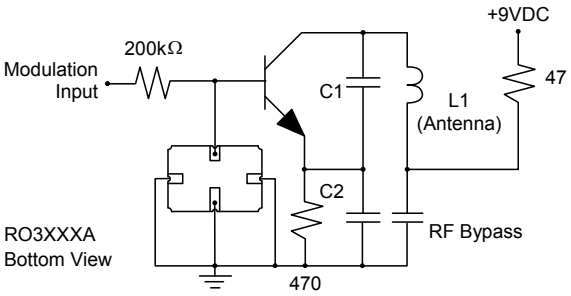

Typical Local Oscillator Applications

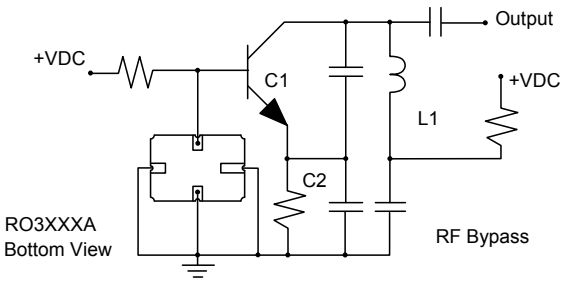


Equivalent RLC Model





Temperature Characteristics

The curve shown on the right accounts for resonator contribution only and does not include LC component temperature contributions.

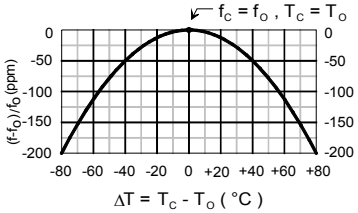

Case

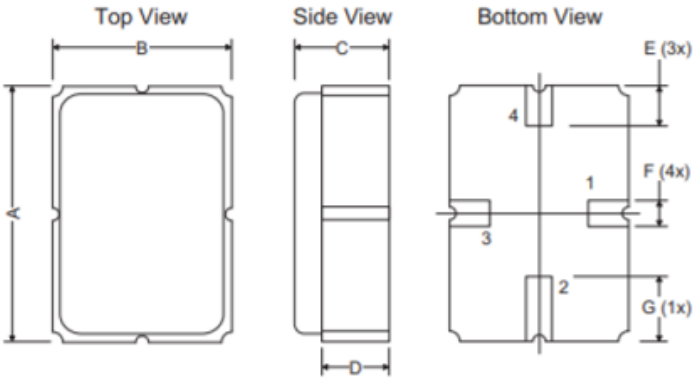




PCB Footprint

Dimensions	Millimeters				Inches	
	Min	Nom	Max	Min	Nom	Max
A	4.87	5.00	5.13	0.191	0.196	0.201
B	3.37	3.50	3.63	0.132	0.137	0.142
C	1.45	1.53	1.60	0.057	0.060	0.062
D	1.35	1.43	1.50	0.040	0.057	0.059
E	0.67	0.80	0.93	0.026	0.031	0.036
F	0.37	0.50	0.63	0.014	0.019	0.024
G	1.07	1.20	1.33	0.042	0.047	0.052

©2010-2015 by RFM Integrated Device, Inc.

Recommended Reflow Profile

1. Preheating shall be fixed at 150~180ºC for 60~90 seconds.
2. Ascending time to preheating temperature 150ºC shall be 30 seconds min.
3. Heating shall be fixed at 220ºC for 50~80 seconds and at 260ºC +0/-5ºC peak (10 seconds).
4. Time: 5 times maximum.

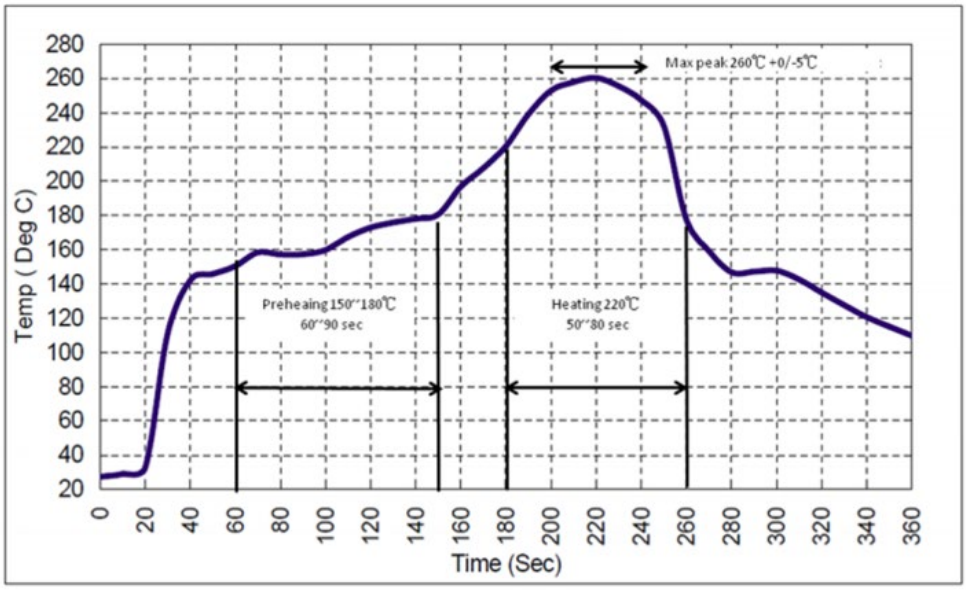

©2010-2015 by RFM Integrated Device, Inc.