

# SACB-4/ 4-L-SC SCO P - Distributor box

1452987

<https://www.phoenixcontact.com/us/products/1452987>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Distributor box, application: Standard, connection method: M12 socket Plastic, number of slots: 4, number of positions: 4, coding: A, slot assignment: single, status display: yes, PNP; master cable connection: Spring-cage connection 180°, shielding: no

## Your advantages

- Safety in the field, thanks to molded housing and high degree of protection
- Convenient: increased machine availability thanks to quick and easy diagnostics
- Save time, thanks to installation with SPEEDCON fast locking system
- Flexible: distributor box with connector hood for on-site assembly

## Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 1452987       |
| Packing unit                         | 1 pc          |
| Minimum order quantity               | 1 pc          |
| Sales key                            | BF41          |
| Product key                          | AF3CBC        |
| GTIN                                 | 4046356553605 |
| Weight per piece (including packing) | 156.5 g       |
| Weight per piece (excluding packing) | 156.8 g       |
| Customs tariff number                | 85366990      |
| Country of origin                    | DE            |

# SACB-4/ 4-L-SC SCO P - Distributor box

1452987

<https://www.phoenixcontact.com/us/products/1452987>



## Technical data

### Notes

|                     |   |
|---------------------|---|
| Assembly note       | When connecting the signal lines to the black PCB terminal blocks, please use a 0.4 x 2.0 mm screwdriver. The black PCB terminal blocks only require a minimal amount of operating force. Screwdriver: Szs 0,4X2,0 - 1205202 Using larger screwdrivers or excessive force may damage the PCB terminal blocks. When using ferrules, the wires can be inserted straight into the PCB terminal blocks without opening the clamping area. |
| Recommendation      | Item 1412058 SACB-4/ 8-L-PT SCO P is a version with the same connection cross section for signals and energy supply from 0.2 mm <sup>2</sup> to 1 mm <sup>2</sup> . This sensor/actuator box with double slot assignment also features a master cable connection with Push-in connection terminal blocks.   |
| Assembly note       | <b>NOTE:</b> Observe the permissible bending radii when routing cables, since the degree of protection may be at risk if the bending forces are too high. Reduce mechanical loads upstream of the connector, e.g., by using cable ties.   |
| Note on application | Unused slots are to be sealed off prior to commissioning. Suitable sealing elements are to be found under "Accessories".  |

### Product properties

|                     |                 |
|---------------------|-----------------|
| Product type        | Distributor box |
| Application         | Standard        |
| Number of positions | 4               |
| Number of slots     | 4               |
| Coding              | A               |
| LED                 | yes             |

### System properties

|                        |                |
|------------------------|----------------|
| Local diagnostics      |                |
| Monitored function     | Supply voltage |
| Optical representation | Green LED      |

### Electrical properties

|   |                               |
|---|-------------------------------|
| Max. operating voltage U <sub>max</sub> | 30 V DC                       |
| Local diagnostics                       | Supply voltage Green LED      |
|   | Status display I/O Yellow LED |
| Nominal voltage U <sub>N</sub>          | 24 V DC                       |
| Rated current, total                    | 12 A                          |
| Max. current carrying capacity per path | 2 A                           |
| Current carrying capacity per slot      | 4 A                           |

### Connection data

# SACB-4/ 4-L-SC SCO P - Distributor box



1452987

<https://www.phoenixcontact.com/us/products/1452987>

## Conductor connection

|  |   |
|--|---|
| Sensor/actuator connection system                          | M12 socket                                  |
| Conductor cross section Flexible signal line               | 0.2 mm <sup>2</sup> ... 0.5 mm <sup>2</sup> |
| Conductor cross section Flexible power supply              | 0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> |
| Connection cross section AWG Flexible signal line          | 24 ... 20                                   |
| Connection cross section AWG Flexible power supply         | 24 ... 16                                   |
| Stripping length Signal line                               | 6 mm  |
| Stripping length Power supply                              | 10 mm                                       |
| Stripping length of the sheath                             | 50 mm (Master cable)                        |
| Tightening torque, cover screw                             | 1 Nm  |
| Tightening torque slot sensor/actuator cable               | 0.4 Nm                                      |
| Tightening torque of mounting screw for fixing the housing | 0.5 Nm                                      |
| Tightening torque, union nut                               | 2.5 Nm                                      |

## Connection assignment

|  |                       |
|--|-----------------------|
| Slot/position = Wire color or connection | 1 / 4 (A) = WH        |
|  | 2 / 4 (A) = GN        |
|  | 3 / 4 (A) = YE        |
|  | 4 / 4 (A) = GY        |
|  | 1-4 / 1 (+ 24 V) = BN |
|  | 1-4 / 3 (0 V) = BU    |
|  | 1-4 / 5 (PE) = GNYE   |

## Signaling

|                        |     |
|------------------------|-----|
| Status display present | yes |
|------------------------|-----|

## Dimensions

|                     |        |
|---------------------|--------|
| Dimensional drawing |        |
| Width               | 54 mm  |
| Height              | 43 mm  |
| Length              | 117 mm |

## Material specifications

|  |     |
|--|-----|
| Material Threaded sleeve               | PBT |
| Material Housing                       | PBT |
| Material Molding compound              | PUR |
| Flammability rating according to UL 94 | V0  |

# SACB-4/ 4-L-SC SCO P - Distributor box

1452987

<https://www.phoenixcontact.com/us/products/1452987>



|                          |             |
|--------------------------|-------------|
| Seal material O-ring     | NBR         |
| Contact material         | Cu alloy    |
| Contact surface material | gold-plated |
| Contact carrier material | PA          |

## Cable/line

|                         |                        |
|-------------------------|------------------------|
| External cable diameter | 7 mm ... 12 mm         |
| Connection method       | Spring-cage connection |

## Environmental and real-life conditions

### Ambient conditions

|                                 |                  |
|---------------------------------|------------------|
| Degree of protection            | IP65             |
|                                 | IP67             |
| Ambient temperature (operation) | -25 °C ... 80 °C |

## Standards and regulations

|                          |                 |
|--------------------------|-----------------|
| Standard designation     | M12 connector   |
| Standards/specifications | IEC 61076-2-101 |

# SACB-4/ 4-L-SC SCO P - Distributor box




1452987

<https://www.phoenixcontact.com/us/products/1452987>

## Drawings

Dimensional drawing

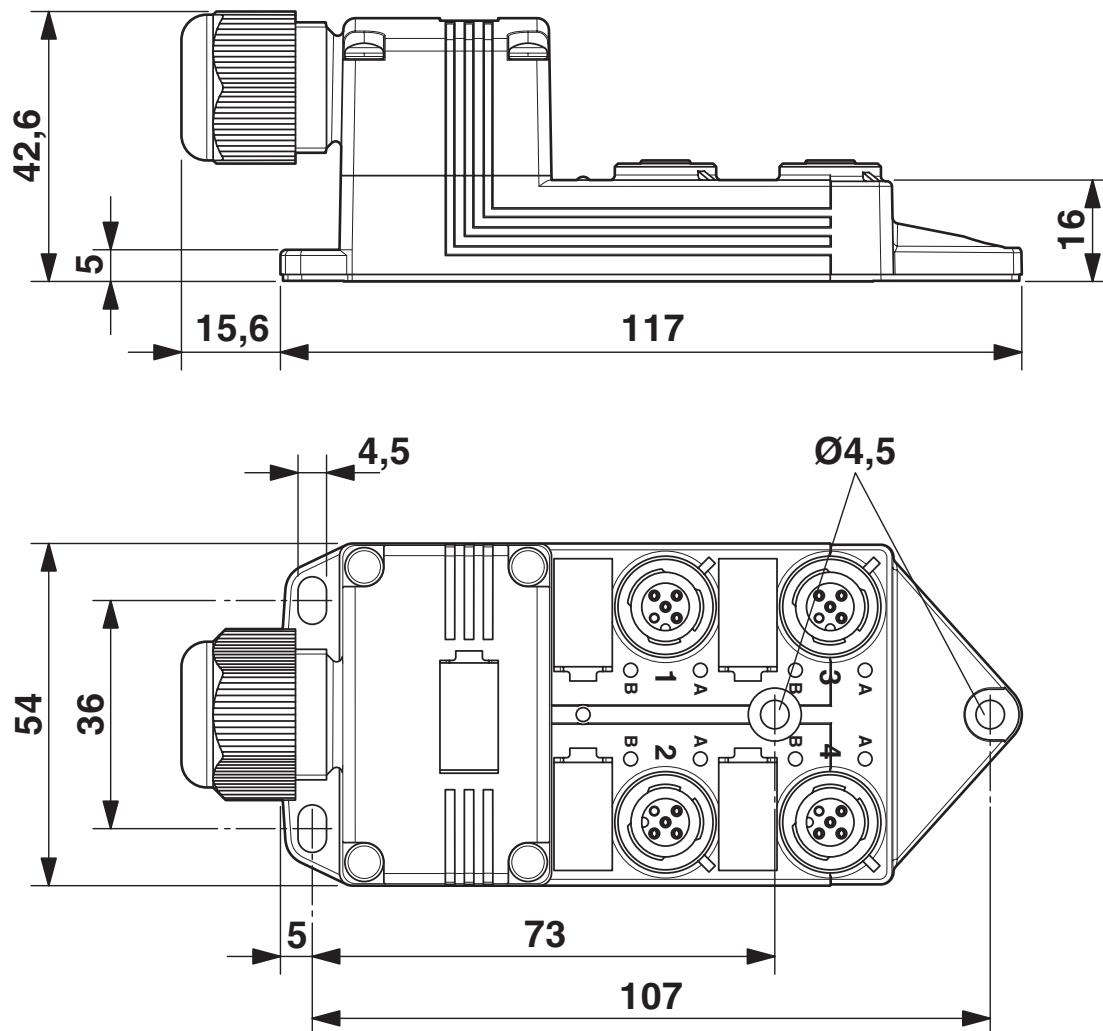


# SACB-4/ 4-L-SC SCO P - Distributor box

1452987

<https://www.phoenixcontact.com/us/products/1452987>




Schematic diagram

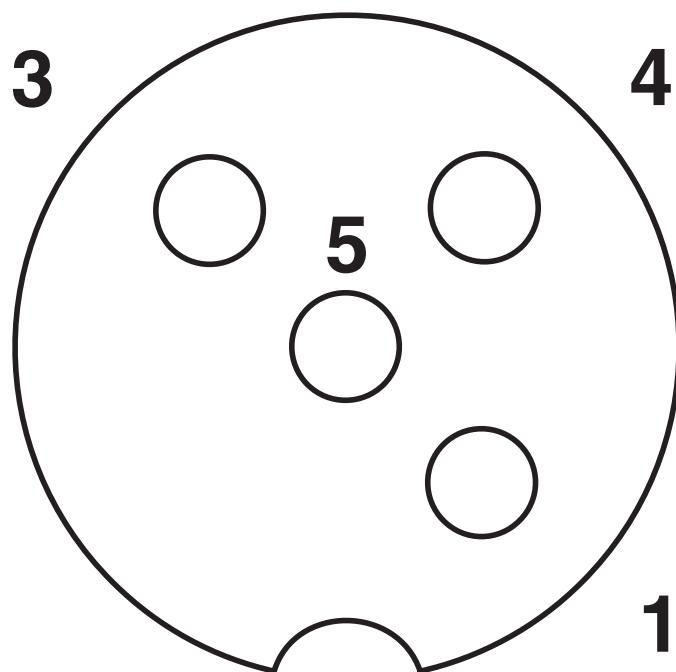

M12 slot, socket, 4-pos.

Circuit diagram

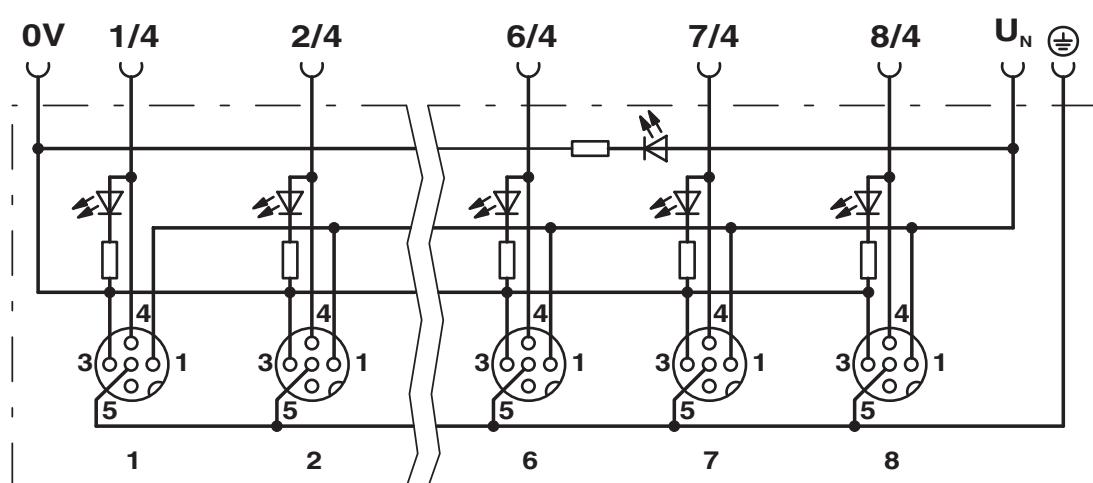

# SACB-4/ 4-L-SC SCO P - Distributor box

1452987

<https://www.phoenixcontact.com/us/products/1452987>



## Approvals

ⓘ To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1452987>

| cUL Recognized |      | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $mm^2$ |
|----------------|------|-----------------------|-----------------------|-------------------|----------------------|
| keine          |      |                       |                       | -                 | -                    |
|                | 24 V |                       | -                     | -                 | -                    |

| UL Recognized |      | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $mm^2$ |
|---------------|------|-----------------------|-----------------------|-------------------|----------------------|
| keine         |      |                       |                       | -                 | -                    |
| Signal        | -    | 2 A                   | -                     | -                 | -                    |
|               | 24 V | 4 A                   | -                     | -                 | -                    |

# SACB-4/ 4-L-SC SCO P - Distributor box

1452987

<https://www.phoenixcontact.com/us/products/1452987>



## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-13.0 | 27440111 |
| ECLASS-15.0 | 27440111 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC003558 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 31251500 |
|-------------|----------|

# SACB-4/ 4-L-SC SCO P - Distributor box

1452987

<https://www.phoenixcontact.com/us/products/1452987>



## Environmental product compliance

### EU RoHS

|   |                    |
|---|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--------------------|

### China RoHS

|  |  |
|--|--|
| Environment friendly use period (EFUP) | EFUP-E                                   |
|  | No hazardous substances above the limits |

### EU REACH SVHC

|                                     |                            |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

### Phoenix Contact USA

586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)