

SM-5ES1N8AYW00 - Device connector front mounting with knurled nut



1607532

<https://www.phoenixcontact.com/us/products/1607532>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector front mounting with knurled nut, angled fixed, Screw locking mechanism, M40, number of positions: 2+3+PE, contact connection type: Socket, Axial O-ring, shielded: yes, flange dimensions: 40 mm x 40 mm, number of positions: 6, connection method: Crimp connection, series: SM, this item is expected to be lead-free from Q3 2026 in accordance with RoHS II without exception 6c (Pb < 0.1%), a lead-free alternative is possible on request in advance

Commercial data

Item number	1607532
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Sales key	AB32
Product key	ABRBGG
GTIN	4046356271509
Weight per piece (including packing)	593.3 g
Weight per piece (excluding packing)	534.431 g
Customs tariff number	85366990
Country of origin	DE

SM-5ES1N8AYW00 - Device connector front mounting with knurled nut



1607532

<https://www.phoenixcontact.com/us/products/1607532>

Technical data

Notes

Order information:	Order crimp contacts 2 x Ø 2 mm, 4 x Ø 3.6 mm separately
Safety note	
Safety note	<p>WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.</p> <ul style="list-style-type: none">• WARNING: Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible.• WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.• The products are suitable for applications in plant, controller, and electrical device engineering.• When operating the connectors in outdoor applications, they must be separately protected against environmental influences.• Assembled products may not be manipulated or improperly opened.• Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products).• When using the product in direct connection with third-party manufacturers, the user is responsible.• For operating voltages > 50 V AC, conductive connector housings must be grounded• Ensure that the protective or functional ground has been properly connected.• VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector• Only use tools recommended by Phoenix Contact• The installation notes/Design In documents online on the download page at phoenixcontact.com/products must be observed for this product.• Operate the connector only when it is fully plugged in and interlocked.• Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.• Observe the minimum bending radius of the cable. Lay the cable without twisting it.• The connector warms up in normal operation. Depending on the

SM-5ES1N8AYW00 - Device connector front mounting with knurled nut



1607532

<https://www.phoenixcontact.com/us/products/1607532>

ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).

Mounting

Mounting type	Front mounting/square flange (4x Ø 4,2 mm)
---------------	--

Product properties

Product type	Circular connectors (device side)
Series	SM
Application	Power
Number of positions	6
Connection profile	2+3+PE
Shielded	yes
Coding	N
Thread type	M40

Dimensions

Housing	
Flange dimensions	40 mm x 40 mm

Material specifications

Material Housing	GD-Zn
Material Rotating parts	CuZn
Material Housing surface	Ni
Material Insulating body	PA 6.6
Material Seal	FPM (O-ring)

Electrical properties

Contact: Contact group 1	
Contact diameter	3.6 mm
Nominal current I_N	70 A
Nominal voltage U_N	630 V
Oversupply category	III
Degree of pollution	3
Rated surge voltage	6 kV

Contact: Contact group 2	
Contact diameter	2 mm
Nominal current I_N	30 A
Nominal voltage U_N	250 V
Oversupply category	III
Degree of pollution	3

SM-5ES1N8AYW00 - Device connector front mounting with knurled nut



1607532

<https://www.phoenixcontact.com/us/products/1607532>

Rated surge voltage	4 kV
---------------------	------

Connection data

Conductor connection

Connection method	Crimp connection
Contact connection type	Socket

Connector

Type	angled fixed
------	--------------

Connection 1

Head design	Socket
-------------	--------

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP67
Ambient temperature (operation)	-40 °C ... 125 °C
Altitude	3000 m

SM-5ES1N8AYW00 - Device connector front mounting with knurled nut




1607532

<https://www.phoenixcontact.com/us/products/1607532>

Drawings

Dimensional drawing

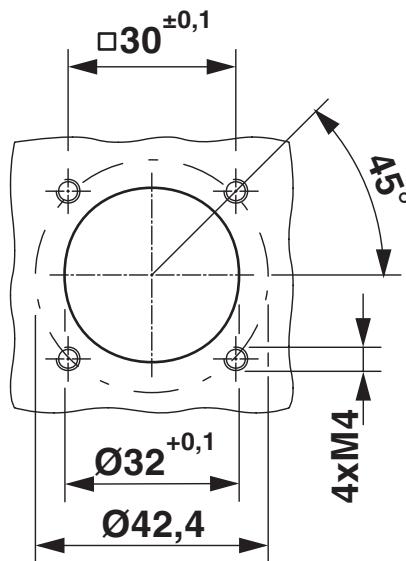

Installation dimensions


SM-5ES1N8AYW00 - Device connector front mounting with knurled nut



1607532

<https://www.phoenixcontact.com/us/products/1607532>

Dimensional drawing

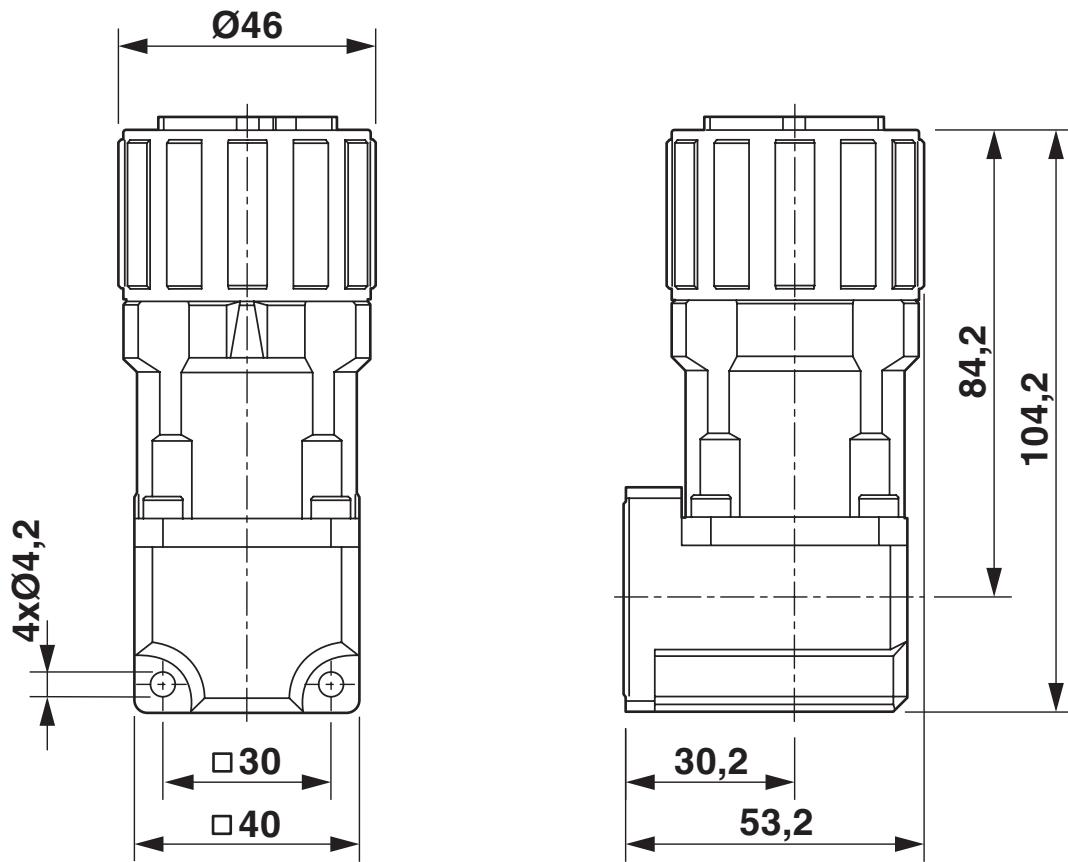

Dimensional drawing


SM-5ES1N8AYW00 - Device connector front mounting with knurled nut



1607532

<https://www.phoenixcontact.com/us/products/1607532>

Schematic diagram

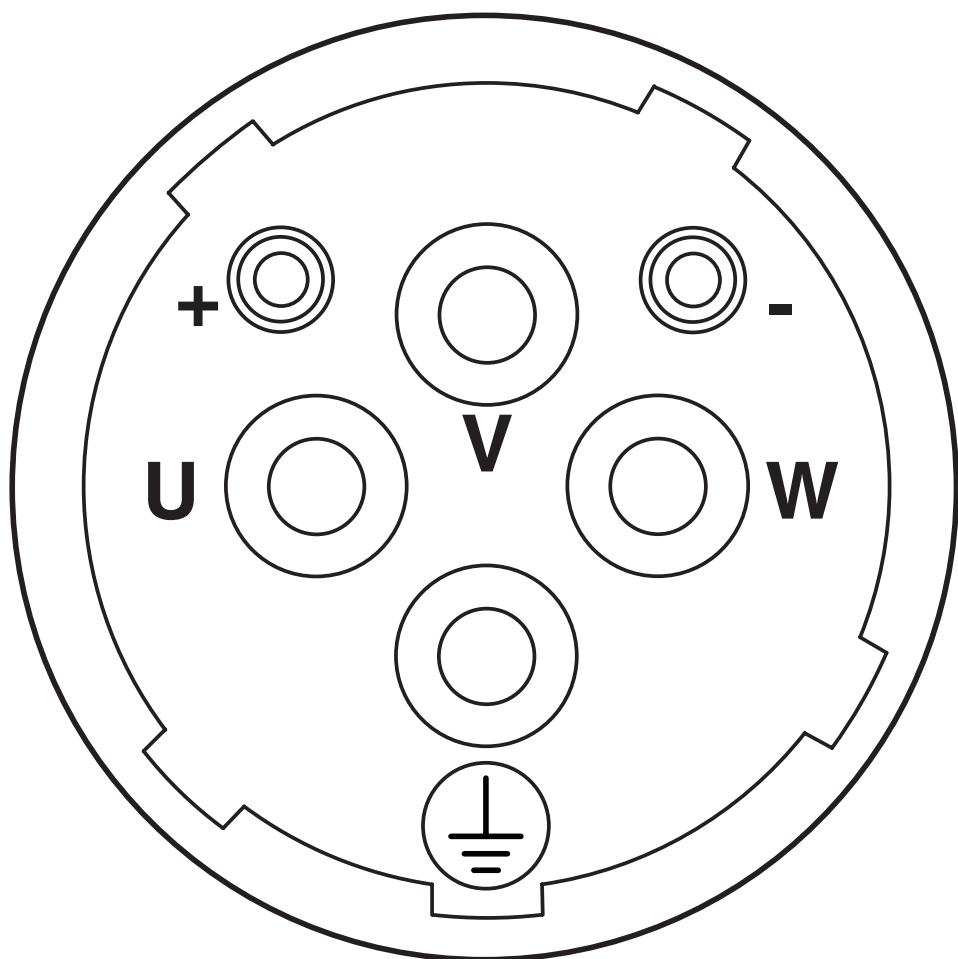

Connector pin assignment


SM-5ES1N8AYW00 - Device connector front mounting with knurled nut



1607532

<https://www.phoenixcontact.com/us/products/1607532>

Diagram

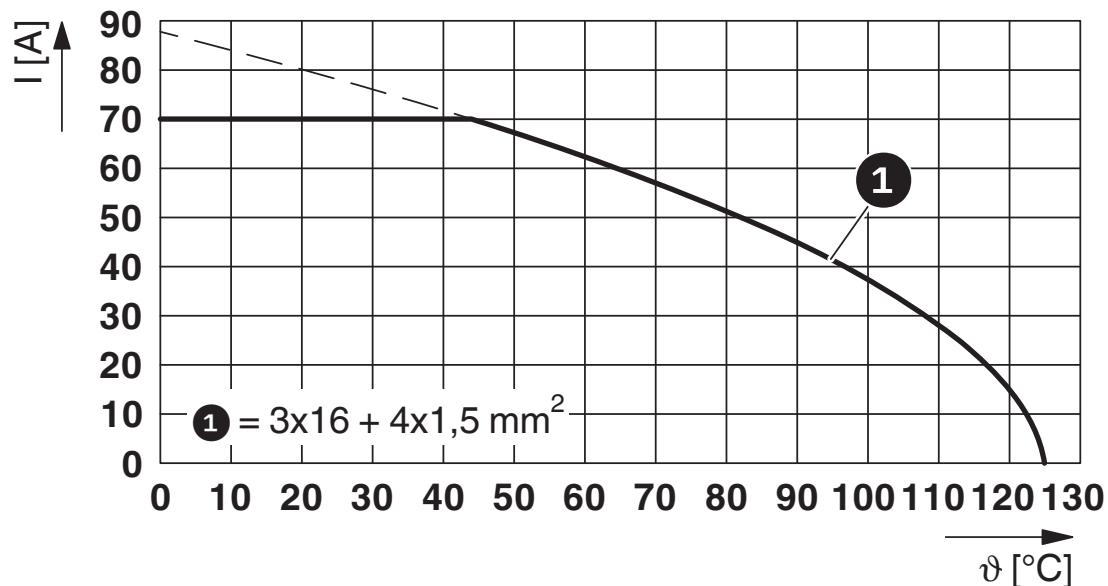

I = current strength, T = ambient temperature

SM-5ES1N8AYW00 - Device connector front mounting with knurled nut



1607532

<https://www.phoenixcontact.com/us/products/1607532>

Approvals

ⓘ To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1607532>

cUL Recognized				
Approval ID: E153698-20150903				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
keine				
Power	600 V	40 A	-	-
Signal	600 V	20 A	-	-

UL Recognized				
Approval ID: E153698-20150903				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
keine				
Power	600 V	65 A	-	-
Signal	600 V	30 A	-	-

SM-5ES1N8AYW00 - Device connector front mounting with knurled nut



1607532

<https://www.phoenixcontact.com/us/products/1607532>

Classifications

ECLASS

ECLASS-13.0	27440109
ECLASS-15.0	27440109

ETIM

ETIM 9.0	EC003569
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

SM-5ES1N8AYW00 - Device connector front mounting with knurled nut



1607532

<https://www.phoenixcontact.com/us/products/1607532>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

China RoHS

Environment friendly use period (EFUP)	EFUP-50 An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
--	--

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	baa6e21f-aa43-4b79-b589-2d12e4383f1b

Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com