

## C-SAVSIN-ADAC10M

Avaya/Nortel® AA1403018-E6 to Intel® XDACBL10MA Compatible TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Active Twinax, 10m)

### Features:

- Up to 10Gbps bi-directional data links
- Dual SFP Connectors
- Industry Standard small form pluggable
- Hot Pluggable
- Single Power Supply 3.3V
- Operating Temperature: 0 to 70 Celsius
- RoHS Compliant and Lead-Free



### Applications:

- 10G Ethernet
- 10G Fibre Channel

### Product Description

This Avaya/Nortel® AA1403018-E6 to Intel® XDACBL10MA dual OEM compatible 10GBase-CU SFP+ to SFP+ active TAA (Trade Agreements Act) compliant direct attach cable has a maximum reach of 10.0m (32.8ft). It is 100% Avaya/Nortel® to Intel® compatible and has been programmed, uniquely serialized, and data-traffic and application tested to ensure that it is compliant and functional. This direct attach cable will initialize and perform identically to Avaya/Nortel® and Intel®'s individual cables and is built to meet or exceed Avaya/Nortel® and Intel®'s specifications, and comply with MSA (Multi-Source Agreement) standards. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

ProLabs' transceivers are RoHS compliant and lead-free.

TAA refers to the Trade Agreements Act (19 U.S.C. & 2501-2581), which is intended to foster fair and open international trade. TAA requires that the U.S. Government may acquire only "U.S.-made or designated country end products.")



## General Specifications

Parameter	Symbol	Min	Typ.	Max.	Unit	Notes
<b>Data Rate</b>	DR		10.3125		Gbps	1
<b>Bit Error Rate</b>	BER			$10^{-12}$		
<b>Operating Case Temperature</b>	Tc	0		70	°C	2
<b>Storage Temperature</b>	Tstg	-40		85	°C	3
<b>Input Voltage</b>	Vcc	3.14	3.3	3.46	V	4
<b>Supply Current</b>	Icc		100	300	mA	4
<b>Cable Impedance</b>	Z	90	100	110	Ω	
<b>Product Weight</b>	GD		88		g/PCS	
<b>Cable Weight</b>	GC		42		G/M	
<b>Dust Cap Weight</b>	GS		0.80		g/PCS	
<b>Wire Gauge</b>			28		AWG	
<b>Tolerance Range</b>			8		±cm	

### Notes:

1. IEEE 802.3ae compatible.
2. Case temperature.
3. Ambient temperature.
4. For electrical power interface.



## Pin Descriptions

Pin	Symbol	Name/Description	Notes
1	VeeT	Transmitter ground. Common with receiver ground.	1
2	Tx_Fault	Transmitter Fault.	
3	Tx_Disable	Transmitter Disable. Laser output disabled on "high" or "open."	2
4	SDA	Data line for Serial ID.	3
5	SCL	Clock line for Serial ID.	3
6	MOD_ABS	Module absent. Grounded within the module.	3
7	RS0	No connection required.	
8	LOS	Loss of Signal. Logic 0 indicated normal operation.	4
9	RS1	No connection required.	
10	VeeR	Receiver ground. Common with transmitter ground.	1
11	VeeR	Receiver ground. Common with transmitter ground.	1
12	RD-	Receiver Inverted DATA out. AC coupled.	
13	RD+	Receiver NonInverted DATA out. AC coupled.	
14	VeeR	Receiver ground. Common with transmitter ground.	1
15	VccR	Receiver power supply.	
16	VccT	Transmitter power supply.	
17	VeeT	Transmitter ground. Common with receiver ground.	1
18	TD+	Transmitter Non-Inverted DATA in. AC coupled.	
19	TD-	Transmitter Inverted DATA in. AC coupled.	
20	VeeT	Transmitter ground. Common with receiver ground.	1


### Notes:

1. Circuit ground is isolated from chassis ground.
2. Disabled:  $T_{dis} > 2V$  or open, Enabled  $T_{dis} < 0.8V$ .
3. Should be pulled up with  $4.7k\Omega$ - $10k\Omega$  on host board to a voltage between 2V and 3.6V.
4. LOS is open collector output.


## Electrical Pad Layout

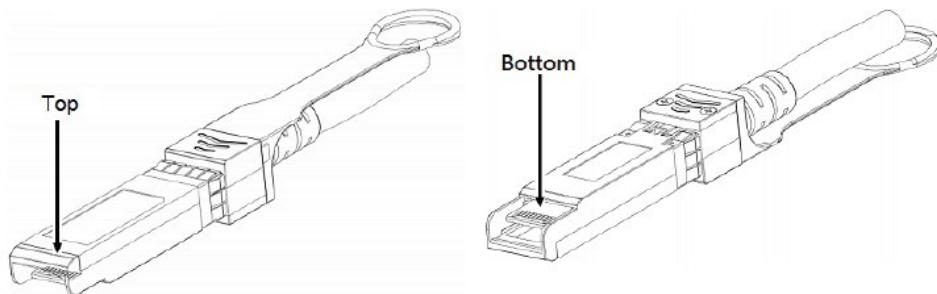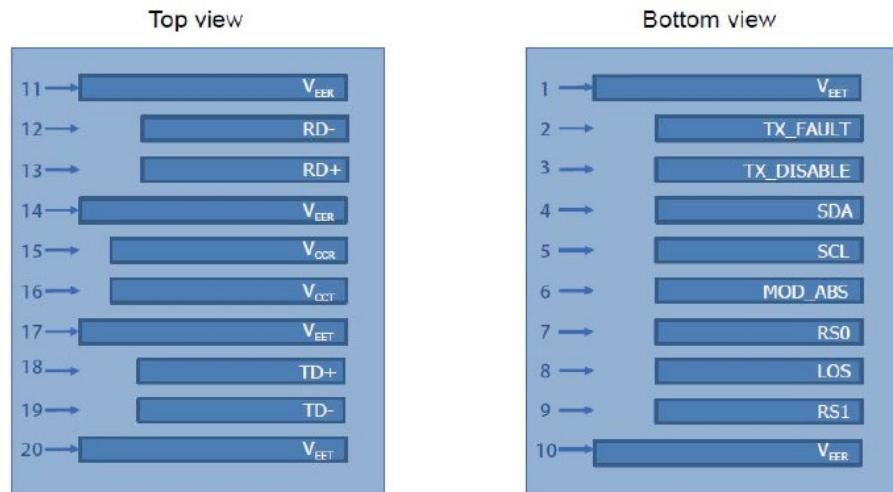

## Block Diagram

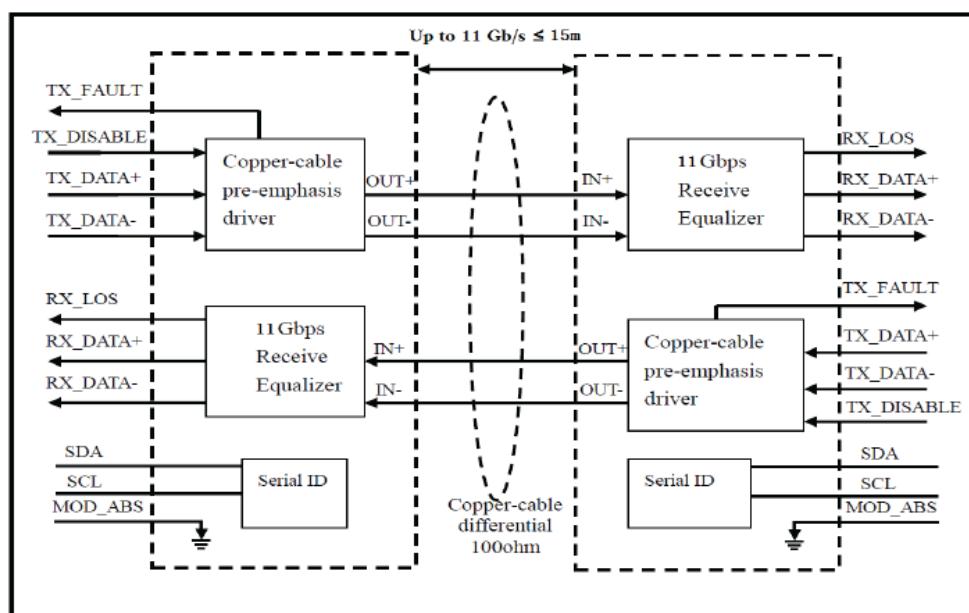

## Mechanical Specifications

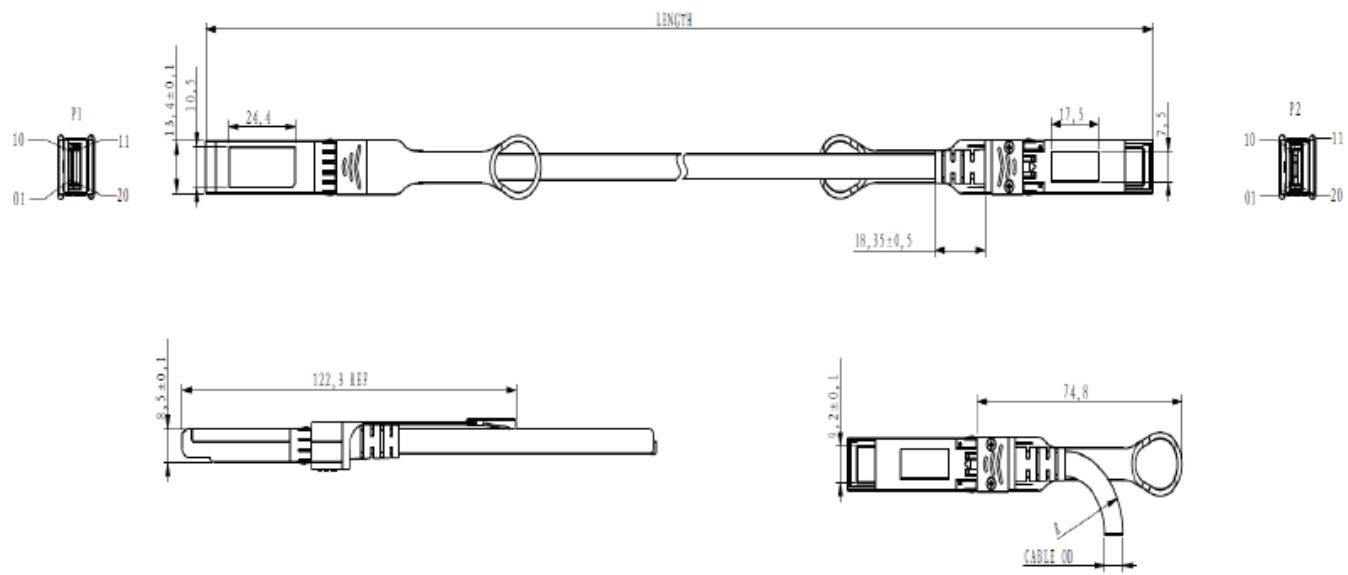

## About ProLabs

Our extensive experience comes as standard. For over 20 years ProLabs has delivered optical connectivity solutions that give our customers freedom and choice through our ability to provide seamless interoperability. At the heart of our company is the ability to provide state-of-the-art optical transport and connectivity solutions that are compatible with more than 100 optical switching and transport platforms.

## A Complete Portfolio of Network Solutions

ProLabs is focused on innovations in optical transport and connectivity. The combination of our knowledge of optics and networking equipment enables ProLabs to be your single source for optical transport and connectivity solutions from 100Mb to 1.6T while providing innovative solutions that increase network efficiency. We provide the optical connectivity expertise that is compatible with and enhances your switching and transport equipment.

## The Trusted Partner

Customer service is our number one value. ProLabs has invested in people, labs and manufacturing capacity to ensure compatible products, and immediate answers to your questions. With Engineering and Manufacturing offices in the U.K. and U.S. augmented by field offices throughout the U.S., U.K. and Asia, ProLabs is able to be our customers best advocate 24 hours a day.



## Contact Information

### ProLabs US

Email: [sales@prolabs.com](mailto:sales@prolabs.com)  
Telephone: 952-852-0252

### ProLabs UK

Email: [salesupport@prolabs.com](mailto:salesupport@prolabs.com)  
Telephone: +44 1285 719 600