


QSFP-100G-LR-S-CW31-C

Cisco® QSFP-100G-LR-S-CW31 Compatible TAA 100GBase-CWDM QSFP28 Transceiver Single Lambda (SMF, 1310nm, 10km w/FEC, LC, DOM)

Features:

- Supports 100Gbps
- 100G Lambda MSA 100G-LR Specification Compliant
- Single 3.3V Power Supply
- Power Dissipation < 4.5W
- Up to 10km over SMF with FEC
- QSFP28 MSA Compliant
- SFF-8636 Rev 2.10a Compliant
- 4x25G Electrical Interface
- LC Duplex Connector
- Operating Case Temperature: 0C to 70C
- I2C Interface with Integrated Digital Diagnostic Monitoring
- RoHS compliant

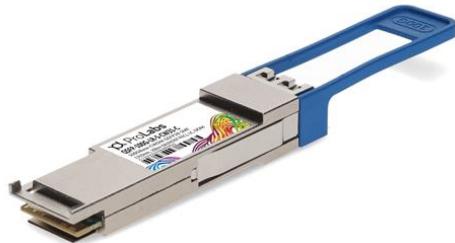

Applications:

- 100GBase Ethernet over CWDM
- Access, Metro and Enterprise

Product Description

This Cisco® QSFP-100G-LR-S-CW31 compatible QSFP28 transceiver provides 100GBase-CWDM throughput up to 10km w/host FEC over single-mode fiber (SMF) using a single lambda wavelength of 1310nm via an LC connector. It can operate at temperatures between 0 and 70C. Our transceiver is built to meet or exceed OEM specifications and is guaranteed to be 100% compatible with Cisco®. It has been programmed, uniquely serialized, and tested for data-traffic and application to ensure that it will initialize and perform identically. All of our transceivers comply with Multi-Source Agreement (MSA) standards to provide seamless network integration. Additional product features include Digital Optical Monitoring (DOM) support which allows access to real-time operating parameters. This transceiver is Trade Agreements Act (TAA) compliant. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

ProLabs' transceivers are RoHS compliant and lead-free.

TAA refers to the Trade Agreements Act (19 U.S.C. & 2501-2581), which is intended to foster fair and open international trade. TAA requires that the U.S. Government may acquire only "U.S.-made or designated country end products.")



CWDM Available Wavelengths

Wavelengths	Min.	Typ.	Max.
27	1264.5	1271	1277.5
29	1284.5	1291	1297.5
31	1304.5	1311	1317.5
33	1324.5	1331	1337.5

Absolute Maximum Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit
Maximum Supply Voltage	Vcc	-0.5		4.0	V
Storage Temperature	TS	-40		+85	°C
Operating Case Temperature	Tc	0		70	°C
Operating Relative Humidity	RH	5		85	%
Damage threshold	Rxdmg	5.5			dBm

Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Power Supply Voltage	Vcc	3.135	3.3	3.465	V	
Power Dissipation	PD			4.5	W	
Transmitter						
Differential data input swing per lane		900			mVp-p	
Differential input impedance	Zin	90	100	110	ohm	
DC common mode voltage (Vcm)		-350		2850	mV	
Receiver						
Differential output amplitude				900	mVp-p	
Differential output impedance	Zout	90	100	110	ohm	
Output Rise/Fall Time	tr/tf	12			ps	20%~80%
AC Common Mode Output Voltage				7.5	mV	
Eye width		0.57			UI	
Eye height differential		228			mV	@TP4, 1E-15
DC common mode voltage (Vcm)		-350		2850	mV	1

Notes:

1. Vcm is generated by the host. Specification includes effects of ground offset voltage.

Optical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Transmitter						
Signaling speed			53.125		Gbaud	
Modulation format		PAM4				
Optical center wavelength	λ	$\lambda_c-6.5$	λ_c	$\lambda_c+6.5$	nm	
Side-mode suppression ratio	SMSR	30			dB	
Extinction ratio	ER	3.5			dB	
Transmit OMA	TxOMA	0.7		4.7	dBm	
Transmit average	TxAvg	-1.4		4.5	dBm	1
Launch power in OMA _{outer} minus TDECQ		-0.7			dBm	2
Launch power in OMA _{outer} minus TDECQ		-0.6			dBm	3
Transmitter and dispersion eye closure	TDECQ			3.4	dB	
Optical return loss tolerance				15.6	dB	4
Receiver						
Signaling speed			53.125		Gbaud	
Damage threshold		5.5			dBm	
Receive power (OMA _{outer})	RxOMA			4.7	dBm	
Average receive power	RxAvg	-7.7		4.5	dBm	
Receiver sensitivity (OMA _{outer})	SenOMA			Max(-6.1, SECQ-7.5)	dBm	5
Receiver reflectance				-26	dB	
LOS assert	LOSA	-15			dBm	
LOS De-assert	LOSD			-12	dBm	
LOS hysteresis		0.5			dB	

Notes:

1. Average launch power (min) is informative and not the principal indicator of signal strength. A transmitter with launch power below this value cannot be compliant; however, a value above this does not ensure compliance.
2. For $ER \geq 4.5\text{dB}$
3. For $ER < 4.5\text{dB}$
4. Transmitter reflectance is defined looking into the transmitter.
5. Sensitivity is specified at 2.4×10^{-4} BER.

Pin Descriptions


Pin	Symbol	Name/Descriptions	Ref.
1	GND	Transmitter Ground (Common with Receiver Ground)	1
2	Tx2-	Transmitter Inverted Data Input	
3	Tx2+	Transmitter Non-Inverted Data output	
4	GND	Transmitter Ground (Common with Receiver Ground)	1
5	Tx4-	Transmitter Inverted Data Input	
6	Tx4+	Transmitter Non-Inverted Data output	
7	GND	Transmitter Ground (Common with Receiver Ground)	1
8	ModSelL	Module Select	2
9	ResetL	Module Reset	2
10	VccRx	3.3V Power Supply Receiver	
11	SCL	2-Wire serial Interface Clock	2
12	SDA	2-Wire serial Interface Data	2
13	GND	Transmitter Ground (Common with Receiver Ground)	1
14	Rx3+	Receiver Non-Inverted Data Output	
15	Rx3-	Receiver Inverted Data Output	
16	GND	Transmitter Ground (Common with Receiver Ground)	1
17	Rx1+	Receiver Non-Inverted Data Output	
18	Rx1-	Receiver Inverted Data Output	
19	GND	Transmitter Ground (Common with Receiver Ground)	1
20	GND	Transmitter Ground (Common with Receiver Ground)	1
21	Rx2-	Receiver Inverted Data Output	
22	Rx2+	Receiver Non-Inverted Data Output	
23	GND	Transmitter Ground (Common with Receiver Ground)	1
24	Rx4-	Receiver Inverted Data Output	1
25	Rx4+	Receiver Non-Inverted Data Output	
26	GND	Transmitter Ground (Common with Receiver Ground)	1
27	ModPrsl	Module Present	
28	IntL	Interrupt	2
29	VccTx	3.3V power supply transmitter	
30	Vcc1	3.3V power supply	
31	LPMode	Low Power Mode	2
32	GND	Transmitter Ground (Common with Receiver Ground)	1
33	Tx3+	Transmitter Non-Inverted Data Input	
34	Tx3-	Transmitter Inverted Data Output	

35	GND	Transmitter Ground (Common with Receiver Ground)	1
36	Tx1+	Transmitter Non-Inverted Data Input	
37	Tx1-	Transmitter Inverted Data Output	
38	GND	Transmitter Ground (Common with Receiver Ground)	1


Notes:

1. The module signal grounds are isolated from the module case.
2. This is an open collector/drain output that on the host board requires a $4.7\text{K}\Omega$ to $10\text{K}\Omega$ pull-up resistor to VccHost.

Electrical Pin-out Details

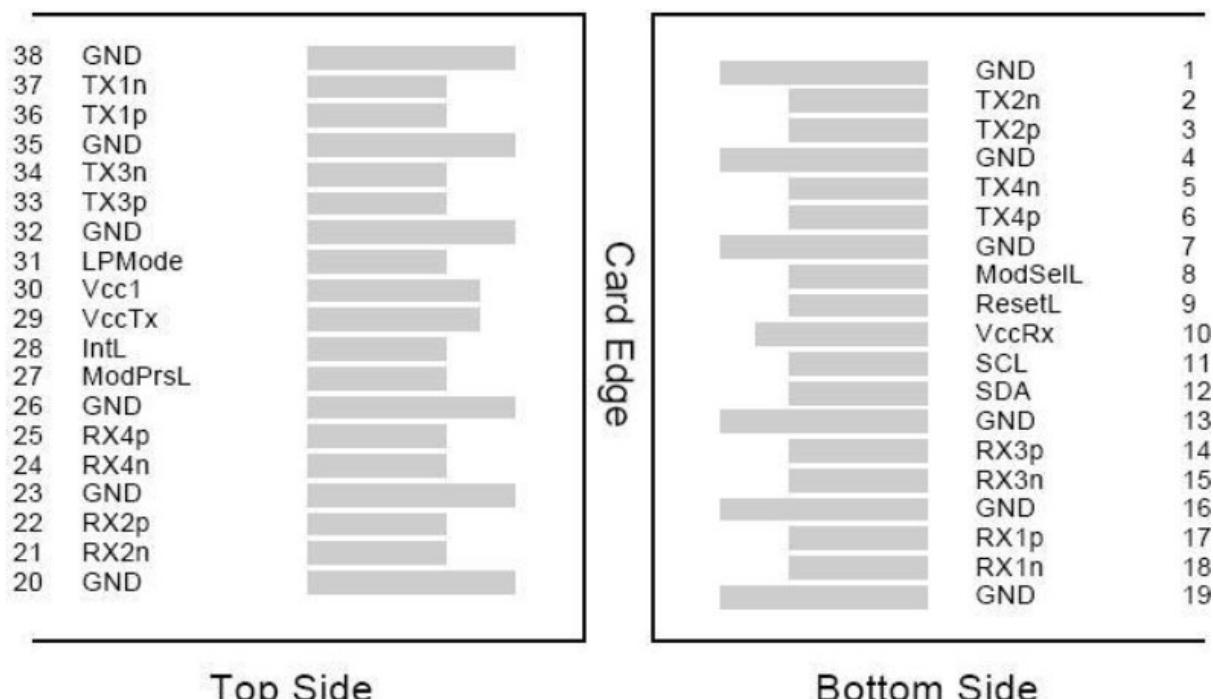

Mechanical Specifications

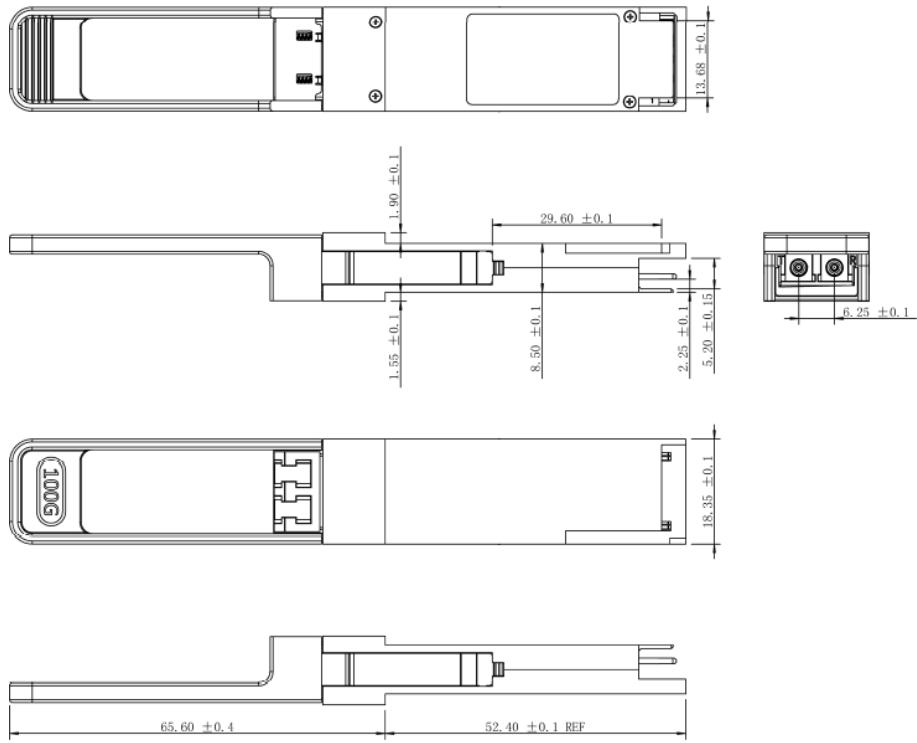

About ProLabs

Our extensive experience comes as standard. For over 20 years ProLabs has delivered optical connectivity solutions that give our customers freedom and choice through our ability to provide seamless interoperability. At the heart of our company is the ability to provide state-of-the-art optical transport and connectivity solutions that are compatible with more than 100 optical switching and transport platforms.

A Complete Portfolio of Network Solutions

ProLabs is focused on innovations in optical transport and connectivity. The combination of our knowledge of optics and networking equipment enables ProLabs to be your single source for optical transport and connectivity solutions from 100Mb to 1.6T while providing innovative solutions that increase network efficiency. We provide the optical connectivity expertise that is compatible with and enhances your switching and transport equipment.

The Trusted Partner

Customer service is our number one value. ProLabs has invested in people, labs and manufacturing capacity to ensure compatible products, and immediate answers to your questions. With Engineering and Manufacturing offices in the U.K. and U.S. augmented by field offices throughout the U.S., U.K. and Asia, ProLabs is able to be our customers best advocate 24 hours a day.



Contact Information

ProLabs US

Email: sales@prolabs.com
Telephone: 952-852-0252

ProLabs UK

Email: salessupport@prolabs.com
Telephone: +44 1285 719 600