

### 321-1582-C

8PK NetScout® 321-1582 Compatible TAA 1000Base-SX SFP Transceiver (MMF, 850nm, 550m, LC, DOM)

#### Features:

- INF-8074 and SFF-8472 Compliance
- Duplex LC Connector
- VCSEL transmitter and PIN receiver
- Multi-mode Fiber
- Commercial Temperature 0 to 70 Celsius
- Hot Pluggable
- Metal with Lower EMI
- Excellent ESD Protection
- RoHS Compliant and Lead Free



#### Applications:

- 1000Base-SX Ethernet
- 1x Fibre Channel
- Access and Enterprise

#### Product Description

This 8-pack of NetScout® 321-1582 compatible SFP transceivers provides 1000Base-SX throughput up to 550m over multi-mode fiber (MMF) using a wavelength of 850nm via an LC connector. It can operate at temperatures between 0 and 70C. Our transceiver is built to meet or exceed OEM specifications and is guaranteed to be 100% compatible with NetScout®. It has been programmed, uniquely serialized, and tested for data-traffic and application to ensure that it will initialize and perform identically. All of our transceivers comply with Multi-Source Agreement (MSA) standards to provide seamless network integration. Additional product features include Digital Optical Monitoring (DOM) support which allows access to real-time operating parameters. This transceiver is Trade Agreements Act (TAA) compliant. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

ProLabs' transceivers are RoHS compliant and lead-free.

TAA refers to the Trade Agreements Act (19 U.S.C. & 2501-2581), which is intended to foster fair and open international trade. TAA requires that the U.S. Government may acquire only "U.S.-made or designated country end products.")



## Absolute Maximum Ratings

| Parameter                    | Symbol | Min. | Typ.  | Max. | Unit | Notes |
|------------------------------|--------|------|-------|------|------|-------|
| Supply Voltage               | Vcc    | -0.5 |       | 4.0  | V    |       |
| Storage Temperature          | Tstg   | -40  |       | 85   | °C   |       |
| Case Operating Temperature   | Tc     | 0    |       | 70   | °C   |       |
| Operating Humidity           | RH     | 5    |       | 95   | %    |       |
| Data Rate (Gigabit Ethernet) |        |      | 1.25  |      | Gbps |       |
| Data Rate (Fibre Channel)    |        |      | 1.063 |      | Gbps |       |
| 50/125µm MMF                 | L      |      |       | 550  | m    |       |
| Power Consumption            |        |      |       | 0.87 | W    |       |

## Electrical Characteristics

| Parameter                      | Symbol  | Min.    | Typ. | Max.    | Unit | Notes |
|--------------------------------|---------|---------|------|---------|------|-------|
| Power Supply Voltage           | Vcc     | 3.13    | 3.30 | 3.47    | V    |       |
| Power Supply Current           | Icc     |         |      | 250     | mA   |       |
| <b>Transmitter</b>             |         |         |      |         |      |       |
| Input Differential Impedance   | RIN     |         | 100  |         | Ω    | 1     |
| Single-Ended Data Input Swing  | VIN,pp  | 250     |      | 1200    | mV   |       |
| Tx_Disable - High              |         | Vcc-1.3 |      | Vcc     | V    |       |
| Tx_Disable - Low               |         | Vee     |      | Vee+0.8 | V    |       |
| Tx_Fault - High                |         | Vcc-0.5 |      | Vcc     | V    |       |
| Tx_Fault - Low                 |         | Vee     |      | Vee+0.5 | V    |       |
| <b>Receiver</b>                |         |         |      |         |      |       |
| Single-Ended Data Output Swing | VOUT,pp | 300     | 400  | 800     | mV   | 2     |
| Data Output Rise Time          | Tr      |         |      | 175     | ps   | 3     |
| Data Output Fall Time          | Tf      |         |      | 175     | ps   | 3     |
| LOS - High                     |         | Vcc-0.5 |      | Vcc     | V    |       |
| LOS - Low                      |         | Vee     |      | Vee+0.5 | V    |       |

### Notes:

1. AC coupled.
2. Into 100Ω differential termination.
3. 20-80%.

## Optical Characteristics

| Parameter                | Symbol            | Min. | Typ. | Max. | Unit | Notes |
|--------------------------|-------------------|------|------|------|------|-------|
| Transmitter              |                   |      |      |      |      |       |
| Average Output Power     | PO                | -9   |      | -4   | dBm  | 1     |
| Optical Wavelength       | $\lambda$         | 830  | 850  | 860  | nm   |       |
| Spectral Width           | $\sigma$          |      |      | 0.85 | nm   |       |
| Optical Rise/Fall Time   | Tr/Tf             |      |      | 260  | ps   | 2     |
| Total Jitter             | TJ                |      |      | 200  | ps   |       |
| Optical Extinction Ratio | ER                | 9    |      |      | dB   |       |
| Receiver                 |                   |      |      |      |      |       |
| Receiver Sensitivity     | RSENS             |      |      | -18  | dBm  | 3, 4  |
| Maximum Received Power   | RX <sub>MAX</sub> | 0    |      |      | dBm  |       |
| Center Wavelength        | $\lambda_C$       | 770  |      | 860  | nm   |       |
| LOS De-Assert            | LOSD              |      |      | -26  | dBm  |       |
| LOS Assert               | LOSA              | -40  |      |      | dBm  |       |
| LOS Hysteresis           |                   | 0.5  |      | 5    | dB   |       |

### Notes:

1. Class 1 laser safety.
2. Unfiltered, 20-80%. Complies with GE and 1xFC eye masks when filtered.
3. Measured with conformance signals defined in FC-PI-2 Rev. 10.0 specifications.
4. Measured with PRBS 2<sup>7</sup>-1 at 10<sup>-10</sup> BER.

## Pin Descriptions

| Pin | Symbol      | Name/Description                                                 | Notes |
|-----|-------------|------------------------------------------------------------------|-------|
| 1   | VeeT        | Transmitter Ground (Common with Receiver Ground).                | 1     |
| 2   | Tx_Fault    | Transmitter Fault.                                               |       |
| 3   | Tx_Disable  | Transmitter Disable. Laser output disabled on “high” or “open.”  | 2     |
| 4   | MOD_DEF(2)  | Module Definition 2. Data Line for Serial ID.                    | 3     |
| 5   | MOD_DEF(1)  | Module Definition 1. Clock Line for Serial ID.                   | 3     |
| 6   | MOD_DEF(0)  | Module Definition 0. Grounded within the module.                 | 3     |
| 7   | Rate Select | No Connection Required.                                          |       |
| 8   | LOS         | Loss of Signal Indication. “Logic 0” indicates normal operation. | 4     |
| 9   | VeeR        | Receiver Ground (Common with Transmitter Ground).                | 1     |
| 10  | VeeR        | Receiver Ground (Common with Transmitter Ground).                | 1     |
| 11  | VeeR        | Receiver Ground (Common with Transmitter Ground).                | 1     |
| 12  | RD-         | Receiver Inverted Data Out. AC Coupled.                          |       |
| 13  | RD+         | Receiver Non-Inverted Data Out. AC Coupled.                      |       |
| 14  | VeeR        | Receiver Ground (Common with Transmitter Ground).                | 1     |
| 15  | VccR        | Receiver Power Supply.                                           |       |
| 16  | VccT        | Transmitter Power Supply.                                        |       |
| 17  | VeeT        | Transmitter Ground (Common with Receiver Ground).                | 1     |
| 18  | TD+         | Transmitter Non-Inverted Data In. AC Coupled.                    |       |
| 19  | TD-         | Transmitter Inverted Data In. AC Coupled.                        |       |
| 20  | VeeT        | Transmitter Ground (Common with Receiver Ground).                | 1     |


## Notes:

1. The circuit ground is internally isolated from the chassis ground.
2. Laser output is disabled on Tx\_Disable>2.0V or open, enabled on Tx\_Disable<0.8V.
3. Should be pulled up with 4.7kΩ to 10kΩ on the host board to a voltage between 2.0V and 3.6V. MOD\_DEF(0) pulls the line low to indicate that the module is plugged in.
4. LOS is an open collector output. Should be pulled up with 4.7kΩ to 10kΩ on the host board to a voltage between 2.0V and 3.6V. “Logic 0” indicates normal operation. “Logic 1” indicates a loss of signal.




Pin-Out of Connector Block on the Host Board

## Recommended Circuit Schematic

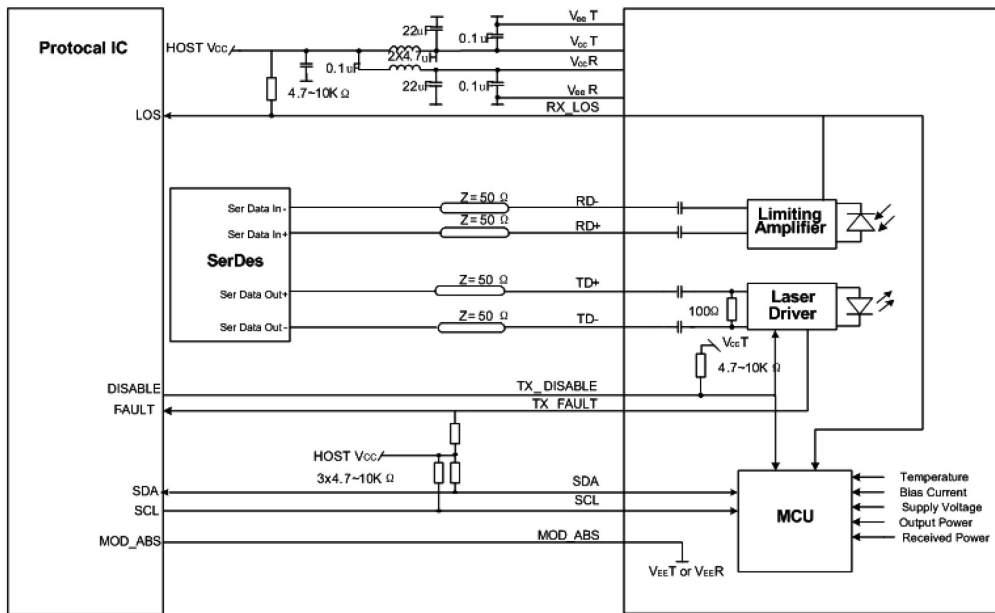


**Mechanical Specifications**

Small Form Factor Pluggable (SFP) transceivers are compatible with the dimensions defined by the SFP Multi-Sourcing Agreement (MSA).

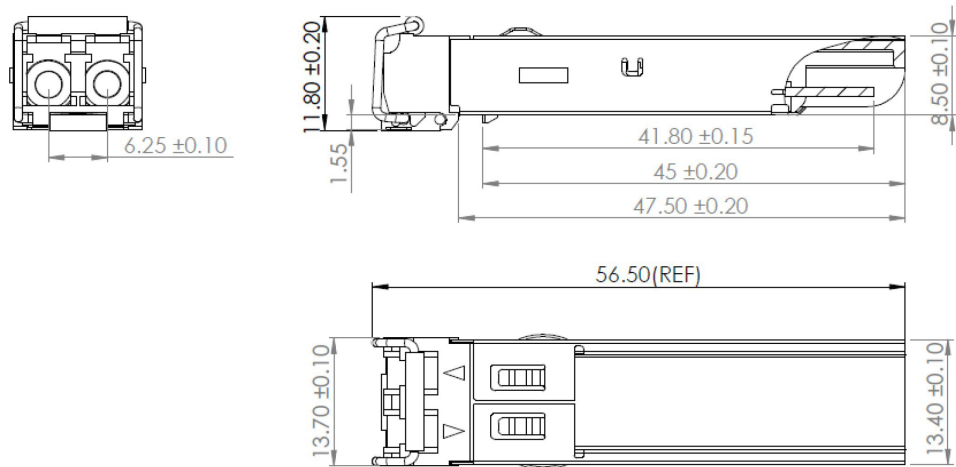

**EEPROM Information**

EEPROM memory map-specific data field description is as below:

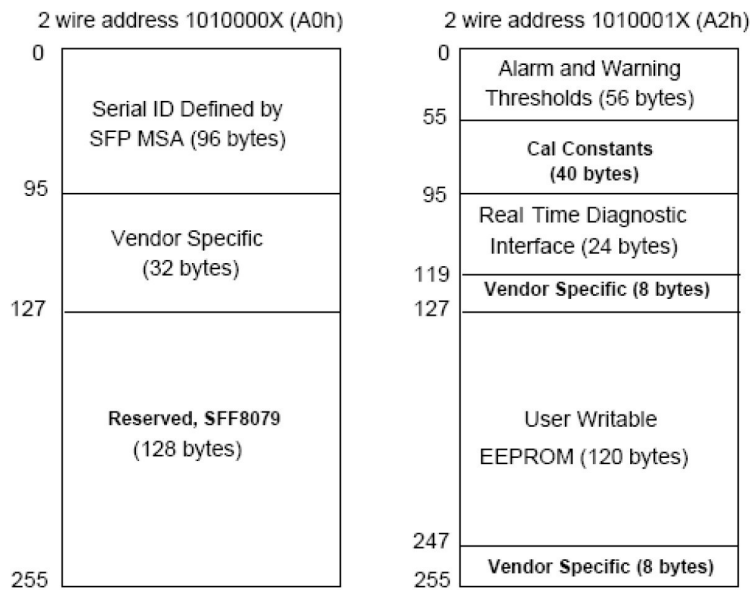

## About ProLabs

Our extensive experience comes as standard. For over 20 years ProLabs has delivered optical connectivity solutions that give our customers freedom and choice through our ability to provide seamless interoperability. At the heart of our company is the ability to provide state-of-the-art optical transport and connectivity solutions that are compatible with more than 100 optical switching and transport platforms.

## A Complete Portfolio of Network Solutions

ProLabs is focused on innovations in optical transport and connectivity. The combination of our knowledge of optics and networking equipment enables ProLabs to be your single source for optical transport and connectivity solutions from 100Mb to 1.6T while providing innovative solutions that increase network efficiency. We provide the optical connectivity expertise that is compatible with and enhances your switching and transport equipment.

## The Trusted Partner

Customer service is our number one value. ProLabs has invested in people, labs and manufacturing capacity to ensure compatible products, and immediate answers to your questions. With Engineering and Manufacturing offices in the U.K. and U.S. augmented by field offices throughout the U.S., U.K. and Asia, ProLabs is able to be our customers best advocate 24 hours a day.



## Contact Information

ProLabs US

Email: [sales@prolabs.com](mailto:sales@prolabs.com)

Telephone: 952-852-0252

ProLabs UK

Email: [salesupport@prolabs.com](mailto:salesupport@prolabs.com)

Telephone: +44 1285 719 600