

Siemens  
EcoTech



Circuit breaker size S0 for motor protection, Class 10 A-release 0.18...0.25 A  
Short-circuit release 3.3 A Screw terminal Standard switching capacity



|                                                                 |                      |
|-----------------------------------------------------------------|----------------------|
| product brand name                                              | SIRIUS               |
| product designation                                             | Circuit breaker      |
| design of the product                                           | For motor protection |
| product type designation                                        | 3RV2                 |
| General technical data                                          |                      |
| size of the circuit-breaker                                     | S0                   |
| size of contactor can be combined company-specific              | S00, S0              |
| product extension auxiliary switch                              | Yes                  |
| power loss [W] for rated value of the current                   |                      |
| • at AC in hot operating state                                  | 5.5 W                |
| • at AC in hot operating state per pole                         | 1.8 W                |
| insulation voltage with degree of pollution 3 at AC rated value | 690 V                |
| surge voltage resistance rated value                            | 6 kV                 |
| shock resistance according to IEC 60068-2-27                    | 25g / 11 ms          |
| mechanical service life (operating cycles)                      |                      |
| • of the main contacts typical                                  | 100 000              |
| • of auxiliary contacts typical                                 | 100 000              |
| electrical endurance (operating cycles) typical                 | 100 000              |
| reference code according to IEC 81346-2                         | Q                    |
| Substance Prohibitance (Date)                                   | 10/01/2009           |
| SVHC substance name                                             | Lead - 7439-92-1     |
| Weight                                                          | 0.3 kg               |
| Ambient conditions                                              |                      |
| installation altitude at height above sea level maximum         | 2 000 m              |
| ambient temperature                                             |                      |
| • during operation                                              | -20 ... +60 °C       |
| • during storage                                                | -50 ... +80 °C       |
| • during transport                                              | -50 ... +80 °C       |
| relative humidity during operation                              | 10 ... 95 %          |
| Environmental footprint                                         |                      |
| Environmental Product Declaration(EPD)                          | Yes                  |
| global warming potential [CO2 eq] total                         | 75.078 kg            |
| global warming potential [CO2 eq] during manufacturing          | 2.68 kg              |
| global warming potential [CO2 eq] during sales                  | 0.143 kg             |
| global warming potential [CO2 eq] during operation              | 72.7 kg              |
| global warming potential [CO2 eq] after end of life             | -0.445 kg            |
| Siemens Eco Profile (SEP)                                       | Siemens EcoTech      |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                              |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|
| <b>Main circuit</b>                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                              |
| number of poles for main current circuit                                                                                                                                                                                                                                                                                                                                                                                                            | 3                                                                            |
| adjustable current response value current of the current-dependent overload release                                                                                                                                                                                                                                                                                                                                                                 | 0.18 ... 0.25 A                                                              |
| type of voltage for main current circuit                                                                                                                                                                                                                                                                                                                                                                                                            | AC                                                                           |
| operating voltage <ul style="list-style-type: none"> <li>• rated value</li> <li>• at AC-3 rated value maximum</li> <li>• at AC-3e rated value maximum</li> </ul>                                                                                                                                                                                                                                                                                    | 20 ... 690 V<br>690 V<br>690 V                                               |
| operating frequency rated value                                                                                                                                                                                                                                                                                                                                                                                                                     | 50 ... 60 Hz                                                                 |
| operational current rated value                                                                                                                                                                                                                                                                                                                                                                                                                     | 0.25 A                                                                       |
| operational current <ul style="list-style-type: none"> <li>• at AC-3 at 400 V rated value</li> <li>• at AC-3e at 400 V rated value</li> </ul>                                                                                                                                                                                                                                                                                                       | 0.25 A<br>0.25 A                                                             |
| operating power <ul style="list-style-type: none"> <li>• at AC-3 <ul style="list-style-type: none"> <li>— at 230 V rated value</li> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> <li>— at 690 V rated value</li> </ul> </li> <li>• at AC-3e <ul style="list-style-type: none"> <li>— at 230 V rated value</li> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> <li>— at 690 V rated value</li> </ul> </li> </ul> | 0 kW<br>0.1 kW<br>0.1 kW<br>0.1 kW<br><br>0 kW<br>0.1 kW<br>0.1 kW<br>0.1 kW |
| operating frequency <ul style="list-style-type: none"> <li>• at AC-3 maximum</li> <li>• at AC-3e maximum</li> </ul>                                                                                                                                                                                                                                                                                                                                 | 15 1/h<br>15 1/h                                                             |
| <b>Auxiliary circuit</b>                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                              |
| type of voltage for auxiliary and control circuit                                                                                                                                                                                                                                                                                                                                                                                                   | AC/DC                                                                        |
| number of NC contacts for auxiliary contacts                                                                                                                                                                                                                                                                                                                                                                                                        | 0                                                                            |
| number of NO contacts for auxiliary contacts                                                                                                                                                                                                                                                                                                                                                                                                        | 0                                                                            |
| number of CO contacts for auxiliary contacts                                                                                                                                                                                                                                                                                                                                                                                                        | 0                                                                            |
| <b>Protective and monitoring functions</b>                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                              |
| product function <ul style="list-style-type: none"> <li>• ground fault detection</li> <li>• phase failure detection</li> </ul>                                                                                                                                                                                                                                                                                                                      | No<br>Yes                                                                    |
| trip class                                                                                                                                                                                                                                                                                                                                                                                                                                          | CLASS 10                                                                     |
| design of the overload release                                                                                                                                                                                                                                                                                                                                                                                                                      | thermal                                                                      |
| maximum short-circuit current breaking capacity (I <sub>cu</sub> ) <ul style="list-style-type: none"> <li>• at AC at 240 V rated value</li> <li>• at AC at 400 V rated value</li> <li>• at AC at 500 V rated value</li> <li>• at AC at 690 V rated value</li> </ul>                                                                                                                                                                                 | 100 kA<br>100 kA<br>100 kA<br>100 kA                                         |
| operating short-circuit current breaking capacity (I <sub>cs</sub> ) at AC <ul style="list-style-type: none"> <li>• at 240 V rated value</li> <li>• at 400 V rated value</li> <li>• at 500 V rated value</li> <li>• at 690 V rated value</li> </ul>                                                                                                                                                                                                 | 100 kA<br>100 kA<br>100 kA<br>100 kA                                         |
| response value current of instantaneous short-circuit trip unit                                                                                                                                                                                                                                                                                                                                                                                     | 3.3 A                                                                        |
| <b>UL/CSA ratings</b>                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                              |
| full-load current (FLA) for 3-phase AC motor <ul style="list-style-type: none"> <li>• at 480 V rated value</li> <li>• at 600 V rated value</li> </ul>                                                                                                                                                                                                                                                                                               | 0.25 A<br>0.25 A                                                             |
| <b>Short-circuit protection</b>                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                              |
| product function short circuit protection                                                                                                                                                                                                                                                                                                                                                                                                           | Yes                                                                          |
| design of the short-circuit trip                                                                                                                                                                                                                                                                                                                                                                                                                    | magnetic                                                                     |
| <b>Installation/ mounting/ dimensions</b>                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                              |
| mounting position                                                                                                                                                                                                                                                                                                                                                                                                                                   | any                                                                          |
| fastening method                                                                                                                                                                                                                                                                                                                                                                                                                                    | screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715     |
| height                                                                                                                                                                                                                                                                                                                                                                                                                                              | 97 mm                                                                        |

|                                                                                                                                                  |                                                   |
|--------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|
| <b>width</b>                                                                                                                                     | 45 mm                                             |
| <b>depth</b>                                                                                                                                     | 97 mm                                             |
| <b>required spacing</b>                                                                                                                          |                                                   |
| <ul style="list-style-type: none"> <li>• with side-by-side mounting at the side</li> </ul>                                                       | 0 mm                                              |
| <ul style="list-style-type: none"> <li>• for grounded parts at 400 V <ul style="list-style-type: none"> <li>— downwards</li> </ul> </li> </ul>   | 30 mm                                             |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— upwards</li> </ul> </li> </ul>                                  | 30 mm                                             |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— at the side</li> </ul> </li> </ul>                              | 9 mm                                              |
| <ul style="list-style-type: none"> <li>• for live parts at 400 V <ul style="list-style-type: none"> <li>— downwards</li> </ul> </li> </ul>       | 30 mm                                             |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— upwards</li> </ul> </li> </ul>                                  | 30 mm                                             |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— at the side</li> </ul> </li> </ul>                              | 9 mm                                              |
| <ul style="list-style-type: none"> <li>• for grounded parts at 500 V <ul style="list-style-type: none"> <li>— downwards</li> </ul> </li> </ul>   | 30 mm                                             |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— upwards</li> </ul> </li> </ul>                                  | 30 mm                                             |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— at the side</li> </ul> </li> </ul>                              | 9 mm                                              |
| <ul style="list-style-type: none"> <li>• for live parts at 500 V <ul style="list-style-type: none"> <li>— downwards</li> </ul> </li> </ul>       | 30 mm                                             |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— upwards</li> </ul> </li> </ul>                                  | 30 mm                                             |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— at the side</li> </ul> </li> </ul>                              | 9 mm                                              |
| <ul style="list-style-type: none"> <li>• for grounded parts at 690 V <ul style="list-style-type: none"> <li>— downwards</li> </ul> </li> </ul>   | 50 mm                                             |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— upwards</li> </ul> </li> </ul>                                  | 50 mm                                             |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— backwards</li> </ul> </li> </ul>                                | 0 mm                                              |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— at the side</li> </ul> </li> </ul>                              | 30 mm                                             |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— forwards</li> </ul> </li> </ul>                                 | 0 mm                                              |
| <ul style="list-style-type: none"> <li>• for live parts at 690 V <ul style="list-style-type: none"> <li>— downwards</li> </ul> </li> </ul>       | 50 mm                                             |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— upwards</li> </ul> </li> </ul>                                  | 50 mm                                             |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— backwards</li> </ul> </li> </ul>                                | 0 mm                                              |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— at the side</li> </ul> </li> </ul>                              | 30 mm                                             |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— forwards</li> </ul> </li> </ul>                                 | 0 mm                                              |
| <b>Connections/ Terminals</b>                                                                                                                    |                                                   |
| <b>type of electrical connection</b>                                                                                                             |                                                   |
| <ul style="list-style-type: none"> <li>• for main current circuit</li> </ul>                                                                     | screw-type terminals                              |
| <b>arrangement of electrical connectors for main current circuit</b>                                                                             | Top and bottom                                    |
| <b>type of connectable conductor cross-sections</b>                                                                                              |                                                   |
| <ul style="list-style-type: none"> <li>• for main contacts <ul style="list-style-type: none"> <li>— solid or stranded</li> </ul> </li> </ul>     | 2x (1 ... 2.5 mm²), 2x (2.5 ... 10 mm²)           |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— finely stranded with core end processing</li> </ul> </li> </ul> | 2x (1 ... 2.5 mm²), 2x (2.5 ... 6 mm²), 1x 10 mm² |
| <ul style="list-style-type: none"> <li>• for AWG cables for main contacts</li> </ul>                                                             | 2x (16 ... 12), 2x (14 ... 8)                     |
| <b>tightening torque</b>                                                                                                                         |                                                   |
| <ul style="list-style-type: none"> <li>• for main contacts with screw-type terminals</li> </ul>                                                  | 2 ... 2.5 N·m                                     |
| <b>design of screwdriver shaft</b>                                                                                                               | Diameter 5 to 6 mm                                |
| <b>size of the screwdriver tip</b>                                                                                                               | Pozidriv size 2                                   |
| <b>design of the thread of the connection screw</b>                                                                                              |                                                   |
| <ul style="list-style-type: none"> <li>• for main contacts</li> </ul>                                                                            | M4                                                |
| <b>Safety related data</b>                                                                                                                       |                                                   |
| product function suitable for safety function                                                                                                    | Yes                                               |
| <b>suitability for use</b>                                                                                                                       |                                                   |
| <ul style="list-style-type: none"> <li>• safety-related switching on</li> </ul>                                                                  | No                                                |
| <ul style="list-style-type: none"> <li>• safety-related switching OFF</li> </ul>                                                                 | Yes                                               |
| <b>service life maximum</b>                                                                                                                      | 10 a                                              |
| <b>test wear-related service life necessary</b>                                                                                                  | Yes                                               |
| <b>proportion of dangerous failures</b>                                                                                                          |                                                   |
| <ul style="list-style-type: none"> <li>• with low demand rate according to SN 31920</li> </ul>                                                   | 40 %                                              |
| <ul style="list-style-type: none"> <li>• with high demand rate according to SN 31920</li> </ul>                                                  | 50 %                                              |
| <b>B10 value with high demand rate according to SN 31920</b>                                                                                     | 5 000                                             |
| <b>failure rate [FIT] with low demand rate according to SN 31920</b>                                                                             | 50 FIT                                            |

|                                                                                                                           |                                                  |
|---------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------|
| ISO 13849                                                                                                                 |                                                  |
| device type according to ISO 13849-1                                                                                      | 3                                                |
| overdimensioning according to ISO 13849-2 necessary                                                                       | Yes                                              |
| IEC 61508                                                                                                                 |                                                  |
| safety device type according to IEC 61508-2                                                                               | Type A                                           |
| T1 value <ul style="list-style-type: none"> <li>for proof test interval or service life according to IEC 61508</li> </ul> | 10 a                                             |
| Electrical Safety                                                                                                         |                                                  |
| protection class IP on the front according to IEC 60529                                                                   | IP20                                             |
| touch protection on the front according to IEC 60529                                                                      | finger-safe, for vertical contact from the front |
| Display                                                                                                                   |                                                  |
| display version for switching status                                                                                      | Handle                                           |
| Approvals Certificates                                                                                                    |                                                  |
| General Product Approval                                                                                                  |                                                  |



[KC](#)



|                          |                                |                   |                      |
|--------------------------|--------------------------------|-------------------|----------------------|
| General Product Approval | For use in hazardous locations | Test Certificates | Maritime application |
|--------------------------|--------------------------------|-------------------|----------------------|



[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)



|                      |       |
|----------------------|-------|
| Maritime application | other |
|----------------------|-------|



[Miscellaneous](#)

|       |         |             |
|-------|---------|-------------|
| other | Railway | Environment |
|-------|---------|-------------|



[Confirmation](#)



[Special Test Certificate](#)

[Confirmation](#)



|             |
|-------------|
| Environment |
|-------------|

Siemens  
EcoTech



[Environmental Confirmations](#)

|                     |
|---------------------|
| Further information |
|---------------------|

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2021-0CA10>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2021-0CA10>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2021-0CA10>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)



[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RV2021-0CA10&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2021-0CA10&lang=en)



Characteristic: Tripping characteristics,  $I^2t$ , Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2021-0CA10/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2021-0CA10&objecttype=14&gridview=view1>

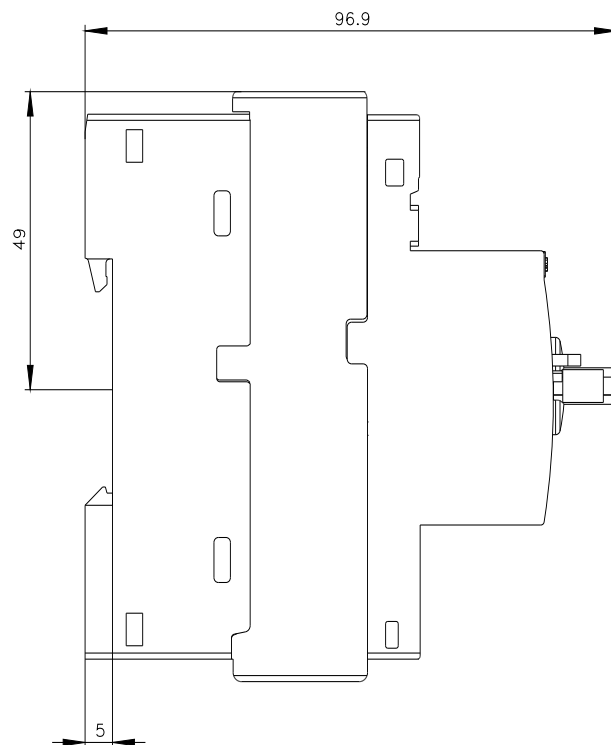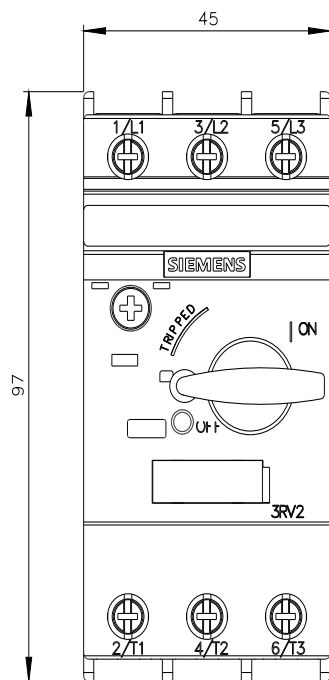

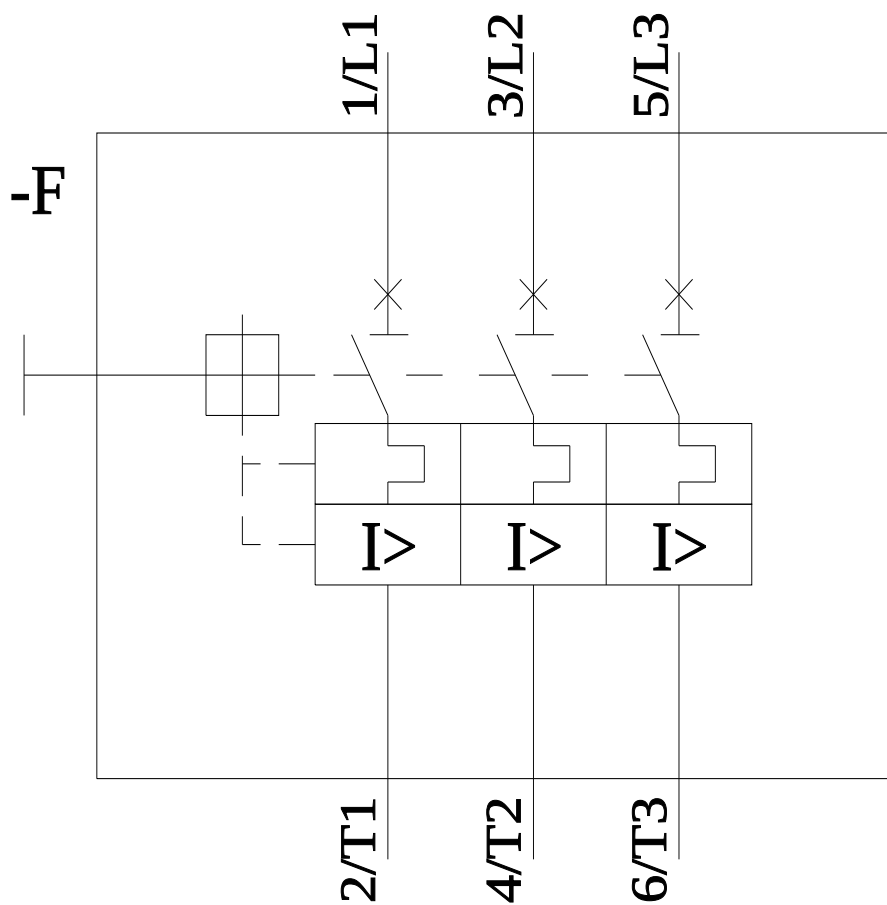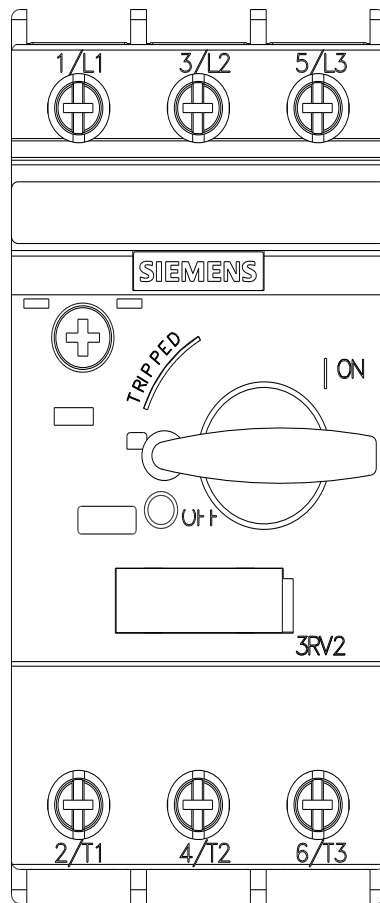

last modified:

5/16/2025