



shunt trip flexible 600 V AC 50/60 Hz accessory for: 3VA1 and 3VA20-26

Model	
product brand name	SENTRON
product designation	Auxiliary release
accessories	Auxiliary release
General technical data	
degree of pollution	3
overvoltage category	III
apparent power consumption / maximum	300 VA
Voltage	
surge voltage resistance	4 kV
Mechanical Design	
height	65.1 mm
width	21.7 mm
number of slots	3
depth	31.2 mm
net weight	91 g
tightening torque / with screw-type terminals / minimum	0.4 N·m
tightening torque / with screw-type terminals / maximum	0.5 N·m
Connections according IEC	
stripped length	10 mm
connectable conductor cross-section • minimum • maximum	0.5 ... 1.5
AWG number / as coded connectable conductor cross section / for auxiliary contacts • minimum • maximum	
	20
	16
Connetctions according UL	
stripped length [in]	0.4 in
tightening torque [lbf·in] / with screw-type terminals / minimum	3.5 lbf·in
tightening torque [lbf·in] / with screw-type terminals / maximum	4.4 lbf·in
Certificates	
General Product Approval	
EMV	
Test Certificates	



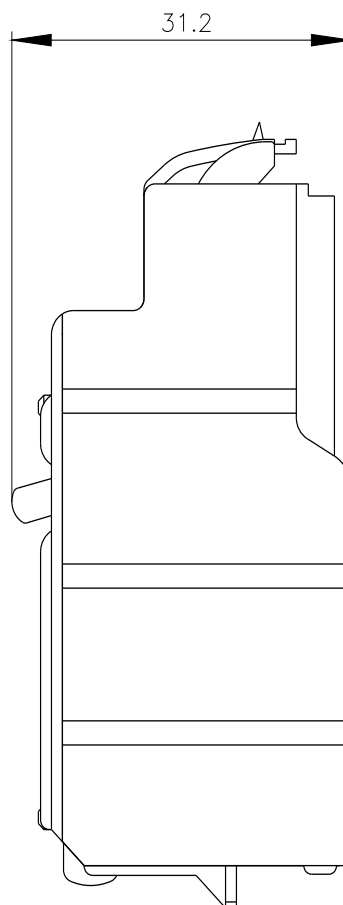
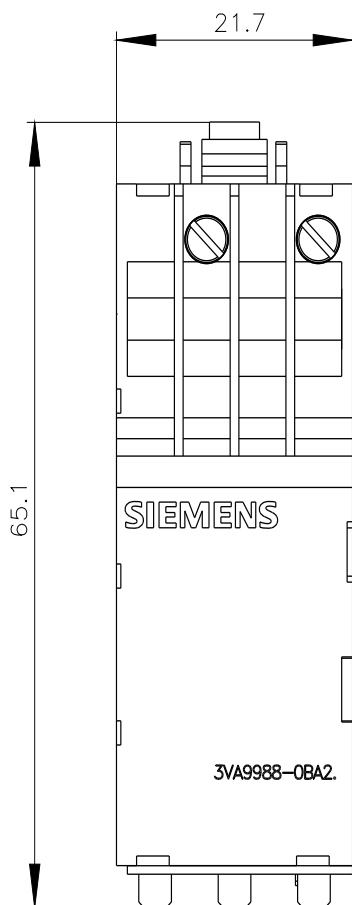
Miscellaneous



Type Test Certificates/Test Report

[Confirmation](#)[Miscellaneous](#)[Environmental Con-
firmations](#)[Environmental Con-
firmations](#)

Further information

Information on the packaging<https://support.industry.siemens.com/cs/ww/en/view/109813875>**Information for data generation and storage**<https://support.industry.siemens.com/cs/ww/en/view/109995012>**Information- and Downloadcenter (Catalogs, Brochures,...)**<http://www.siemens.com/lowvoltage/catalogs>**Industry Mall (Online ordering system)**<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9988-0BA25>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<https://support.industry.siemens.com/cs/ww/en/ps/3VA9988-0BA25>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9988-0BA25**CAX-Online-Generator**<http://www.siemens.com/cax>**Tender specifications**<http://www.siemens.com/specifications>



last modified:

4/3/2025 

