



Overload relay 1...4 A Electronic For motor protection Size S00, Class 5...30
Contactor mounting Main circuit: Screw Auxiliary circuit: Screw Manual-Automatic-
Reset Internal ground fault detection

product brand name	SIRIUS
product designation	solid-state overload relay
product type designation	3RB3
General technical data	
size of overload relay	S00
size of contactor can be combined company-specific	S00
power loss [W] for rated value of the current at AC in hot operating state	0.1 W
• per pole	0.03 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation	
• in networks with ungrounded star point between auxiliary and auxiliary circuit	300 V
• in networks with grounded star point between auxiliary and auxiliary circuit	300 V
• in networks with ungrounded star point between main and auxiliary circuit	600 V
• in networks with grounded star point between main and auxiliary circuit	690 V
shock resistance	15g / 11 ms
• according to IEC 60068-2-27	15g / 11 ms; Signaling contact 97 / 98 in position "Tripped": 9g / 11 ms
vibration resistance	1-6 Hz, 15 mm; 6-500 Hz, 20 m/s ² ; 10 cycles
thermal current	4 A
recovery time after overload trip	
• with automatic reset typical	3 min
• with remote-reset	0 min
• with manual reset	0 min
reference code according to IEC 81346-2	F
Substance Prohibitance (Date)	10/01/2009
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8 2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol - 79-94-7 6,6'-di-tert-butyl-2,2'-methylenedi-p-cresol - 119-47-1
Net Weight	0.225 kg
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
• during operation	-25 ... +60 °C
• during storage	-40 ... +80 °C
• during transport	-40 ... +80 °C

temperature compensation	-25 ... +60 °C
relative humidity during operation	10 ... 95 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current-dependent overload release	1 ... 4 A
operating voltage - rated value - for remote-reset function at DC - at AC-3e rated value maximum	690 V 24 V 690 V
operating frequency rated value	50 ... 60 Hz
operational current rated value	4 A
operational current at AC-3e at 400 V rated value	4 A
operating power - for 3-phase motors at 400 V at 50 Hz - for AC motors at 500 V at 50 Hz - for AC motors at 690 V at 50 Hz	0.37 ... 1.5 kW 0.37 ... 2.2 kW 0.55 ... 3 kW
Auxiliary circuit	
design of the auxiliary switch	integrated
number of NC contacts for auxiliary contacts note	1 for contactor disconnection
number of NO contacts for auxiliary contacts note	1 for message "tripped"
number of CO contacts for auxiliary contacts	0
operational current of auxiliary contacts at AC-15 - at 24 V - at 110 V - at 120 V - at 125 V - at 230 V	4 A 4 A 4 A 4 A 3 A
operational current of auxiliary contacts at DC-13 - at 24 V - at 60 V - at 110 V - at 125 V - at 220 V	2 A 0.55 A 0.3 A 0.3 A 0.11 A
Protective and monitoring functions	
trip class	CLASS 5E, 10E, 20E and 30E adjustable
design of the overload release	electronic
response value current of the grounding protection minimum	0.75 x IMotor
response time of the grounding protection in settled state	1 000 ms
operating range of the grounding protection relating to current set value - minimum - maximum	IMotor > lower current setting value IMotor < upper current setting value x 3.5
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor - at 480 V rated value - at 600 V rated value	4 A 4 A
contact rating of auxiliary contacts according to UL	B600 / R300
Short-circuit protection	
design of the fuse link - for short-circuit protection of the main circuit - with type of coordination 1 required - with type of coordination 2 required - for short-circuit protection of the auxiliary switch required	gG: 35 A, RK5: 15 A gG: 20 A fuse gG: 6 A
Installation/ mounting/ dimensions	
mounting position	any
fastening method	Contactor mounting

height	79 mm		
width	45 mm		
depth	73 mm		
Connections/ Terminals			
product component removable terminal for auxiliary and control circuit	Yes		
type of electrical connection - for main current circuit - for auxiliary and control circuit	screw-type terminals screw-type terminals		
arrangement of electrical connectors for main current circuit	Top and bottom		
type of connectable conductor cross-sections for main contacts - solid - solid or stranded - finely stranded with core end processing	1x (0.5 ... 4 mm²), 2x (0.5 ... 1.5 mm²), 2x (0.75 ... 4 mm²) 1x (0,5 ... 4 mm²), 2x (0,5 ... 1,5 mm²), 2x (0,75 ... 4 mm²) 1x (0.5 ... 2.5 mm²), 2x (0.5 ... 2.5 mm²)		
type of connectable conductor cross-sections - for auxiliary contacts - solid - solid or stranded - finely stranded with core end processing - for AWG cables for auxiliary contacts	1x (0.5 ... 4 mm²), 2x (0.5 ... 2.5 mm²) 1x (0,5 ... 4 mm²), 2x (0,5 ... 2,5 mm²) 1x (0.5 ... 2.5 mm²), 2x (0.5 ... 1.5 mm²) 1x (20 ... 14), 2x (20 ... 14)		
tightening torque - for main contacts with screw-type terminals - for auxiliary contacts with screw-type terminals	0.8 ... 1.2 N·m 0.8 ... 1.2 N·m		
design of screwdriver shaft	Diameter 5 to 6 mm		
size of the screwdriver tip	Pozidriv PZ 2		
design of the thread of the connection screw - for main contacts - of the auxiliary and control contacts	M3 M3		
Electrical Safety			
protection class IP on the front according to IEC 60529	IP20		
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front		
Communication/ Protocol			
type of voltage supply via input/output link master	No		
Electromagnetic compatibility			
conducted interference - due to burst according to IEC 61000-4-4 - due to conductor-earth surge according to IEC 61000-4-5 - due to conductor-conductor surge according to IEC 61000-4-5 - due to high-frequency radiation according to IEC 61000-4-6	2 kV (power ports), 1 kV (signal ports) corresponds to degree of severity 3 2 kV (line to earth) corresponds to degree of severity 3 1 kV (line to line) corresponds to degree of severity 3 10 V in frequency range 0.15 to 80 MHz, modulation 80 % AM with 1 kHz		
field-based interference according to IEC 61000-4-3	10 V/m		
electrostatic discharge according to IEC 61000-4-2	6 kV contact discharge / 8 kV air discharge		
Display			
display version for switching status	Slide switch		
Approvals Certificates			
General Product Approval			
EMV			
 CCC   EG-Konf.  UL   RCM			
EMV	For use in hazardous locations	Test Certificates	Maritime application

[KC](#)



[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



Maritime application

other



[Confirmation](#)

Environment

[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RB3113-4PB0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RB3113-4PB0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)



https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RB3113-4PB0&lang=en


Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RB3113-4PB0>

Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP="HAUPT"></mmp_prod_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>)

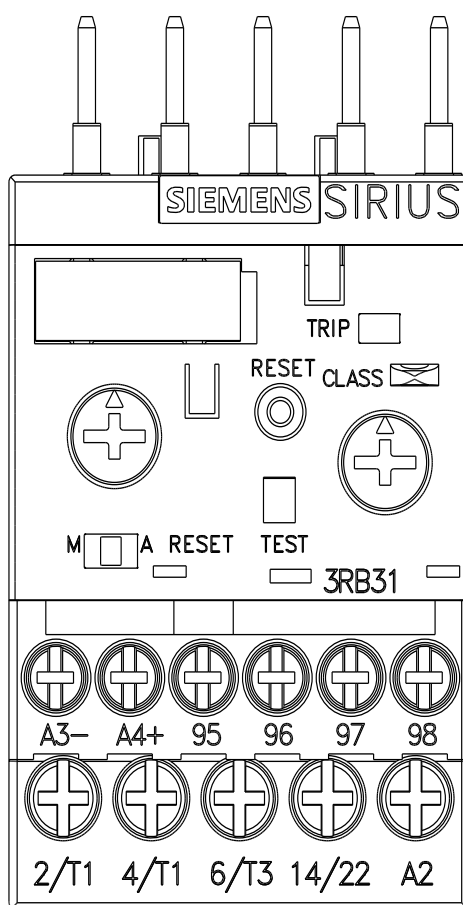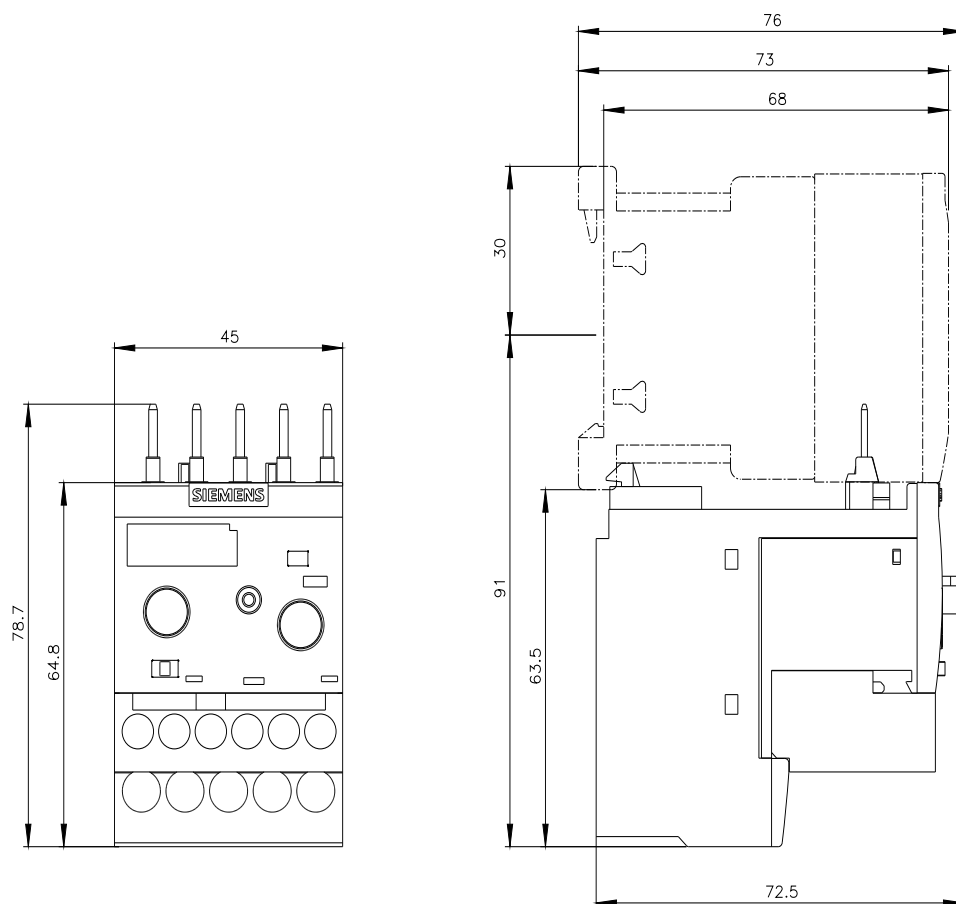

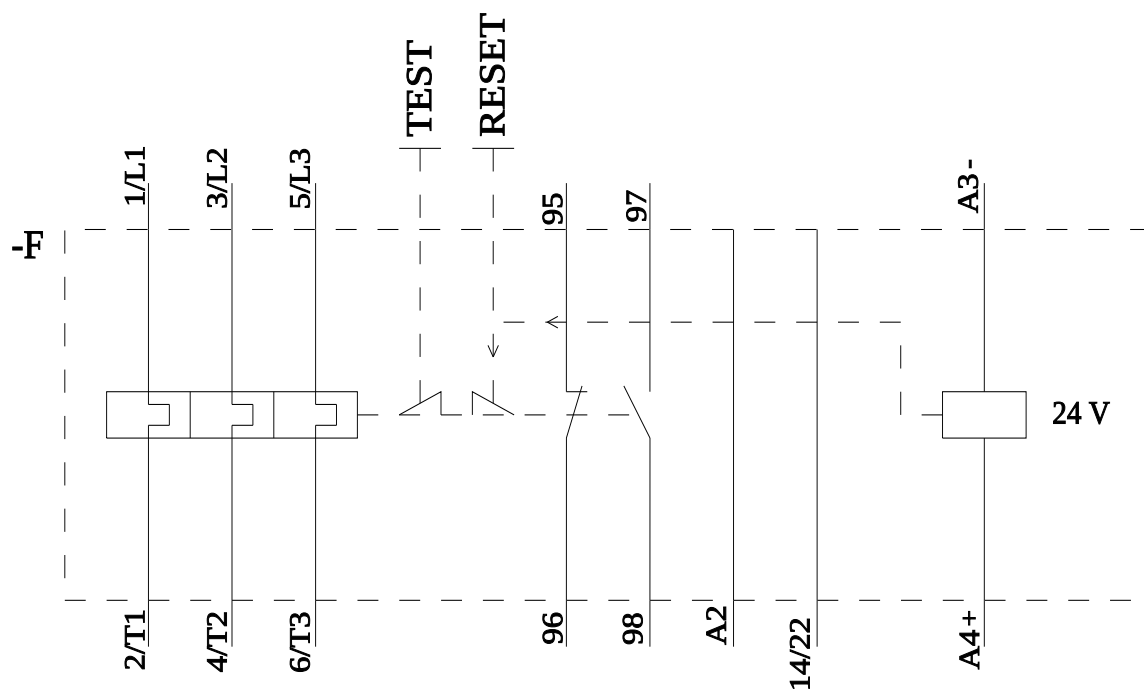

last modified:

4/2/2025