



!!! phased-out product !!! The preferred successor is 6ES7141-5BF00-0BL0 IO-Link module K20, digital 4 DI, IP67, 4x 1 input sensor supply max. 200 mA 2 x M12 socket Y-assignment

General technical data		
product designation		IO-Link module K20
design of the product		4 digital inputs
display version		- as status display of the inputs/outputs - as status display of the input/output link communication - as status display of the input/output link device
evaluable diagnostic message via input/output link		overload/short-circuit sensor supply, internal error
protection class IP		IP67
product function control circuit interface with IO link		Yes
type of voltage supply via input/output link master		Yes
installation altitude at height above sea level maximum	m	4 000
ambient temperature		- during storage - during operation
	°C	-40 ... +85
	°C	-25 ... +70
EMC immunity according to IEC 60947-1		ambience A (industrial sector)
EMC emitted interference according to IEC 60947-1		CISPR11, ambience A (industrial sector)
reference code according to DIN 40719 extended according to IEC 204-2 according to IEC 750		A
reference code according to EN 61346-2		K
Inputs/ Outputs		
number of digital inputs		4
number of digital outputs		0
type of parameterization		- of the input delay time - of the inverting of the input signal
		adjustable for each module (1 ms, 3 ms, 15 ms, 20 ms) adjustable for each input
ampacity of the sensor supply		- maximum - of socket 1 to 4 maximum
	mA	200
	mA	200
input current at digital input		- initial value for signal<1>-recognition - full-scale value for signal<0> recognition
	mA	11
	mA	1.5
input voltage at digital input 1 initial value for signal<1>-recognition	V	10
Supply voltage		
type of voltage of the supply voltage		DC
supply voltage		1 at DC rated value - at DC rated value
	V	24

— minimum permissible

V

18

— maximum permissible

V

30

Installation/ mounting/ dimensions

fastening method		frontal or lateral wall mounting
width	mm	20
height	mm	108
depth	mm	45

Connections/ Terminals

number of input/output sockets		2
design of the pin assignment of the inputs		Y assignment
contact assignment		
• of socket 1 at PIN 1		sensor supply +
• of socket 1 at PIN 2		IN2
• of socket 1 at PIN 3		sensor supply -
• of socket 1 at PIN 4		IN1
• of socket 1 at PIN 5		not assigned
• of socket 2 at PIN 1		sensor supply +
• of socket 2 at PIN 2		IN4
• of socket 2 at PIN 3		sensor supply -
• of socket 2 at PIN 4		IN3
• of socket 2 at PIN 5		not assigned

Certificates/ approvals

certificate of suitability		CE		
General Product Approval			EMV	other



[KC](#)



other	Environment
-------	-------------

[Confirmation](#)

[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK5010-0BA10-0AA0>

Cax online generator


<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK5010-0BA10-0AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK5010-0BA10-0AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK5010-0BA10-0AA0&lang=en

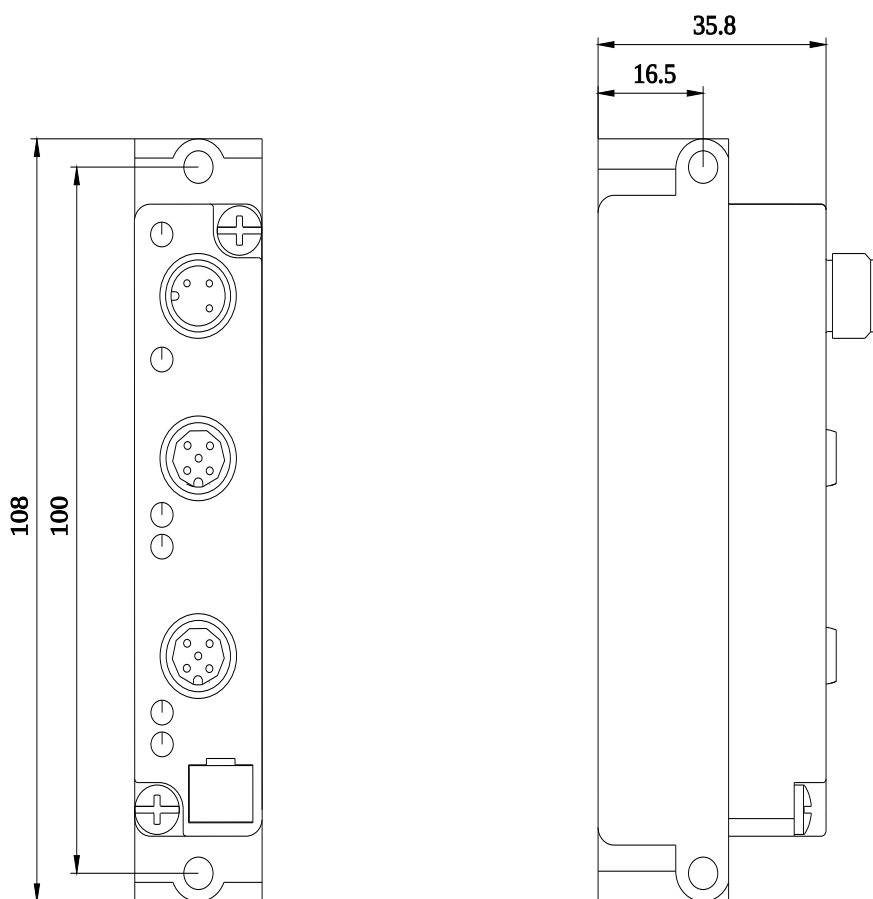

last modified:

4/2/2025 