



Load feeder fuseless, Direct-on-line starting 400 V AC, Size S00 0.55...0.80 A 230 V AC Spring-type terminal for 60 mm busbar systems (also fulfills type of coordination 1) Type of coordination 2, I<sub>q</sub> = 150 kA 1 NO (contactor)

|                                                                                     |                               |
|-------------------------------------------------------------------------------------|-------------------------------|
| product brand name                                                                  | SIRIUS                        |
| product designation                                                                 | Direct (on-line) starter      |
| design of the product                                                               | for 60 mm busbars             |
| product type designation                                                            | 3RA21                         |
| manufacturer's article number                                                       |                               |
| • of the supplied contactor                                                         | <a href="#">3RT2015-2AP01</a> |
| • of the supplied circuit-breakers                                                  | <a href="#">3RV2011-0HA20</a> |
| • of the supplied busbar adapter                                                    | <a href="#">8US1251-5DT11</a> |
| • of the supplied link module                                                       | <a href="#">3RA2911-2AA00</a> |
| <b>General technical data</b>                                                       |                               |
| size of the circuit-breaker                                                         | S00                           |
| size of load feeder                                                                 | S00                           |
| power loss [W] for rated value of the current                                       |                               |
| • at AC in hot operating state per pole                                             | 2.6 W                         |
| • without load current share typical                                                | 4.2 W                         |
| insulation voltage with degree of pollution 3 at AC rated value                     | 690 V                         |
| surge voltage resistance rated value                                                | 6 kV                          |
| degree of protection NEMA rating                                                    | other                         |
| shock resistance according to IEC 60068-2-27                                        | 6g / 11 ms                    |
| mechanical service life (operating cycles) of contactor typical                     | 30 000 000                    |
| type of coordination                                                                | 2                             |
| reference code according to IEC 81346-2:2019                                        | Q                             |
| Substance Prohibition (Date)                                                        | 10/01/2009                    |
| SVHC substance name                                                                 | Lead - 7439-92-1              |
| Net Weight                                                                          | 1.061 kg                      |
| <b>Ambient conditions</b>                                                           |                               |
| ambient temperature                                                                 |                               |
| • during operation                                                                  | -20 ... +60 °C                |
| • during storage                                                                    | -50 ... +80 °C                |
| • during transport                                                                  | -50 ... +80 °C                |
| temperature compensation                                                            | -20 ... +60 °C                |
| relative humidity during operation                                                  | 10 ... 95 %                   |
| <b>Main circuit</b>                                                                 |                               |
| number of poles for main current circuit                                            | 3                             |
| design of the switching contact                                                     | electromechanical             |
| adjustable current response value current of the current-dependent overload release | 0.55 ... 0.8 A                |
| operating voltage                                                                   |                               |
| • rated value                                                                       | 690 V                         |

|                                                                                                                                                        |                                        |
|--------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|
| <ul style="list-style-type: none"> <li>• at AC-3 rated value maximum</li> </ul>                                                                        | 690 V                                  |
| <ul style="list-style-type: none"> <li>• at AC-3e rated value maximum</li> </ul>                                                                       | 690 V                                  |
| <b>operating frequency rated value</b>                                                                                                                 | 50 ... 60 Hz                           |
| <b>operational current</b>                                                                                                                             |                                        |
| <ul style="list-style-type: none"> <li>• at AC-3 at 400 V rated value</li> </ul>                                                                       | 0.8 A                                  |
| <ul style="list-style-type: none"> <li>• at AC-3e at 400 V rated value</li> </ul>                                                                      | 0.8 A                                  |
| <b>operating power</b>                                                                                                                                 |                                        |
| <ul style="list-style-type: none"> <li>• at AC-3 <ul style="list-style-type: none"> <li>— at 400 V rated value</li> </ul> </li> </ul>                  | 180 W                                  |
| <ul style="list-style-type: none"> <li>• at AC-3e <ul style="list-style-type: none"> <li>— at 400 V rated value</li> </ul> </li> </ul>                 | 180 W                                  |
| <b>Control circuit/ Control</b>                                                                                                                        |                                        |
| <b>type of voltage of the control supply voltage</b>                                                                                                   | AC                                     |
| <b>control supply voltage at AC</b>                                                                                                                    |                                        |
| <ul style="list-style-type: none"> <li>• at 50 Hz rated value</li> </ul>                                                                               | 230 V                                  |
| <ul style="list-style-type: none"> <li>• at 60 Hz rated value</li> </ul>                                                                               | 230 V                                  |
| <b>apparent holding power of magnet coil at AC</b>                                                                                                     | 4.2 VA                                 |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> </ul>                                                                                           | 4.2 VA                                 |
| <ul style="list-style-type: none"> <li>• at 60 Hz</li> </ul>                                                                                           | 3.3 VA                                 |
| <b>inductive power factor with the holding power of the coil</b>                                                                                       | 0.25                                   |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> </ul>                                                                                           | 0.25                                   |
| <ul style="list-style-type: none"> <li>• at 60 Hz</li> </ul>                                                                                           | 0.25                                   |
| <b>Auxiliary circuit</b>                                                                                                                               |                                        |
| <b>product extension auxiliary switch</b>                                                                                                              | Yes                                    |
| <b>Protective and monitoring functions</b>                                                                                                             |                                        |
| <b>trip class</b>                                                                                                                                      | CLASS 10                               |
| <b>design of the overload release</b>                                                                                                                  | thermal (bimetallic)                   |
| response value current of instantaneous short-circuit trip unit                                                                                        | 10 A                                   |
| <b>UL/CSA ratings</b>                                                                                                                                  |                                        |
| <b>full-load current (FLA) for 3-phase AC motor</b>                                                                                                    |                                        |
| <ul style="list-style-type: none"> <li>• at 480 V rated value</li> </ul>                                                                               | 0.8 A                                  |
| <ul style="list-style-type: none"> <li>• at 600 V rated value</li> </ul>                                                                               | 0.8 A                                  |
| <b>yielded mechanical performance [hp]</b>                                                                                                             |                                        |
| <ul style="list-style-type: none"> <li>• for 3-phase AC motor <ul style="list-style-type: none"> <li>— at 460/480 V rated value</li> </ul> </li> </ul> | 0.5 hp                                 |
| <ul style="list-style-type: none"> <li>— at 575/600 V rated value</li> </ul>                                                                           | 0.5 hp                                 |
| <b>Short-circuit protection</b>                                                                                                                        |                                        |
| <b>product function short circuit protection</b>                                                                                                       | Yes                                    |
| <b>design of the short-circuit trip</b>                                                                                                                | magnetic                               |
| <b>conditional short-circuit current (I<sub>q</sub>)</b>                                                                                               |                                        |
| <ul style="list-style-type: none"> <li>• at 400 V according to IEC 60947-4-1 rated value</li> </ul>                                                    | 150 000 A                              |
| <b>Installation/ mounting/ dimensions</b>                                                                                                              |                                        |
| <b>mounting position</b>                                                                                                                               | vertical                               |
| <b>fastening method</b>                                                                                                                                | for snapping onto 60 mm busbar systems |
| <b>height</b>                                                                                                                                          | 260 mm                                 |
| <b>width</b>                                                                                                                                           | 45 mm                                  |
| <b>depth</b>                                                                                                                                           | 155 mm                                 |
| <b>required spacing</b>                                                                                                                                |                                        |
| <ul style="list-style-type: none"> <li>• for grounded parts <ul style="list-style-type: none"> <li>— forwards</li> </ul> </li> </ul>                   | 20 mm                                  |
| <ul style="list-style-type: none"> <li>— backwards</li> </ul>                                                                                          | 0 mm                                   |
| <ul style="list-style-type: none"> <li>— upwards</li> </ul>                                                                                            | 50 mm                                  |
| <ul style="list-style-type: none"> <li>— at the side</li> </ul>                                                                                        | 20 mm                                  |
| <ul style="list-style-type: none"> <li>— downwards</li> </ul>                                                                                          | 10 mm                                  |
| <ul style="list-style-type: none"> <li>• for live parts <ul style="list-style-type: none"> <li>— forwards</li> </ul> </li> </ul>                       | 20 mm                                  |
| <ul style="list-style-type: none"> <li>— backwards</li> </ul>                                                                                          | 0 mm                                   |
| <ul style="list-style-type: none"> <li>— upwards</li> </ul>                                                                                            | 50 mm                                  |
| <ul style="list-style-type: none"> <li>— downwards</li> </ul>                                                                                          | 10 mm                                  |

— at the side

20 mm

## Connections/ Terminals

### type of electrical connection

- for main current circuit
- for auxiliary and control circuit

spring-loaded terminals  
spring-loaded terminals

## Safety related data

product function suitable for safety function

Yes

### Electrical Safety

touch protection on the front according to IEC 60529

finger-safe, for vertical contact from the front

## Communication/ Protocol

### protocol is supported

- PROFINET IO protocol
- PROIsafe protocol

No  
No

protocol is supported AS-Interface protocol

No

## Approvals Certificates

General Product Approval

For use in hazard-  
ous locations

Test Certificates



[Special Test Certificate](#)

Test Certificates

Maritime application

[Type Test Certificates/Test Report](#)



Maritime application

other

Railway

Environment



[Confirmation](#)

[Special Test Certificate](#)

[Environmental Confirmations](#)

## Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA2110-0HH15-1AP0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RA2110-0HH15-1AP0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RA2110-0HH15-1AP0&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA2110-0HH15-1AP0&lang=en)

Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA2110-0HH15-1AP0>

Characteristic curves

[https://curves.simar.siemens.com/curves/<mmp\\_prod\\_noCOMP='HAUPT'></mmp\\_prod\\_no>](https://curves.simar.siemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>)

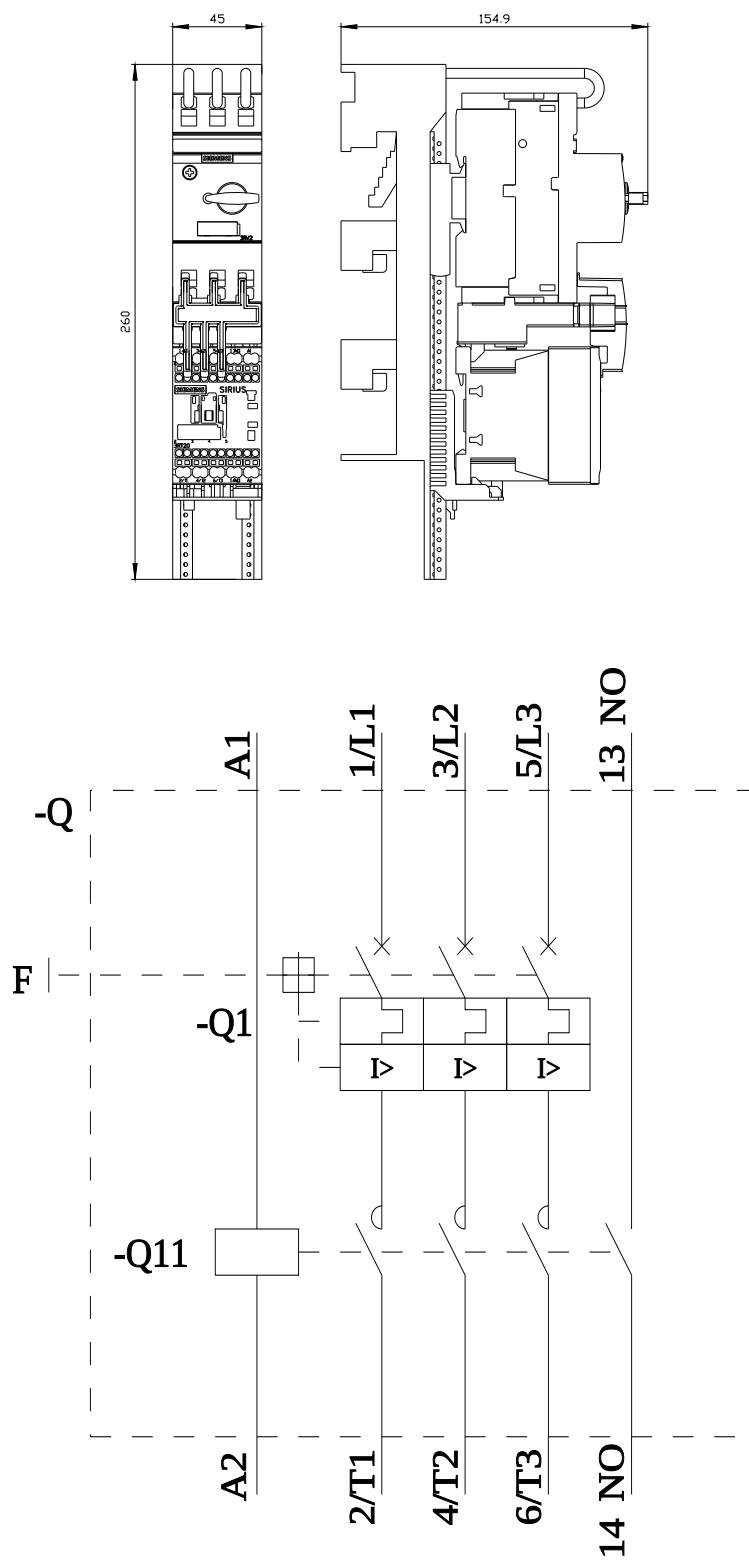

last modified:

4/1/2025 