



Circuit breaker size S00 for motor protection, CLASS 10 A-release 0.28...0.4 A N-release 5.2 A screw terminal Standard switching capacity

|                                                                 |                      |
|-----------------------------------------------------------------|----------------------|
| product brand name                                              | SIRIUS               |
| product designation                                             | Circuit breaker      |
| design of the product                                           | For motor protection |
| product type designation                                        | 3RV2                 |
| <b>General technical data</b>                                   |                      |
| size of the circuit-breaker                                     | S00                  |
| size of contactor can be combined company-specific              | S00, S0              |
| product extension auxiliary switch                              | Yes                  |
| power loss [W] for rated value of the current                   |                      |
| • at AC in hot operating state                                  | 5.5 W                |
| • at AC in hot operating state per pole                         | 1.8 W                |
| insulation voltage with degree of pollution 3 at AC rated value | 690 V                |
| surge voltage resistance rated value                            | 6 kV                 |
| shock resistance according to IEC 60068-2-27                    | 25g / 11 ms          |
| mechanical service life (operating cycles)                      |                      |
| • of the main contacts typical                                  | 100 000              |
| • of auxiliary contacts typical                                 | 100 000              |
| electrical endurance (operating cycles) typical                 | 100 000              |
| reference code according to IEC 81346-2                         | Q                    |
| Substance Prohibition (Date)                                    | 10/01/2009           |
| SVHC substance name                                             | Lead - 7439-92-1     |
| Net Weight                                                      | 280 g                |
| <b>Ambient conditions</b>                                       |                      |
| installation altitude at height above sea level maximum         | 2 000 m              |
| ambient temperature                                             |                      |
| • during operation                                              | -20 ... +60 °C       |
| • during storage                                                | -50 ... +80 °C       |
| • during transport                                              | -50 ... +80 °C       |
| relative humidity during operation                              | 10 ... 95 %          |
| <b>Environmental footprint</b>                                  |                      |
| Environmental Product Declaration (EPD)                         | Yes                  |
| global warming potential [CO2 eq] total                         | 74.698 kg            |
| global warming potential [CO2 eq] during manufacturing          | 1.98 kg              |
| global warming potential [CO2 eq] during sales                  | 0.134 kg             |
| global warming potential [CO2 eq] during operation              | 72.7 kg              |
| global warming potential [CO2 eq] after end of life             | -0.116 kg            |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                    |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
| Siemens Eco Profile (SEP)                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Siemens EcoTech                                                                    |
| <b>Main circuit</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                    |
| <b>number of poles for main current circuit</b>                                                                                                                                                                                                                                                                                                                                                                                                                                        | 3                                                                                  |
| <b>adjustable current response value current of the current-dependent overload release</b>                                                                                                                                                                                                                                                                                                                                                                                             | 0.28 ... 0.4 A                                                                     |
| <b>type of voltage for main current circuit</b>                                                                                                                                                                                                                                                                                                                                                                                                                                        | AC                                                                                 |
| <b>operating voltage</b> <ul style="list-style-type: none"> <li>• rated value</li> <li>• at AC-3 rated value maximum</li> <li>• at AC-3e rated value maximum</li> </ul>                                                                                                                                                                                                                                                                                                                | 20 ... 690 V<br>690 V<br>690 V                                                     |
| <b>operating frequency rated value</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 50 ... 60 Hz                                                                       |
| <b>operational current rated value</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 0.4 A                                                                              |
| <b>operational current</b> <ul style="list-style-type: none"> <li>• at AC-3 at 400 V rated value</li> <li>• at AC-3e at 400 V rated value</li> </ul>                                                                                                                                                                                                                                                                                                                                   | 0.4 A<br>0.4 A                                                                     |
| <b>operating power</b> <ul style="list-style-type: none"> <li>• at AC-3               <ul style="list-style-type: none"> <li>— at 230 V rated value</li> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> <li>— at 690 V rated value</li> </ul> </li> <li>• at AC-3e               <ul style="list-style-type: none"> <li>— at 230 V rated value</li> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> <li>— at 690 V rated value</li> </ul> </li> </ul> | 0.1 kW<br>0.09 kW<br>0.1 kW<br>0.2 kW<br><br>0.1 kW<br>0.09 kW<br>0.1 kW<br>0.2 kW |
| <b>operating frequency</b> <ul style="list-style-type: none"> <li>• at AC-3 maximum</li> <li>• at AC-3e maximum</li> </ul>                                                                                                                                                                                                                                                                                                                                                             | 15 1/h<br>15 1/h                                                                   |
| <b>Auxiliary circuit</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                    |
| <b>type of voltage for auxiliary and control circuit</b>                                                                                                                                                                                                                                                                                                                                                                                                                               | AC/DC                                                                              |
| <b>number of NC contacts for auxiliary contacts</b>                                                                                                                                                                                                                                                                                                                                                                                                                                    | 0                                                                                  |
| <b>number of NO contacts for auxiliary contacts</b>                                                                                                                                                                                                                                                                                                                                                                                                                                    | 0                                                                                  |
| <b>number of CO contacts for auxiliary contacts</b>                                                                                                                                                                                                                                                                                                                                                                                                                                    | 0                                                                                  |
| <b>Protective and monitoring functions</b>                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                    |
| <b>product function</b> <ul style="list-style-type: none"> <li>• ground fault detection</li> <li>• phase failure detection</li> </ul>                                                                                                                                                                                                                                                                                                                                                  | No<br>Yes                                                                          |
| <b>trip class</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | CLASS 10                                                                           |
| <b>design of the overload release</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                  | thermal                                                                            |
| <b>maximum short-circuit current breaking capacity (Icu)</b> <ul style="list-style-type: none"> <li>• at AC at 240 V rated value</li> <li>• at AC at 400 V rated value</li> <li>• at AC at 500 V rated value</li> <li>• at AC at 690 V rated value</li> </ul>                                                                                                                                                                                                                          | 100 kA<br>100 kA<br>100 kA<br>100 kA                                               |
| <b>operating short-circuit current breaking capacity (Ics) at AC</b> <ul style="list-style-type: none"> <li>• at 240 V rated value</li> <li>• at 400 V rated value</li> <li>• at 500 V rated value</li> <li>• at 690 V rated value</li> </ul>                                                                                                                                                                                                                                          | 100 kA<br>100 kA<br>100 kA<br>100 kA                                               |
| <b>response value current of instantaneous short-circuit trip unit</b>                                                                                                                                                                                                                                                                                                                                                                                                                 | 5.2 A                                                                              |
| <b>UL/CSA ratings</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                    |
| <b>full-load current (FLA) for 3-phase AC motor</b> <ul style="list-style-type: none"> <li>• at 480 V rated value</li> <li>• at 600 V rated value</li> </ul>                                                                                                                                                                                                                                                                                                                           | 0.4 A<br>0.4 A                                                                     |
| <b>Category Control Number (CCN)</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                   | E156943 (NKJH, NKJH7)                                                              |
| <b>Short-circuit protection</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                    |
| <b>product function short circuit protection</b>                                                                                                                                                                                                                                                                                                                                                                                                                                       | Yes                                                                                |
| <b>design of the short-circuit trip</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                | magnetic                                                                           |

| Installation/ mounting/ dimensions                                                                                                               |                                                                          |
|--------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|
| <b>mounting position</b>                                                                                                                         | any                                                                      |
| <b>fastening method</b>                                                                                                                          | screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 |
| <b>height</b>                                                                                                                                    | 97 mm                                                                    |
| <b>width</b>                                                                                                                                     | 45 mm                                                                    |
| <b>depth</b>                                                                                                                                     | 97 mm                                                                    |
| <b>required spacing</b>                                                                                                                          |                                                                          |
| <ul style="list-style-type: none"> <li>• with side-by-side mounting at the side</li> </ul>                                                       | 0 mm                                                                     |
| <ul style="list-style-type: none"> <li>• for grounded parts at 400 V <ul style="list-style-type: none"> <li>— downwards</li> </ul> </li> </ul>   | 30 mm                                                                    |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— upwards</li> </ul> </li> </ul>                                  | 30 mm                                                                    |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— at the side</li> </ul> </li> </ul>                              | 9 mm                                                                     |
| <ul style="list-style-type: none"> <li>• for live parts at 400 V <ul style="list-style-type: none"> <li>— downwards</li> </ul> </li> </ul>       | 30 mm                                                                    |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— upwards</li> </ul> </li> </ul>                                  | 30 mm                                                                    |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— at the side</li> </ul> </li> </ul>                              | 9 mm                                                                     |
| <ul style="list-style-type: none"> <li>• for grounded parts at 500 V <ul style="list-style-type: none"> <li>— downwards</li> </ul> </li> </ul>   | 30 mm                                                                    |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— upwards</li> </ul> </li> </ul>                                  | 30 mm                                                                    |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— at the side</li> </ul> </li> </ul>                              | 9 mm                                                                     |
| <ul style="list-style-type: none"> <li>• for live parts at 500 V <ul style="list-style-type: none"> <li>— downwards</li> </ul> </li> </ul>       | 30 mm                                                                    |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— upwards</li> </ul> </li> </ul>                                  | 30 mm                                                                    |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— at the side</li> </ul> </li> </ul>                              | 9 mm                                                                     |
| <ul style="list-style-type: none"> <li>• for grounded parts at 690 V <ul style="list-style-type: none"> <li>— downwards</li> </ul> </li> </ul>   | 50 mm                                                                    |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— upwards</li> </ul> </li> </ul>                                  | 50 mm                                                                    |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— backwards</li> </ul> </li> </ul>                                | 0 mm                                                                     |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— at the side</li> </ul> </li> </ul>                              | 30 mm                                                                    |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— forwards</li> </ul> </li> </ul>                                 | 0 mm                                                                     |
| <ul style="list-style-type: none"> <li>• for live parts at 690 V <ul style="list-style-type: none"> <li>— downwards</li> </ul> </li> </ul>       | 50 mm                                                                    |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— upwards</li> </ul> </li> </ul>                                  | 50 mm                                                                    |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— backwards</li> </ul> </li> </ul>                                | 0 mm                                                                     |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— at the side</li> </ul> </li> </ul>                              | 30 mm                                                                    |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— forwards</li> </ul> </li> </ul>                                 | 0 mm                                                                     |
| Connections/ Terminals                                                                                                                           |                                                                          |
| <b>type of electrical connection</b>                                                                                                             |                                                                          |
| <ul style="list-style-type: none"> <li>• for main current circuit</li> </ul>                                                                     | screw-type terminals                                                     |
| <b>arrangement of electrical connectors for main current circuit</b>                                                                             | Top and bottom                                                           |
| <b>type of connectable conductor cross-sections</b>                                                                                              |                                                                          |
| <ul style="list-style-type: none"> <li>• for main contacts <ul style="list-style-type: none"> <li>— solid or stranded</li> </ul> </li> </ul>     | 2x (0,75 ... 2,5 mm <sup>2</sup> ), 2x 4 mm <sup>2</sup>                 |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— finely stranded with core end processing</li> </ul> </li> </ul> | 2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )    |
| <ul style="list-style-type: none"> <li>• for AWG cables for main contacts</li> </ul>                                                             | 2x (18 ... 14), 2x 12                                                    |
| <b>tightening torque</b>                                                                                                                         |                                                                          |
| <ul style="list-style-type: none"> <li>• for main contacts with screw-type terminals</li> </ul>                                                  | 0.8 ... 1.2 N·m                                                          |
| <b>design of screwdriver shaft</b>                                                                                                               | Diameter 5 to 6 mm                                                       |
| <b>size of the screwdriver tip</b>                                                                                                               | Pozidriv size 2                                                          |
| <b>design of the thread of the connection screw</b>                                                                                              |                                                                          |
| <ul style="list-style-type: none"> <li>• for main contacts</li> </ul>                                                                            | M3                                                                       |
| Safety related data                                                                                                                              |                                                                          |
| product function suitable for safety function                                                                                                    | Yes                                                                      |
| <b>suitability for use</b>                                                                                                                       |                                                                          |
| <ul style="list-style-type: none"> <li>• safety-related switching on</li> </ul>                                                                  | No                                                                       |
| <ul style="list-style-type: none"> <li>• safety-related switching OFF</li> </ul>                                                                 | Yes                                                                      |
| <b>service life maximum</b>                                                                                                                      | 10 a                                                                     |
| <b>test wear-related service life necessary</b>                                                                                                  | Yes                                                                      |

|                                                                      |                                                  |
|----------------------------------------------------------------------|--------------------------------------------------|
| <b>proportion of dangerous failures</b>                              |                                                  |
| • with low demand rate according to SN 31920                         | 40 %                                             |
| • with high demand rate according to SN 31920                        | 50 %                                             |
| <b>B10 value with high demand rate according to SN 31920</b>         | 5 000                                            |
| <b>failure rate [FIT] with low demand rate according to SN 31920</b> | 50 FIT                                           |
| <b>ISO 13849</b>                                                     |                                                  |
| <b>device type according to ISO 13849-1</b>                          | 3                                                |
| <b>overdimensioning according to ISO 13849-2 necessary</b>           | Yes                                              |
| <b>IEC 61508</b>                                                     |                                                  |
| <b>safety device type according to IEC 61508-2</b>                   | Type A                                           |
| <b>T1 value</b>                                                      |                                                  |
| • for proof test interval or service life according to IEC 61508     | 10 a                                             |
| <b>Electrical Safety</b>                                             |                                                  |
| <b>protection class IP on the front according to IEC 60529</b>       | IP20                                             |
| <b>touch protection on the front according to IEC 60529</b>          | finger-safe, for vertical contact from the front |
| <b>Display</b>                                                       |                                                  |
| display version for switching status                                 | Handle                                           |
| <b>Approvals Certificates</b>                                        |                                                  |
| <b>General Product Approval</b>                                      |                                                  |



|                                 |                                       |                                                    |
|---------------------------------|---------------------------------------|----------------------------------------------------|
| <b>General Product Approval</b> | <b>For use in hazardous locations</b> | <b>Test Certificates</b>                           |
|                                 |                                       |                                                    |
|                                 |                                       | <a href="#">Special Test Certificate</a>           |
|                                 |                                       | <a href="#">Type Test Certificates/Test Report</a> |

|                             |  |  |  |  |  |
|-----------------------------|--|--|--|--|--|
| <b>Maritime application</b> |  |  |  |  |  |
|                             |  |  |  |  |  |

|                               |                                          |
|-------------------------------|------------------------------------------|
| <b>other</b>                  | <b>Railway</b>                           |
| <a href="#">Miscellaneous</a> | <a href="#">Confirmation</a>             |
|                               |                                          |
|                               | <a href="#">Special Test Certificate</a> |
|                               | <a href="#">Confirmation</a>             |

|                    |                                             |
|--------------------|---------------------------------------------|
| <b>Environment</b> |                                             |
|                    |                                             |
|                    | <a href="#">Environmental Confirmations</a> |

|                                                                                                                                                                                        |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Further information</b>                                                                                                                                                             |
| Information on the packaging<br><a href="https://support.industry.siemens.com/cs/ww/en/view/109813875">https://support.industry.siemens.com/cs/ww/en/view/109813875</a>                |
| Information for data generation and storage<br><a href="https://support.industry.siemens.com/cs/ww/en/view/109995012">https://support.industry.siemens.com/cs/ww/en/view/109995012</a> |
| Information- and Downloadcenter (Catalogs, Brochures,...)                                                                                                                              |

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2011-0EA10>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2011-0EA10>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)



[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RV2011-0EA10&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2011-0EA10&lang=en)

Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2011-0EA10>

Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp\\_prod\\_noCOMP='HAUPT'></mmp\\_prod\\_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>)

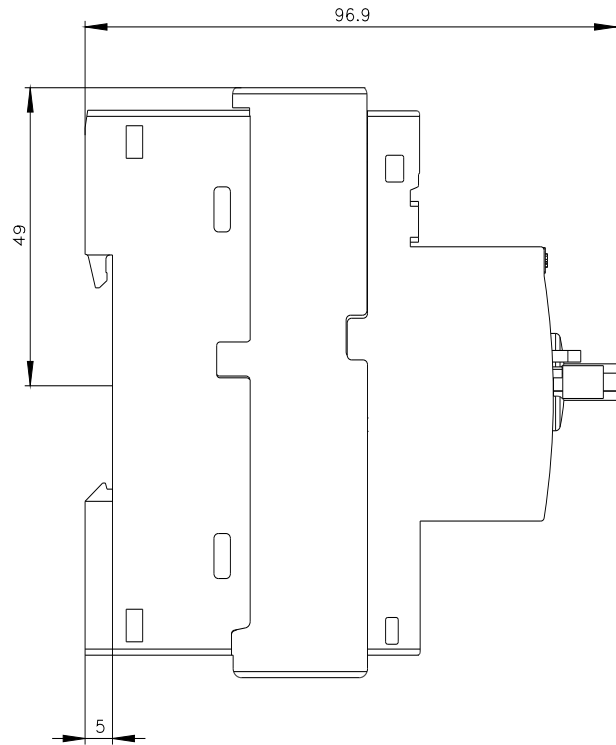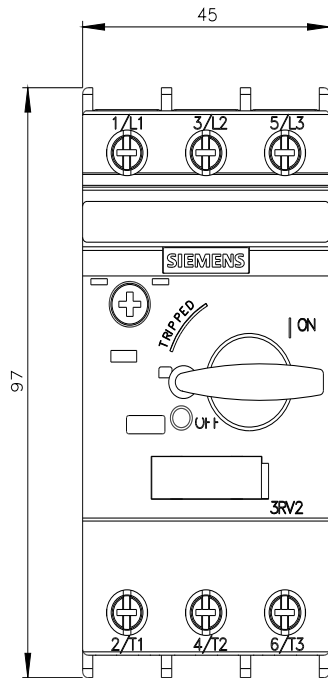



last modified:

11/13/2025