



\*\*\*phase-out type\*\*\* solid-state contactor 1-phase 3RF2 AC 51 / 20 A / 40 °C 48-460 V / 24 V AC/DC screw terminal

|   |  |
|---|--|
| <b>product brand name</b>   | SIRIUS   |
| <b>product designation</b>  | solid-state contactor  |
| <b>design of the product</b>  | 1-pole   |
| <b>product type designation</b>   | 3RF23  |
| <b>manufacturer's article number</b>  |  |
| <ul style="list-style-type: none"> <li>• _1 of the accessories that can be ordered</li> <li>• _3 of the accessories that can be ordered</li> <li>• _4 of the accessories that can be ordered</li> </ul> | <a href="#">3RF2900-3PA88</a><br><a href="#">3RF2900-0EA18</a><br><a href="#">3RF2920-0GA16</a>  |
| <b>product designation</b>  |  |
| <ul style="list-style-type: none"> <li>• _1 of the accessories that can be ordered</li> <li>• _3 of the accessories that can be ordered</li> <li>• _4 of the accessories that can be ordered</li> </ul> | terminal cover<br>converter<br>load monitoring   |
| <b>General technical data</b>   |  |
| <b>product function</b>   | zero-point switching   |
| <b>power loss [W] for rated value of the current</b>  |  |
| <ul style="list-style-type: none"> <li>• at AC in hot operating state</li> <li>• at AC in hot operating state per pole</li> <li>• without load current share typical</li> </ul>                         | 20 W<br>20 W<br>0.5 W  |
| <b>insulation voltage rated value</b>   | 600 V  |
| <b>degree of pollution</b>  | 3  |
| surge voltage resistance of main circuit rated value  | 6 kV   |
| <b>protection class IP</b>  | IP20   |
| protection class IP on the front according to IEC 60529   | IP20   |
| <b>shock resistance according to IEC 60068-2-27</b>   | 15 g / 11 ms   |
| <b>vibration resistance according to IEC 60068-2-6</b>  | 2 g  |
| <b>reference code according to IEC 81346-2</b>  | Q  |
| <b>Substance Prohibitance (Date)</b>  | 05/28/2009   |
| <b>SVHC substance name</b>  | Lead CAS-No. 7439-92-1<br>Lead monoxide (lead oxide) CAS-No. 1317-36-8<br>2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one CAS-No. 71868-10-5<br>Melamine CAS-No. 108-78-1<br>Dibutylbis(pentane-2,4-dionato-O,O')tin CAS-No. 22673-19-4 |
| <b>Net Weight</b>   | 0.191 kg   |
| <b>Main circuit</b>   |  |
| <b>number of poles for main current circuit</b>   | 1  |
| <b>number of NO contacts for main contacts</b>  | 1  |
| <b>number of NC contacts for main contacts</b>  | 0  |
| <b>type of voltage of the operating voltage</b>   | AC   |
| <b>operating voltage</b>  |  |

|  |  |
|--|--|
| <ul style="list-style-type: none"> <li>• at AC <ul style="list-style-type: none"> <li>— at 50 Hz rated value</li> <li>— at 60 Hz rated value</li> </ul> </li> </ul>  | 48 ... 460 V<br>48 ... 460 V   |
| <b>operating frequency rated value</b>   | 50 ... 60 Hz   |
| <b>operating range relative to the operating voltage at AC</b> <ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>  | 40 ... 506 V<br>40 ... 506 V   |
| <b>operational current</b> <ul style="list-style-type: none"> <li>• at AC-1 at 400 V rated value</li> <li>• at AC-51 rated value</li> <li>• at AC-51 according to IEC 60947-4-3</li> <li>• according to UL 508 rated value</li> </ul>  | 20 A<br>20 A<br>13.2 A<br>17.6 A   |
| <b>operational current minimum</b>   | 500 mA   |
| <b>rate of voltage rise at the thyristor for main contacts maximum permissible</b>   | 1 000 V/μs   |
| <b>blocking voltage at the thyristor for main contacts maximum permissible</b>   | 1 200 V  |
| <b>reverse current of the thyristor</b>  | 10 mA  |
| <b>derating temperature</b>  | 40 °C  |
| <b>surge current resistance rated value</b>  | 600 A  |
| <b>I<sup>2</sup>t value maximum</b>  | 1 800 A <sup>2</sup> ·s  |
| <b>Control circuit/ Control</b>  |  |
| <b>type of voltage of the control supply voltage</b>   | AC/DC  |
| <b>control supply voltage 1 at AC</b> <ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>   | 24 V<br>24 V   |
| <b>control supply voltage at AC</b> <ul style="list-style-type: none"> <li>• at 50 Hz full-scale value for signal&lt;0&gt; recognition</li> <li>• at 60 Hz full-scale value for signal&lt;0&gt; recognition</li> <li>• initial value for signal &lt;1&gt; detection</li> </ul> | 5 V<br>5 V<br>14 V   |
| <b>control supply voltage frequency</b> <ul style="list-style-type: none"> <li>• 1 rated value</li> <li>• 2 rated value</li> </ul>   | 50 Hz<br>60 Hz   |
| <b>control supply voltage 1 at DC rated value maximum permissible</b>  | 30 V   |
| <b>control supply voltage 1 at DC</b>  | 15 ... 24 V  |
| <b>control supply voltage at DC</b> <ul style="list-style-type: none"> <li>• initial value for signal &lt;1&gt; detection</li> <li>• full-scale value for signal&lt;0&gt; recognition</li> </ul>   | 15 V<br>5 V  |
| <b>symmetrical line frequency tolerance</b>  | 5 Hz   |
| <b>control current at minimum control supply voltage</b> <ul style="list-style-type: none"> <li>• at AC</li> </ul>   | 2 mA   |
| control current at AC rated value  | 15 mA  |
| control current at DC rated value  | 20 mA  |
| <b>ON-delay time</b>   | 1 ms; additionally max. one half-wave  |
| <b>OFF-delay time</b>  | 15 ms; additionally max. one half-wave   |
| <b>Installation/ mounting/ dimensions</b>  |  |
| fastening method side-by-side mounting   | Yes  |
| <b>fastening method</b>  | screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715 |
| <b>design of the thread of the screw for securing the equipment</b>  | M4   |
| <b>height</b>  | 95 mm  |
| <b>width</b>   | 22.5 mm  |
| <b>depth</b>   | 120 mm   |
| <b>Connections/ Terminals</b>  |  |
| <b>product component removable terminal for auxiliary and control circuit</b>  | Yes  |
| <b>type of electrical connection</b> <ul style="list-style-type: none"> <li>• for main current circuit</li> </ul>  | screw-type terminals   |

|   |  |
|---|--|
| <ul style="list-style-type: none"> <li>• for auxiliary and control circuit</li> </ul>   | screw-type terminals   |
| <b>type of connectable conductor cross-sections</b> <ul style="list-style-type: none"> <li>• for main contacts <ul style="list-style-type: none"> <li>— solid</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>• for AWG cables for main contacts</li> </ul>  | 2x (1.5 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 6 mm <sup>2</sup> )<br>2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup><br>2x (14 ... 10)  |
| <b>connectable conductor cross-section for main contacts</b> <ul style="list-style-type: none"> <li>• solid or stranded</li> <li>• finely stranded with core end processing</li> </ul>  | 1.5 ... 6 mm <sup>2</sup><br>1 ... 10 mm <sup>2</sup>  |
| <b>type of connectable conductor cross-sections</b> <ul style="list-style-type: none"> <li>• for auxiliary and control contacts <ul style="list-style-type: none"> <li>— solid</li> <li>— finely stranded with core end processing</li> <li>— finely stranded without core end processing</li> </ul> </li> <li>• for AWG cables for auxiliary and control contacts</li> </ul> | 1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1 mm <sup>2</sup> )<br>1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1 mm <sup>2</sup> )<br>1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1 mm <sup>2</sup> )<br>1x (20 ... 12) |
| <b>AWG number as coded connectable conductor cross section for main contacts</b>  | 10 ... 14  |
| <b>tightening torque</b> <ul style="list-style-type: none"> <li>• for main contacts with screw-type terminals</li> <li>• for auxiliary and control contacts with screw-type terminals</li> </ul>  | 2 ... 2.5 N·m<br>0.5 ... 0.6 N·m   |
| <b>tightening torque [lbf·in]</b> <ul style="list-style-type: none"> <li>• for main contacts with screw-type terminals</li> <li>• for auxiliary and control contacts with screw-type terminals</li> </ul>   | 18 ... 22 lbf·in<br>4.5 ... 5.3 lbf·in   |
| <b>design of the thread of the connection screw</b> <ul style="list-style-type: none"> <li>• for main contacts</li> <li>• of the auxiliary and control contacts</li> </ul>  | M4<br>M3   |
| <b>stripped length of the cable</b> <ul style="list-style-type: none"> <li>• for main contacts</li> <li>• for auxiliary and control contacts</li> </ul>   | 10 mm<br>7 mm  |
| <b>UL/CSA ratings</b>   |  |
| <b>operational current according to UL 508 rated value</b>  | 17.6 A   |
| Electrical Safety   |  |
| <b>touch protection on the front according to IEC 60529</b>   | finger-safe, for vertical contact from the front   |
| <b>Ambient conditions</b>   |  |
| installation altitude at height above sea level maximum   | 1 000 m  |
| <b>ambient temperature</b> <ul style="list-style-type: none"> <li>• during operation</li> <li>• during storage</li> </ul>   | -25 ... +60 °C<br>-55 ... +80 °C   |
| <b>Electromagnetic compatibility</b>  |  |
| <b>conducted interference</b> <ul style="list-style-type: none"> <li>• due to burst according to IEC 61000-4-4</li> <li>• due to conductor-earth surge according to IEC 61000-4-5</li> <li>• due to conductor-conductor surge according to IEC 61000-4-5</li> <li>• due to high-frequency radiation according to IEC 61000-4-6</li> </ul>                                     | 2 kV / 5 kHz, behavior criterion 2<br>2 kV, behavior criterion 2<br>1 kV, behavior criterion 2<br>140 dBuV in the frequency range 0.15 ... 80 MHz, behavior criterion 1  |
| <b>field-based interference according to IEC 61000-4-3</b>  | 80 MHz ... 1 GHz 10 V/m, behavior criterion 1  |
| <b>electrostatic discharge according to IEC 61000-4-2</b>   | 4 kV contact discharging / 8 kV air discharging, behavior criterion 2  |
| <b>conducted HF interference emissions according to CISPR11</b>   | Class A for industrial environment   |
| <b>field-bound HF interference emission according to CISPR11</b>  | Class B for the domestic, business and commercial environments   |
| <b>Short-circuit protection, design of the fuse link</b>  |  |
| manufacturer's article number <ul style="list-style-type: none"> <li>• of gS fuse for semiconductor protection at NH design usable</li> <li>• of full range R fuse link for semiconductor protection at cylindrical design usable</li> <li>• of back-up R fuse link for semiconductor protection at NH design usable</li> </ul>   | <a href="#">3NE1814-0</a><br><a href="#">5SE1325</a><br><a href="#">3NE8015-1</a>  |

- of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable
- of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable
- of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable

[3NC1032](#)

[3NC1450](#)

[3NC2263](#)

manufacturer's article number of the gG fuse

- at NH design usable
- at cylindrical design 10 x 38 mm usable
- at cylindrical design 10 x 38 mm usable note
- at cylindrical design 14 x 51 mm usable
- at cylindrical design 14 x 51 mm usable note
- at cylindrical design 22 x 58 mm usable
- at cylindrical design 22 x 58 mm usable note

[3NA6807](#)

[3NW6005-1: These fuses have a smaller rated current than the semiconductor relays](#)

These fuses have a smaller rated current than the semiconductor relays

[3NW6105-1: These fuses have a smaller rated current than the semiconductor relays](#)

These fuses have a smaller rated current than the semiconductor relays

[3NW6205-1: These fuses have a smaller rated current than the semiconductor relays](#)

These fuses have a smaller rated current than the semiconductor relays

manufacturer's article number

- of DIAZED fuse usable
- of NEOZED fuse usable

[5SB2711](#)

[5SE2320](#)

### Approvals Certificates

| Environment                                 | General Product Approval  |   |   | other   |
|---|---|---|---|---|
| <a href="#">Environmental Confirmations</a> |  |  |  |  |
|   |   |   |   | <a href="#">Confirmation</a>  |
| <b>other</b>                                |   |   |   |   |
| <a href="#">Miscellaneous</a>               |   |   |   |   |

### Further information

**Information on the packaging**

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

**Information for data generation and storage**

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<https://www.siemens.com/ic10>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2320-1AA14>

**Cax online generator**




<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF2320-1AA14>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3RF2320-1AA14>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RF2320-1AA14&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RF2320-1AA14&lang=en)

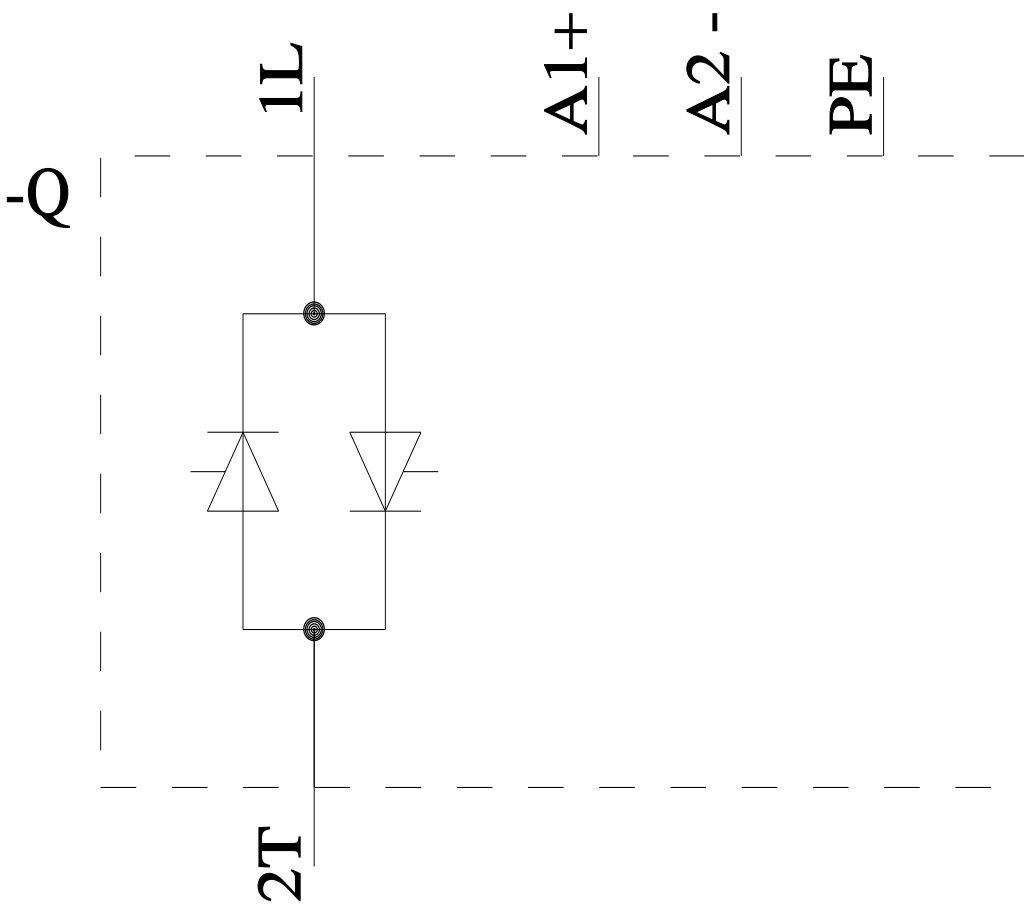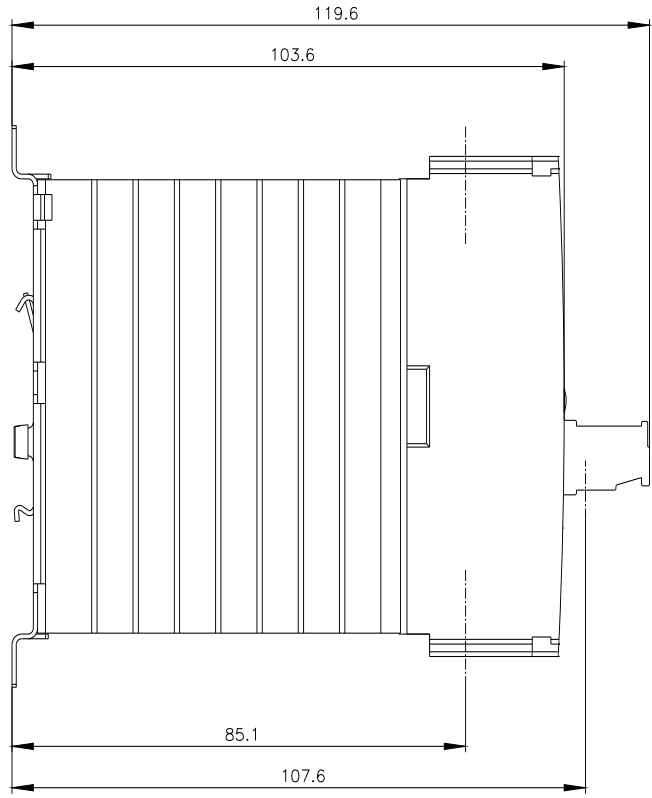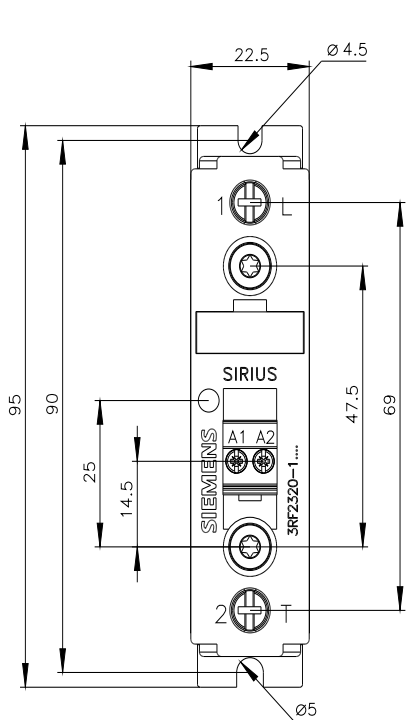



last modified:

4/4/2026