

Siemens  
EcoTech



semiconductor relay, 1-pole 3RF3 for use with heat sinks width 22.5 mm, 25 A 24-230 V / 4-30 V DC screw terminal



|                                                                                           |                                                                                                                                                       |
|-------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| product brand name                                                                        | SIRIUS                                                                                                                                                |
| product designation                                                                       | solid-state relay                                                                                                                                     |
| product type designation                                                                  | 3RF31                                                                                                                                                 |
| manufacturer's article number                                                             |                                                                                                                                                       |
| <ul style="list-style-type: none"><li>_1 of the accessories that can be ordered</li></ul> | <a href="#">3RF2900-3PA88</a>                                                                                                                         |
| <ul style="list-style-type: none"><li>_2 of the accessories that can be ordered</li></ul> | <a href="#">3RF3900-0WA88</a>                                                                                                                         |
| <ul style="list-style-type: none"><li>_3 of the accessories that can be ordered</li></ul> | <a href="#">3RF3920-0HA13</a>                                                                                                                         |
| <ul style="list-style-type: none"><li>_4 of the accessories that can be ordered</li></ul> | <a href="#">3RF3900-0EA18</a>                                                                                                                         |
| <ul style="list-style-type: none"><li>_5 of the accessories that can be ordered</li></ul> | <a href="#">3RF3920-0GA13</a>                                                                                                                         |
| <ul style="list-style-type: none"><li>_6 of the accessories that can be ordered</li></ul> | <a href="#">3RF3920-0FA08</a>                                                                                                                         |
| product designation                                                                       |                                                                                                                                                       |
| <ul style="list-style-type: none"><li>_1 of the accessories that can be ordered</li></ul> | terminal cover                                                                                                                                        |
| <ul style="list-style-type: none"><li>_2 of the accessories that can be ordered</li></ul> | heat conducting foil                                                                                                                                  |
| <ul style="list-style-type: none"><li>_3 of the accessories that can be ordered</li></ul> | power regulator                                                                                                                                       |
| <ul style="list-style-type: none"><li>_4 of the accessories that can be ordered</li></ul> | converter                                                                                                                                             |
| <ul style="list-style-type: none"><li>_5 of the accessories that can be ordered</li></ul> | load monitoring                                                                                                                                       |
| <ul style="list-style-type: none"><li>_6 of the accessories that can be ordered</li></ul> | basic load monitoring                                                                                                                                 |
| General technical data                                                                    |                                                                                                                                                       |
| product function                                                                          | zero-point switching                                                                                                                                  |
| power loss [V·A] maximum                                                                  | 30 VA                                                                                                                                                 |
| power loss [W] for rated value of the current                                             |                                                                                                                                                       |
| <ul style="list-style-type: none"><li>at AC in hot operating state</li></ul>              | 30 W                                                                                                                                                  |
| <ul style="list-style-type: none"><li>at AC in hot operating state per pole</li></ul>     | 30 W                                                                                                                                                  |
| <ul style="list-style-type: none"><li>without load current share typical</li></ul>        | 0.5 W                                                                                                                                                 |
| type of calculation of power loss current-dependent                                       | linear                                                                                                                                                |
| insulation voltage rated value                                                            | 600 V                                                                                                                                                 |
| surge voltage resistance of main circuit rated value                                      | 6 kV                                                                                                                                                  |
| protection class IP                                                                       | IP20                                                                                                                                                  |
| protection class IP on the front according to IEC 60529                                   | IP20                                                                                                                                                  |
| shock resistance according to IEC 60068-2-27                                              | 15 g / 11 ms                                                                                                                                          |
| vibration resistance according to IEC 60068-2-6                                           | 2 g                                                                                                                                                   |
| reference code according to IEC 81346-2                                                   | Q                                                                                                                                                     |
| Substance Prohibitance (day/month/year)                                                   | 01/15/2024                                                                                                                                            |
| SVHC substance name                                                                       | Lead CAS-No. 7439-92-1<br>Lead monoxide (lead oxide) CAS-No. 1317-36-8<br>2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one CAS-No. 71868-10-5 |

|                                                                                    |                                       |
|------------------------------------------------------------------------------------|---------------------------------------|
|                                                                                    | Melamine CAS-No. 108-78-1             |
| <b>Net Weight</b>                                                                  | 0.066 kg                              |
| <b>Main circuit</b>                                                                |                                       |
| <b>number of poles for main current circuit</b>                                    | 1                                     |
| <b>number of NO contacts for main contacts</b>                                     | 1                                     |
| <b>number of NC contacts for main contacts</b>                                     | 0                                     |
| <b>type of voltage of the operating voltage</b>                                    | AC                                    |
| <b>operating voltage</b>                                                           |                                       |
| • at AC                                                                            |                                       |
| — at 50 Hz rated value                                                             | 24 ... 230 V                          |
| — at 60 Hz rated value                                                             | 24 ... 230 V                          |
| <b>operating frequency rated value</b>                                             | 50 ... 60 Hz                          |
| <b>relative symmetrical tolerance of the operating frequency</b>                   | 10 %                                  |
| <b>operating range relative to the operating voltage at AC</b>                     |                                       |
| • at 50 Hz                                                                         | 20 ... 253 V                          |
| • at 60 Hz                                                                         | 20 ... 253 V                          |
| <b>operational current rated value maximum</b>                                     | 25 A                                  |
| <b>operational current</b>                                                         |                                       |
| • at AC-1 at 400 V rated value                                                     | 25 A                                  |
| • at AC-51 rated value                                                             | 25 A                                  |
| • at AC-51 according to IEC 60947-4-3                                              | 25 A                                  |
| • according to UL 508 rated value                                                  | 25 A                                  |
| <b>ampacity maximum</b>                                                            | 25 A                                  |
| <b>operational current minimum</b>                                                 | 100 mA                                |
| <b>rate of voltage rise at the thyristor for main contacts maximum permissible</b> | 1 000 V/μs                            |
| <b>blocking voltage at the thyristor for main contacts maximum permissible</b>     | 800 V                                 |
| <b>reverse current of the thyristor</b>                                            | 10 mA                                 |
| <b>derating temperature</b>                                                        | 40 °C                                 |
| <b>surge current resistance rated value</b>                                        | 260 A                                 |
| <b>I<sup>2</sup>t value maximum</b>                                                | 360 A <sup>2</sup> ·s                 |
| <b>Control circuit/ Control</b>                                                    |                                       |
| <b>type of voltage of the control supply voltage</b>                               | DC                                    |
| <b>control supply voltage at DC</b>                                                | 4 ... 30 V                            |
| <b>control supply voltage 1 at DC</b>                                              | 4 ... 30 V                            |
| <b>control supply voltage at DC</b>                                                |                                       |
| • initial value for signal <1> detection                                           | 4 V                                   |
| • full-scale value for signal<0> recognition                                       | 1 V                                   |
| <b>operating range factor control supply voltage rated value at DC</b>             |                                       |
| • initial value                                                                    | 0.17                                  |
| • full-scale value                                                                 | 1.25                                  |
| <b>control current at minimum control supply voltage</b>                           |                                       |
| • at DC                                                                            | 13 mA                                 |
| <b>control current at DC rated value</b>                                           | 15 mA                                 |
| <b>ON-delay time</b>                                                               | 1 ms; additionally max. one half-wave |
| <b>OFF-delay time</b>                                                              | 1 ms; additionally max. one half-wave |
| <b>Installation/ mounting/ dimensions</b>                                          |                                       |
| <b>fastening method side-by-side mounting</b>                                      | Yes                                   |
| <b>fastening method</b>                                                            | screw fixing                          |
| <b>design of the thread of the screw for securing the equipment</b>                | M4                                    |
| <b>tightening torque of fixing screw maximum</b>                                   | 1.5 N·m                               |
| <b>tightening torque [lbf·in] of fixing screw maximum</b>                          | 13 lbf·in                             |
| <b>height</b>                                                                      | 85 mm                                 |
| <b>width</b>                                                                       | 22.5 mm                               |
| <b>depth</b>                                                                       | 48 mm                                 |
| <b>Connections/ Terminals</b>                                                      |                                       |
| <b>product component removable terminal for auxiliary and</b>                      | Yes                                   |

|                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>control circuit</b>                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                  |
| <b>type of electrical connection</b>                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                  |
| <ul style="list-style-type: none"> <li>• for main current circuit</li> <li>• for auxiliary and control circuit</li> </ul>                                                                                                                                                                                                               | screw-type terminals<br>screw-type terminals                                                                                                                                                                                     |
| <b>type of connectable conductor cross-sections</b>                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                  |
| <ul style="list-style-type: none"> <li>• for main contacts               <ul style="list-style-type: none"> <li>— solid</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>• for AWG cables for main contacts</li> </ul>                                                                                          | 2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 6 mm <sup>2</sup> )<br>2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup><br>2x (14 ... 10), 1x 8                                              |
| <b>connectable conductor cross-section for main contacts</b>                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                  |
| <ul style="list-style-type: none"> <li>• solid or stranded</li> <li>• finely stranded with core end processing</li> </ul>                                                                                                                                                                                                               | 1.5 ... 6 mm <sup>2</sup><br>1 ... 10 mm <sup>2</sup>                                                                                                                                                                            |
| <b>type of connectable conductor cross-sections</b>                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                  |
| <ul style="list-style-type: none"> <li>• for auxiliary and control contacts               <ul style="list-style-type: none"> <li>— solid</li> <li>— finely stranded with core end processing</li> <li>— finely stranded without core end processing</li> </ul> </li> <li>• for AWG cables for auxiliary and control contacts</li> </ul> | 1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1 mm <sup>2</sup> )<br>1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1 mm <sup>2</sup> )<br>1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1 mm <sup>2</sup> )<br>1x (20 ... 12) |
| <b>AWG number as coded connectable conductor cross section for main contacts</b>                                                                                                                                                                                                                                                        | 14 ... 8                                                                                                                                                                                                                         |
| <b>tightening torque</b>                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                  |
| <ul style="list-style-type: none"> <li>• for main contacts with screw-type terminals</li> <li>• for auxiliary and control contacts with screw-type terminals</li> </ul>                                                                                                                                                                 | 2 ... 2.5 N·m<br>0.5 ... 0.6 N·m                                                                                                                                                                                                 |
| <b>tightening torque [lbf·in]</b>                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                  |
| <ul style="list-style-type: none"> <li>• for main contacts with screw-type terminals</li> <li>• for auxiliary and control contacts with screw-type terminals</li> </ul>                                                                                                                                                                 | 18 ... 22 lbf·in<br>4.5 ... 5.3 lbf·in                                                                                                                                                                                           |
| <b>design of the thread of the connection screw</b>                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                  |
| <ul style="list-style-type: none"> <li>• for main contacts</li> <li>• of the auxiliary and control contacts</li> </ul>                                                                                                                                                                                                                  | M4<br>M3                                                                                                                                                                                                                         |
| <b>stripped length of the cable</b>                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                  |
| <ul style="list-style-type: none"> <li>• for main contacts</li> <li>• for auxiliary and control contacts</li> </ul>                                                                                                                                                                                                                     | 10 mm<br>7 mm                                                                                                                                                                                                                    |
| <b>UL/CSA ratings</b>                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                  |
| <b>operational current according to UL 508 rated value</b>                                                                                                                                                                                                                                                                              | 25 A                                                                                                                                                                                                                             |
| <b>Electrical Safety</b>                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                  |
| <b>touch protection on the front according to IEC 60529</b>                                                                                                                                                                                                                                                                             | finger-safe, for vertical contact from the front                                                                                                                                                                                 |
| <b>Ambient conditions</b>                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                  |
| installation altitude at height above sea level maximum                                                                                                                                                                                                                                                                                 | 1 000 m                                                                                                                                                                                                                          |
| <b>ambient temperature</b>                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                  |
| <ul style="list-style-type: none"> <li>• during operation</li> <li>• during storage</li> </ul>                                                                                                                                                                                                                                          | -25 ... +60 °C<br>-55 ... +80 °C                                                                                                                                                                                                 |
| <b>Electromagnetic compatibility</b>                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                  |
| <b>conducted interference</b>                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                  |
| <ul style="list-style-type: none"> <li>• due to burst according to IEC 61000-4-4</li> <li>• due to conductor-earth surge according to IEC 61000-4-5</li> <li>• due to conductor-conductor surge according to IEC 61000-4-5</li> <li>• due to high-frequency radiation according to IEC 61000-4-6</li> </ul>                             | 2 kV / 5 kHz, behavior criterion 2<br>2 kV, behavior criterion 2<br>1 kV, behavior criterion 2<br>140 dBuV in the frequency range 0.15 ... 80 MHz, behavior criterion 1                                                          |
| <b>field-based interference according to IEC 61000-4-3</b>                                                                                                                                                                                                                                                                              | 80 MHz ... 1 GHz 10 V/m, behavior criterion 1                                                                                                                                                                                    |
| <b>electrostatic discharge according to IEC 61000-4-2</b>                                                                                                                                                                                                                                                                               | 4 kV contact discharging / 8 kV air discharging, behavior criterion 2                                                                                                                                                            |
| <b>conducted HF interference emissions according to CISPR11</b>                                                                                                                                                                                                                                                                         | Class A for industrial environment                                                                                                                                                                                               |
| <b>field-bound HF interference emission according to CISPR11</b>                                                                                                                                                                                                                                                                        | Class B for the domestic, business and commercial environments                                                                                                                                                                   |
| <b>Short-circuit protection, design of the fuse link</b>                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                  |
| manufacturer's article number                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                  |
| <ul style="list-style-type: none"> <li>• of gS fuse for semiconductor protection at NH design usable</li> <li>• of full range R fuse link for semiconductor protection at</li> </ul>                                                                                                                                                    | <a href="#">3NE1815-0</a><br><a href="#">5SE1325</a>                                                                                                                                                                             |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| cylindrical design usable <ul style="list-style-type: none"> <li>• of back-up R fuse link for semiconductor protection at NH design usable</li> <li>• of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable</li> <li>• of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable</li> <li>• of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable</li> </ul>                | <a href="#">3NE8015-1</a><br><br><a href="#">3NC1020: These fuses have a smaller rated current than the semiconductor relays</a><br><a href="#">3NC1430</a><br><br><a href="#">3NC2225</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| manufacturer's article number of the gG fuse <ul style="list-style-type: none"> <li>• at NH design usable</li> <li>• at NH design usable note</li> <li>• at cylindrical design 10 x 38 mm usable</li> <li>• at cylindrical design 10 x 38 mm usable note</li> <li>• at cylindrical design 14 x 51 mm usable</li> <li>• at cylindrical design 14 x 51 mm usable note</li> <li>• at cylindrical design 22 x 58 mm usable</li> <li>• at cylindrical design 22 x 58 mm usable note</li> </ul> | <a href="#">3NA6803: These fuses have a smaller rated current than the semiconductor relays</a><br>These fuses have a smaller rated current than the semiconductor relays<br><a href="#">3NW6001-1: These fuses have a smaller rated current than the semiconductor relays</a><br>These fuses have a smaller rated current than the semiconductor relays<br><a href="#">3NW6101-1: These fuses have a smaller rated current than the semiconductor relays</a><br>These fuses have a smaller rated current than the semiconductor relays<br><a href="#">3NW6208-1: These fuses have a smaller rated current than the semiconductor relays</a><br>These fuses have a smaller rated current than the semiconductor relays |
| manufacturer's article number <ul style="list-style-type: none"> <li>• of DIAZED fuse usable</li> <li>• of DIAZED fuse usable note</li> <li>• of NEOZED fuse usable</li> </ul>                                                                                                                                                                                                                                                                                                            | <a href="#">5SB251: These fuses have a smaller rated current than the semiconductor relays</a><br>These fuses have a smaller rated current than the semiconductor relays<br><a href="#">5SE2310: These fuses have a smaller rated current than the semiconductor relays</a>                                                                                                                                                                                                                                                                                                                                                                                                                                            |

#### Approvals Certificates

| Environment                                                                         |                                                                                     | General Product Approval                                                            |                                                                                     |                                                                                       |                                                                                       |  |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|--|
| <a href="#">Environmental Confirmations</a>                                         |  |  |  |  |  |  |
| EMV                                                                                 | Test Certificates                                                                   | other                                                                               |                                                                                     |                                                                                       |                                                                                       |  |
|  | <a href="#">Type Test Certificates/Test Report</a>                                  | <a href="#">Confirmation</a>                                                        |  | <a href="#">Confirmation</a>                                                          |                                                                                       |  |

#### Further information

##### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

##### Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

##### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF3125-1AA42>

##### Cax online generator



<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF3125-1AA42>


##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RF3125-1AA42>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RF3125-1AA42&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RF3125-1AA42&lang=en)

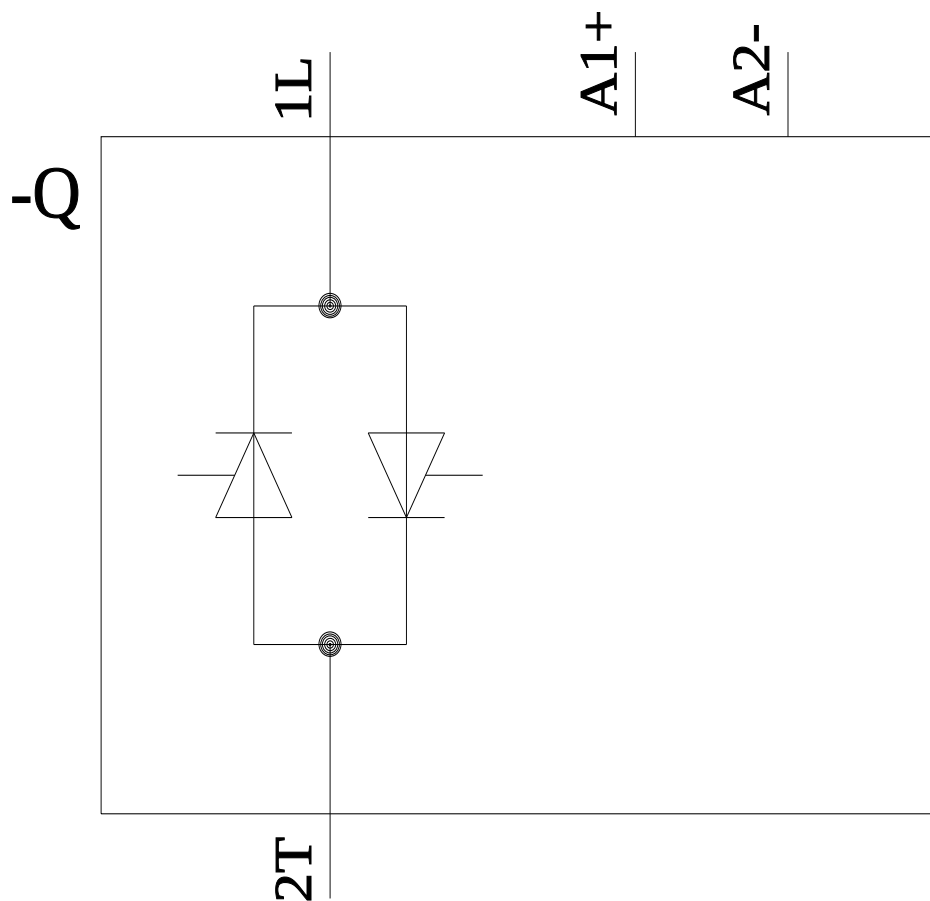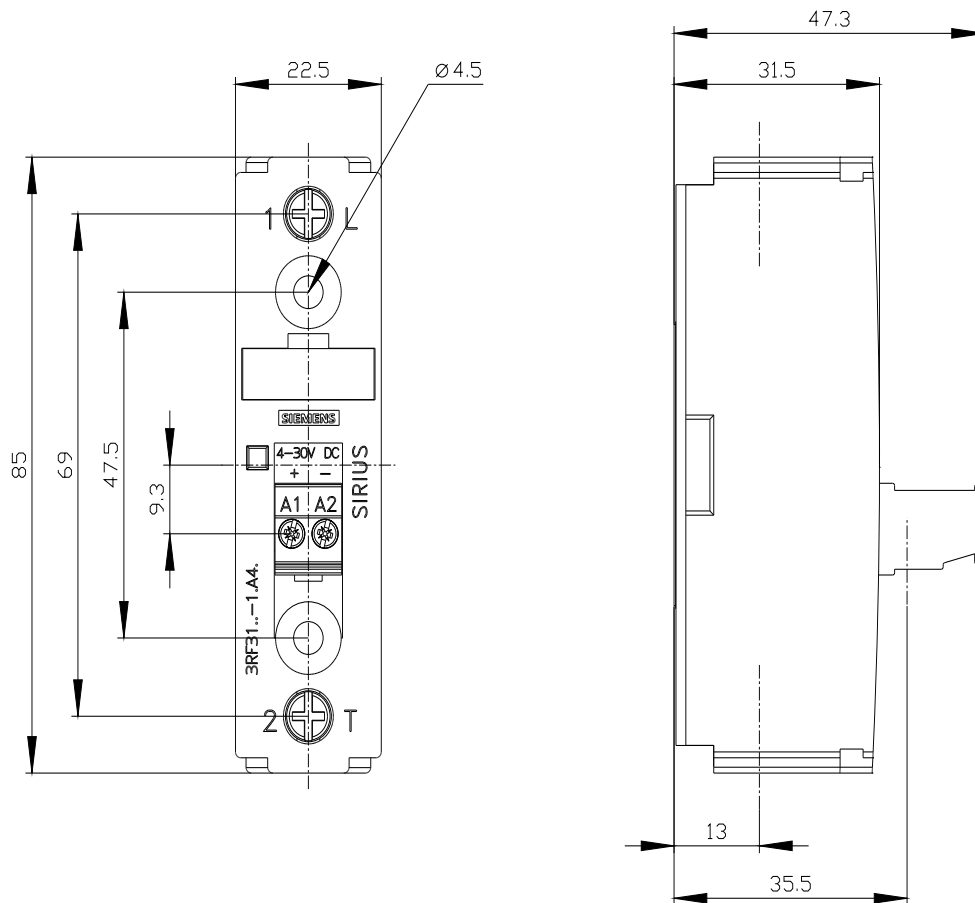

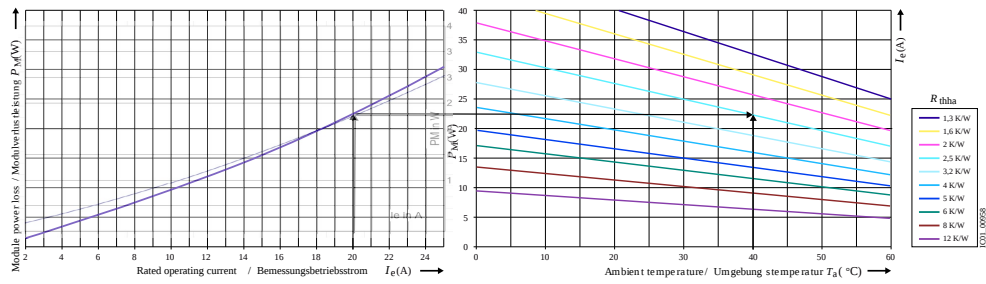

last modified:

4/21/2026