

**EOL - Modlink MSDD-set: Frame 4000-68112-0000000,**

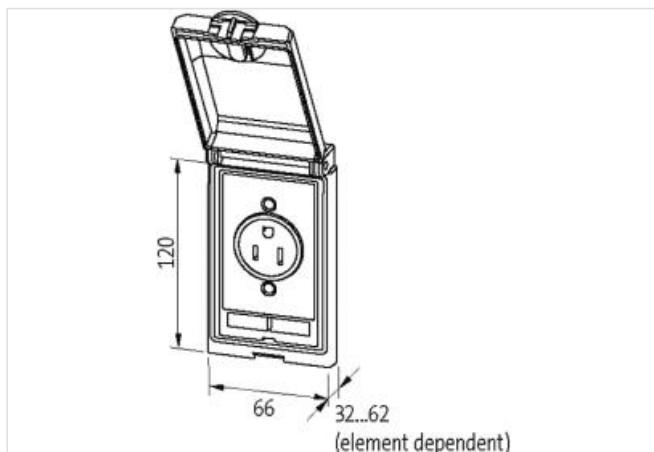
discontinued - End of Life Date: 2024-12-31

Art.No.: 4000-68112-1600000

Weight: 0.334 kg

Country of origin: DE

Model designation: X MSDD\_1SW\_25B/S+RJ45\_

[Link to Product](#)
**Illustration**


Product may differ from Image


**Commercial data**

ECCLASS-6.0	27189217
ECCLASS-6.1	27189217
ECCLASS-7.0	27189217
ECCLASS-8.0	27189217
ECCLASS-9.0	27182806
ECCLASS-10.1	27182806

The information in this Product-PDF has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-01-17

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

ECCLASS-11.1	27182806
ECCLASS-12.0	27182806
ETIM-5.0	EC002625
ETIM-6.0	EC002625
ETIM-7.0	EC002625
ETIM-8.0	EC002625
customs tariff number	85366990
EAN	4048879036405
Packaging unit	1
<b>Frame</b>	
Degree of protection (EN IEC 60529)	IP65
Operating temperature min.	-10 °C
Operating temperature max.	60 °C
Storage temperature min.	-25 °C
Storage temperature max.	60 °C
Suitable for installation wall thickness min.	1 mm
Suitable for installation wall thickness max.	5 mm
Material housing	Fine zinc die casting
Coating housing	KT
<b>Shielding plate</b>	
Connection information	Threaded hole M4
Tightening torque	0,9 Nm
<b>SUB-D25</b>	
Operating voltage AC	48 V
Operating voltage DC	48 V
Operating voltage AC max. (UL-listed)	30 V
Operating voltage DC max. (UL-listed)	42,4 V
Operating current	3 A
Current operating max. (UL)	175 mA
Family construction form	SUB-D25
Family type Back side	SUB-D25
Gender	female
Gender Rear	male
Looking techniques	Standard UNC 4-40 screw thread bolt (EN 60807)
No. of poles	25
<b>RJ45</b>	
Operating voltage AC max. (UL-listed)	30 V
Operating voltage DC max. (UL-listed)	42,4 V
Current operating max. (UL)	175 mA
Family construction form	RJ45
Family type Back side	RJ45
Cable category min.	Cat5e
Looking techniques	Snap-in connector

