



EPIC® CEE Plugs & Connectors

North American Standard: 100 Amps; International Standard: 125 Amps

EPIC® CEE Straight Plug with Cable Gland (IP67)

EPIC® CEE Straight Connector with Cable Gland (IP67)





Number of Wires	A (inches)	A (mm)	B (inches)	B (mm)	C
100 Amps / 125 Amps					
3, 4, 5	11.14	283	4.96	126	NPT 2"

Number of Wires	A (inches)	A (mm)	B (inches)	B (mm)	C (inches)	C (mm)	D (inches)	D (mm)	E
100 Amps / 125 Amps									
3, 4, 5	19.02	483	11.42	290	5.12	130	6.61	168	NPT 2"

EPIC® CEE Inlets

North American Standard: 100 Amps; International Standard: 125 Amps

EPIC® CEE Straight Inlet (IP67)



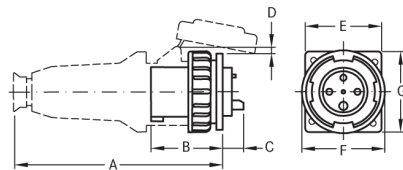


Number of Wires	A (inches)	A (mm)	B (inches)	B (mm)	C (inches)	C (mm)	D (inches)	D (mm)	E (inches)	E (mm)	F (inches)	F (mm)	G (inches)	G (mm)	M (inches)	M (mm)	N (inches)	N (mm)	Ø (inches)	Ø (mm)
100 Amps / 125 Amps																				
3, 4, 5	13.98	355	4.65	118	2.64	67	0.39	10	4.49	114	4.96	126	4.49	114	3.54	90	3.54	90	3.90	99

EPIC® CEE Panel Mount Receptacles

North American Standard: 100 Amps; International Standard: 125 Amps

EPIC® CEE Straight Panel Mount Receptacle (IP67)

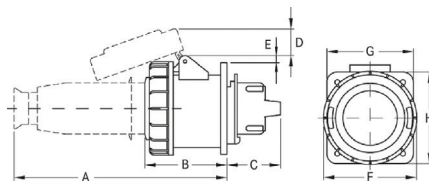

Number of Wires	A (inches)	A (mm)	B (inches)	B (mm)	C (inches)	C (mm)	D (inches)	D (mm)	E (inches)	E (mm)	F (inches)	F (mm)	G (inches)	G (mm)	H (inches)	H (mm)
100 Amps / 125 Amps																
3, 4, 5	13.78	350	4.45	113	3.07	78	1.50	38	0.39	10	4.96	126	4.49	114	4.49	114

Number of Wires	M (inches)	M (mm)	N (inches)	N (mm)	Ø (inches)	Ø (mm)
100 Amps / 125 Amps						
3, 4, 5	3.54	90	3.54	90	3.86	98





Photographs are not to scale and are not true representations of the products in question.

For current information go to our website. If not otherwise specified, all values relating to the product are nominal values.

EPIC® CEE Panel Mount Receptacles

North American Standard: 100 Amps; International Standard: 125 Amps

EPIC® CEE Angled Panel Mount Receptacle (IP67)



Number of Wires	A (inches) (mm)	B (inches) (mm)	C (inches) (mm)	D (inches) (mm)	E (inches) (mm)	F (inches) (mm)	G (inches) (mm)	H (inches) (mm)	L (inches) (mm)
100 Amps / 125 Amps									
3, 4, 5	12.60 320	3.98 101	3.23 82	1.38 35	0.79 20	4.49 114	5.03 128	4.49 114	0.31 8

Number of Wires	I (inches) (mm)	M (inches) (mm)	N (inches) (mm)	Ø (inches) (mm)
100 Amps / 125 Amps				
3, 4, 5	3.54 90	1.69 43	1.85 47	3.78 96

Watertight Covers for Plugs & Inlets (IP67)

Amps	Plug Type	Part Number
20/16	2+PE	476903
20/16	3+PE	476913
20/16	3+N+PE	476923
30/32	2+PE	476905
30/32	3+PE	476905
30/32	3+N+PE	476925
60/63	all	476907
100/125	all	476909

EPIC® Pin & Sleeve Accessories

Long Thread Plastic Cable Gland for EPIC® ULYSSE Outlets



Description	Cable Outer Diameter (inches) (mm)	Thread Size	Thread Length (inches) (mm)	Part Number
Gland	0.70 - 0.98 18 - 25	PG 29	0.59 15	571129
Lock nut	—	PG 29	—	571229

Flanges with Cable Glands for EPIC® ALUPRES Outlets

Window Size (Amps)	Cable Outer Diameter (inches) (mm)		Thread Type	Part Number
F0 Flat Flanges				
20/16	0.35 - 0.47	9 - 12	NPT ½"	541080FX*
20/16	0.47 - 0.63	12 - 16	NPT ¾"	541090FX**
20/16	0.67 - 0.79	17 - 20	NPT 1"	541030FX
F1 Flat Flanges				
30/32, 60/63	0.35 - 0.47	9 - 12	NPT ½"	541011FX
30/32, 60/63	0.55 - 0.63	14 - 16	NPT ¾"	541021FX
F1 Raised Flanges				
30/32, 60/63	0.63 - 0.87	16 - 22	NPT 1"	540151FX
30/32, 60/63	0.98 - 1.02	25 - 26	NPT 1¼"	540141FX

Raised Flange



Flat Flange



* Supplied with 20/16A EPIC® ALUPRES: 2+PE, 3+PE

** Supplied with 20/16A EPIC® ALUPRES: 3+N+PE

Fuses for EPIC® ULYSSE Outlets

Switch Outlet Rating (A)	Fuse Size A x B (mm)	Fuse Current (A)	Fuse Voltage Rating (V)
20/16	10 x 38	0.5 - 32	500
30/32	14 x 51	2 - 50	500
63	22 x 58	16 - 100	500

EPIC® ULYSSE switched-socket outlets use standard IEC-60269 cylindrical fuses. Fuse selection is application-specific and typically based on providing short circuit line protection (gL-gG fast-acting type) or motor protection (aM slow-acting type). Consult with a fuse manufacturer for proper selection and to place an order. Lapp does not carry fuses. The table here shows general fuse information for each EPIC® ULYSSE outlet size. Order one fuse for each outlet pole.

Example: P/N 400139FX (250V, 20A, 3+PE outlet) requires three 10 x 38 fuses.

Photographs are not to scale and are not true representations of the products in question.

For current information go to our website. If not otherwise specified, all values relating to the product are nominal values.