



WLS15 LED Strip Light Product Manual

Original Instructions

p/n: 197493 Rev. I

03-Nov-25

© Banner Engineering Corp. All rights reserved. www.bannerengineering.com

Contents

Chapter 1 Features	3
Single Color Models	4
Dual Color Models	4
Chapter 2 Wiring	5
Chapter 3 Specifications	6
Dimensions	7
Optical Data	7
Chapter 4 Accessories	10
Cordsets	10
Single Color Only Cordsets	12
Mounting Accessories	12
Power Supplies	13
Chapter 5 Product Support and Maintenance	14
Clean with Mild Detergent and Warm Water	14
Repairs	14
Contact Us	14
Banner Engineering Corp Limited Warranty	14
Mexican Importer	14

Chapter Contents

Single Color Models	4
Dual Color Models	4

Chapter 1

Features

Banner's WLS15 LED Strip Lights have sturdy aluminum inner frames, encased in shatter-resistant, UV-stabilized, polycarbonate shells, making them ideal for indoor and outdoor applications.

- Low-profile, space-saving design
- Rugged, water-resistant design
- Available in six lengths from 220 mm to 1200 mm
- Daisy-chain power to multiple lights
- Optional snap clips for easy installation and repositioning
- Capability to dim lights using PWM input
- Operates on 12 V DC or 24 V DC in one model
- Models are available with two colors in one device



These strip lights are available as either stand-alone models, or as cascade models that can be connected in series or "daisy-chained" together for longer lighting runs, with a minimum of wiring.

Stand-alone models have one end for power connection and no connections at opposite end. A stand-alone model may be used as the last in the cascade series.

Cascade models have one end for power connection, and a connection at the opposite end for connecting to other lights in the cascade. A double-ended accessory cordset may be used between each pair of lights in a cascade to extend the distance between lights.



For PWM dimming, use with the LC65P2T 2-wire dimmer module. For more information, refer to the LC65 LED Dimmer Module datasheet, p/n [177086](#). This module can only be used with the single color models.

IMPORTANT: Read the following instructions before operating the light. Please download the complete WLS15 LED Strip Light technical documentation, available in multiple languages, from www.bannerengineering.com for details on the proper use, applications, Warnings, and installation instructions of this device.

IMPORTANT: Lea el siguiente instructivo antes de operar el luminario. Por favor descargue desde www.bannerengineering.com toda la documentación técnica de los WLS15 LED Strip Light, disponibles en múltiples idiomas, para detalles del uso adecuado, aplicaciones, advertencias, y las instrucciones de instalación de estos dispositivos.

IMPORTANT: Lisez les instructions suivantes avant d'utiliser le luminaire. Veuillez télécharger la documentation technique complète des WLS15 LED Strip Light sur notre site www.bannerengineering.com pour les détails sur leur utilisation correcte, les applications, les notes de sécurité et les instructions de montage.

Single Color Models

Model Key

Family	Cascadable	Color	Length	Window	Construction	Connector ⁽¹⁾
WLS15	C	DW	0360	D	S	C2
						C2 = 2 m (6.5 ft) integral PVC cable
			0220 mm (6 in)			C4 = 4 m (13 ft) integral PVC cable
			0360 mm (1 ft)			C5 = 5 m (16.4 ft) integral PVC cable
			0500 mm (1.5 ft)			C30 = 9 m (30 ft) integral PVC cable
			0640 mm (2 ft)			QP = 150 mm (5.9 in) PVC cable with M12 quick-disconnect connector
			0920 mm (3 ft)			QS = 150 mm (5.9 in) PVC cable with Deutsch DTM connector
			1200 mm (4 ft)			
	C = Cascadable X = Non-cascadable	DW = Daylight white WW = Warm white		D = Diffuse	S = Sealed (IP66, IP67)	

Dual Color Models

Model Key

Family	Cascadable	Color 1	Color 2	Length	Window	Construction	Connector ⁽²⁾
WLS15	C	W	R	0360	D	S	C2
							C2 = 2 m (6.5 ft) integral PVC cable
				0220 mm (6 in)			C4 = 4 m (13 ft) integral PVC cable
				0360 mm (1 ft)			C5 = 5 m (16.4 ft) integral PVC cable
				0500 mm (1.5 ft)			C30 = 9 m (30 ft) integral PVC cable
				0640 mm (2 ft)			QP = 150 mm (5.9 in) PVC cable with M12 quick-disconnect connector
				0920 mm (3 ft)			QS = 150 mm (5.9 in) PVC cable with Deutsch DTM connector
				1200 mm (4 ft)			
	C = Cascadable X = Non-cascadable	W = Daylight white B = Blue G = Green R = Red Y = Yellow A = Amber			D = Diffuse	S = Sealed (IP66, IP67)	

⁽¹⁾ Models with a quick-disconnect or Deutsch DTM connector require a mating cordset.


⁽²⁾ Models with a quick-disconnect connector require a mating cordset.

Chapter Contents


Chapter 2

Wiring

QP Models

4-pin M12 Male Pinout	4-pin M12 Female Pinout	Pin	Wire Color	Single Color Models	Dual Color Models
		1	Brown	12 V DC or 24 V DC	Color 1: 12 V DC or 24 V DC
		2	White	Not used	Not used
		3	Blue	DC common	DC common
		4	Black	Not used	Color 2: 12 V DC or 24 V DC (color 2 overrides color 1)

QS Models: Single Color Models Only

2-pin Deutsch DTM Male Pinout	2-pin Deutsch DTM Female Pinout	Pin	Wire Color	Connection
		1	Brown	12 V DC or 24 V DC
		2	Blue	DC common

Chapter Contents

Dimensions.....	7
Optical Data.....	7

Chapter 3

Specifications

Supply Protection Circuitry

Protected against reverse polarity and transient voltages

Supply Voltage

12 V DC or 24 V DC nominal

Absolute operational limits of 10 V DC to 15 V DC and 20 V DC to 27 V DC

Use only with a suitable Class 2 power supply (UL) or a SELV power supply (CE)

Single Color Light Models can be PWM dimmed between 25% to 100% with a frequency up to 1000 Hz

See electrical characteristics on the product's label

Supply Current

Light Length	Typical Current (A) at 25°C (3)		Max. Current (A) at -40°C	
	12 V DC	24 V DC	12 V DC	24 V DC
0220 mm	0.19	0.1	0.24	0.12
0360 mm	0.38	0.2	0.48	0.24
0500 mm	0.57	0.3	0.72	0.36
0640 mm	0.76	0.4	0.96	0.48
0920 mm	1.14	0.6	1.44	0.72
1200 mm	1.52	0.8	1.92	0.96

Connections

2 m (6.5 ft) integral PVC-jacketed cable, 150 mm (6 in) PVC-jacketed cable with a 4-pin M12 quick-disconnect connector, or 150 mm (5.9 in) 2-pin Deutsch DTM series sealed cable; models with a quick-disconnect connector or Deutsch DTM connector require a mating cordset

Do not spray the cable with a high-pressure sprayer or cable damage will result.

Mounting

Integral mounting slots for M4 (#8) screws, tighten to 5 in·lbf max torque

Multiple bracket options available

Secure cables within 150 mm (5.9 inches) of the light

Construction

Clear anodized aluminum housing; Polycarbonate outer housing, Polyamide end caps

Environmental Rating

Rated IP66 and IP67

Suitable for wet locations per UL 2108

Vibration and Mechanical Shock

Vibration: 10 Hz to 55 Hz, 1.0 mm peak-to-peak amplitude per IEC 60068-2-6

Shock: 15G 11 ms duration, half sine wave per IEC 60068-2-27

(3) Typical current values are shown at 25 °C – current and lumen values decrease 0.4% per 1 °C from ambient. For example, a 1200 mm unit will have a maximum current of 1.92 A at -40 °C and 1.33 A at +60 °C.

Operating Temperature

-40 °C to +60 °C (-40 °F to +140 °F)

95% at +60 °C maximum relative humidity (non-condensing)

Storage Temperature

-40 °C to +70 °C (-40 °F to +158 °F)

Application Note

When connecting cascadable lights in series, it is important not to exceed maximum current limitations:

- Maximum length of light at 12 V DC: 2.4 m (7.9 ft)
- Maximum length of light at 24 V DC: 6 m (19.7 ft)

Light Characteristics

Color	Dominant Wavelength (nm) or Color Temperature	Lighted Length Lumens (Typical at 25°C) ⁽⁴⁾					
		220 mm	360 mm	500 mm	640 mm	920 mm	1200 mm
Daylight White	5000K (±300K)	175	350	525	700	1050	1400
Warm White	3000K (±200K, -100K)	170	340	510	680	1020	1360
Green	525 nm	105	210	315	420	630	840
Red	625 nm	55	110	165	220	330	440
Yellow	580 nm	165	330	495	660	990	1320
Blue	470 nm	25	50	75	100	150	200
Amber	590 nm	55	110	165	220	330	440

Certifications

Banner Engineering BV
Park Lane, Culliganlaan 2F bus 3
1831 Diegem, BELGIUM



(4) Values shown at 25 °C - current and lumen values decrease 0.4% per 1 °C from ambient. For example, a 1200 mm unit will have a maximum current of 1.92 A at -40 °C and 1.33 A at +60 °C.

Required Overcurrent Protection

WARNING: Electrical connections must be made by qualified personnel in accordance with local and national electrical codes and regulations.

Overcurrent protection is required to be provided by end product application per the supplied table.

Overcurrent protection may be provided with external fusing or via Current Limiting, Class 2 Power Supply.


Supply wiring leads < 24 AWG shall not be spliced.

For additional product support, go to www.bannerengineering.com.

Supply Wiring (AWG)	Required Overcurrent Protection (A)	Supply Wiring (AWG)	Required Overcurrent Protection (A)
20	5.0	26	1.0
22	3.0	28	0.8
24	2.0	30	0.5

Dimensions

All measurements are listed in millimeters [inches], unless noted otherwise. The measurements provided are subject to change.

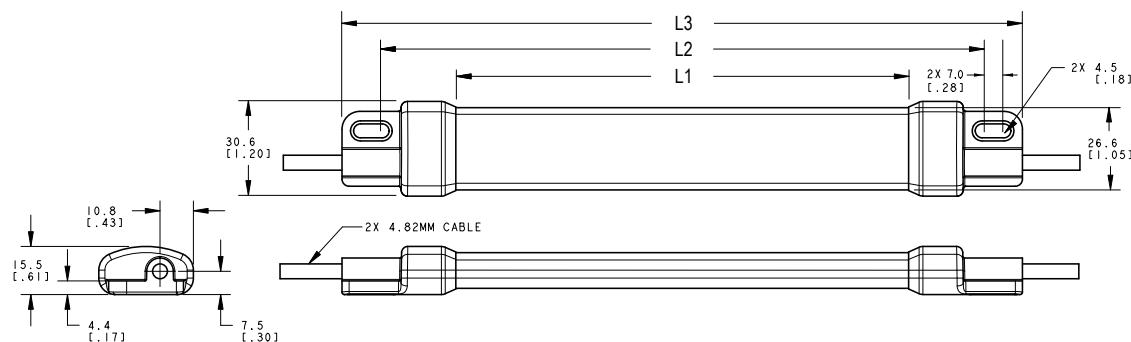

Models	L1	L2	L3
WLS15..0220..	146.4 mm (5.76 inches)	194 mm (7.64 inches)	220 mm (8.66 inches)
WLS15..0360..	286.4 mm (11.28 inches)	334 mm (13.15 inches)	360 mm (14.17 inches)
WLS15..0500..	426.4 mm (16.79 inches)	474 mm (18.66 inches)	500 mm (19.69 inches)
WLS15..0640..	566.4 mm (22.3 inches)	614 mm (24.17 inches)	640 mm (25.2 inches)
WLS15..0920..	846.4 mm (33.32 inches)	894 mm (35.2 inches)	920 mm (36.22 inches)
WLS15..1200..	1126.4 mm (44.35 inches)	1174 mm (46.22 inches)	1200 mm (47.24 inches)


Optical Data

Optical data shown below is for daylight white only. To get lux and candela values for warm white, green, red, yellow, blue, and amber, multiply the values shown on the charts by the following factors:


- Warm white: 0.971
- Green: 0.6
- Red: 0.314
- Yellow: 0.943
- Blue: 0.143
- Amber: 0.314

220 mm Models

Polar Candela Distribution

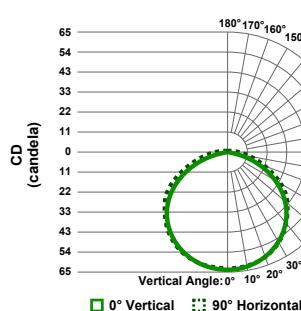

Isolux Pattern

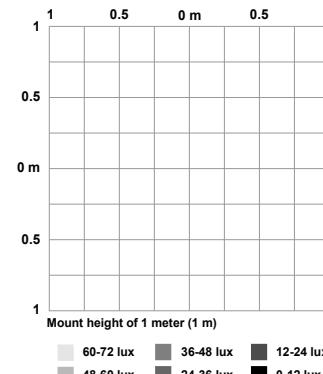

Illuminance at a Distance


Center Beam (lux)	Beam Width (m)
1805 lux	0.62 m 0.68 m
540 lux	1.07 m 1.20 m
247 lux	1.64 m 1.74 m
139 lux	2.02 m 2.28 m
93 lux	2.47 m 2.80 m
61 lux	2.94 m 3.34 m

Vert. 109.0°


Horiz. 116.6°

360 mm Models

Polar Candela Distribution

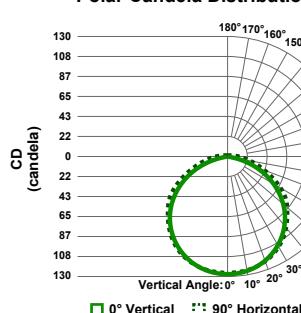

Isolux Pattern

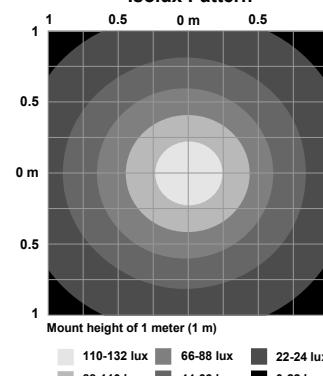

Illuminance at a Distance


Center Beam (lux)	Beam Width (m)
2948 lux	0.76 m 0.82 m
1031 lux	1.21 m 1.34 m
491 lux	1.68 m 1.88 m
275 lux	2.16 m 2.42 m
186 lux	2.61 m 2.94 m
110 lux	3.08 m 3.48 m

Vert. 109.0°


Horiz. 116.6°

500 mm Models

Polar Candela Distribution

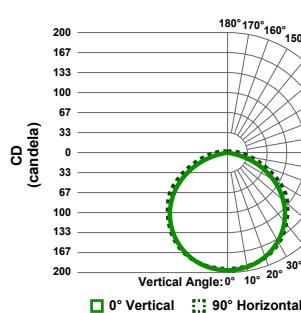

Isolux Pattern

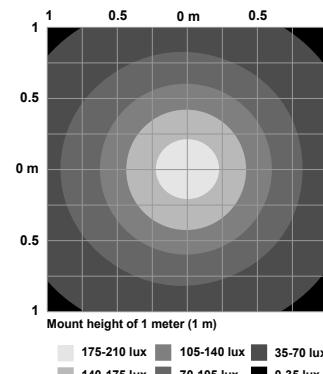

Illuminance at a Distance


Center Beam (lux)	Beam Width (m)
3450 lux	0.90 m 0.96 m
1379 lux	1.35 m 1.48 m
679 lux	1.82 m 2.02 m
402 lux	2.30 m 2.56 m
270 lux	2.75 m 3.08 m
193 lux	3.22 m 3.62 m

Vert. 109.0°


Horiz. 116.6°

640 mm Models

Polar Candela Distribution

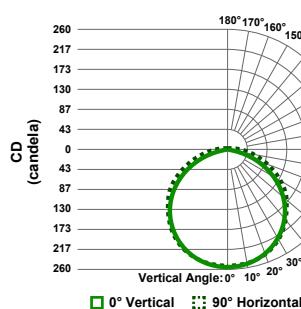

Isolux Pattern

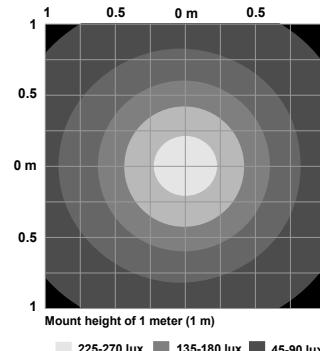

Illuminance at a Distance

Center Beam (lux)	Beam Width (m)
3680 lux	1.04 m 1.10 m
1619 lux	1.49 m 1.62 m
843 lux	1.96 m 2.16 m
514 lux	2.44 m 2.70 m
351 lux	2.89 m 3.22 m
253 lux	3.36 m 3.76 m


Vert. □ Horiz. □

Vertical Spread: 109.0°


Horizontal Spread: 116.6°

920 mm Models

Polar Candela Distribution

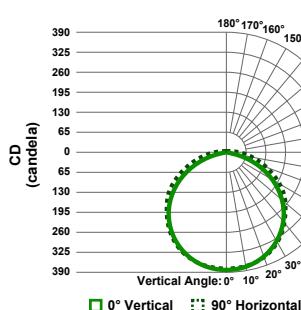

Isolux Pattern

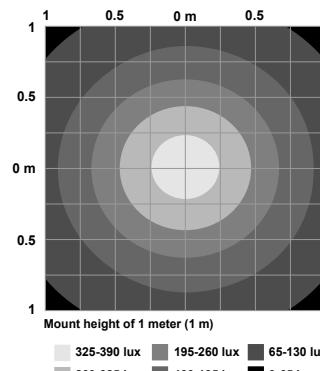

Illuminance at a Distance

Center Beam (lux)	Beam Width (m)
3911 lux	1.32 m 1.38 m
1891 lux	1.77 m 1.90 m
1082 lux	2.24 m 2.44 m
693 lux	2.72 m 2.98 m
488 lux	3.17 m 3.50 m
357 lux	3.64 m 4.04 m


Vert. □ Horiz. □

Vertical Spread: 109.0°


Horizontal Spread: 116.6°

1200 mm Models

Polar Candela Distribution

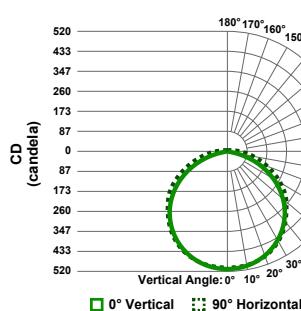

Isolux Pattern

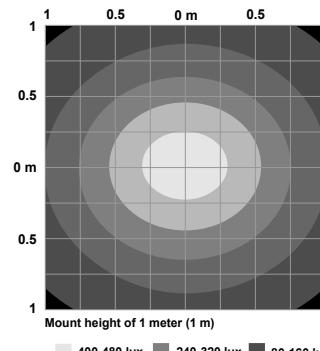

Illuminance at a Distance

Center Beam (lux)	Beam Width (m)
3923 lux	1.60 m 1.66 m
1992 lux	2.05 m 2.18 m
1193 lux	2.52 m 2.72 m
801 lux	3.00 m 3.26 m
588 lux	3.45 m 3.78 m
438 lux	3.92 m 4.32 m

Vert. □ Horiz. □

Vertical Spread: 109.0°

Horizontal Spread: 116.6°

Chapter Contents








Cordsets	10
Mounting Accessories	12
Power Supplies	13

Chapter 4

Accessories



Cordsets


Use single-ended cordsets between the power source and the quick-disconnect connection of a stand-alone light or the first light in a cascade. Use double-ended cordsets between lights in a cascade.

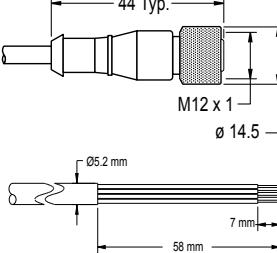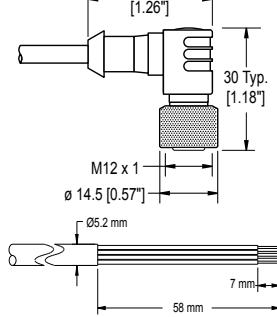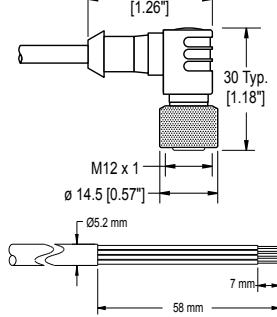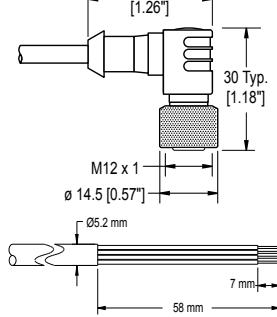4-Pin Single-Ended M12 Female Cordsets					
Model	Length	Style	Dimensions	Pinout (Female)	
MQDC-406	2 m (6.56 ft)	Straight			
MQDC-415	5 m (16.4 ft)				
MQDC-430	9 m (29.5 ft)				
MQDC-450	15 m (49.2 ft)				
MQDC-406RA	2 m (6.56 ft)	Right-Angle			
MQDC-415RA	5 m (16.4 ft)				
MQDC-430RA	9 m (29.5 ft)				
MQDC-450RA	15 m (49.2 ft)				



1 = Brown
2 = White
3 = Blue
4 = Black
5 = Not used

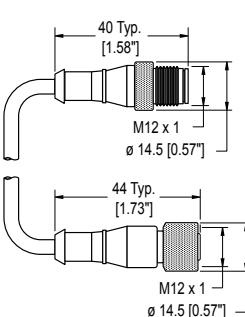



4-Pin Double-Ended M12 Female to M12 Male Cordsets				
Model	Length	Style	Dimensions	Pinout
MQDEC-401SS	0.31 m (1 ft)	Male Straight/Female Straight		
MQDEC-403SS	0.91 m (2.99 ft)			
MQDEC-406SS	1.83 m (6 ft)			
MQDEC-412SS	3.66 m (12 ft)			
MQDEC-415SS	4.58 m (15 ft)			
MQDEC-420SS	6.10 m (20 ft)			
MQDEC-430SS	9.14 m (30.2 ft)			
MQDEC-450SS	15.2 m (49.9 ft)			

4-Pin Flat Junction M12 Female Branch to M12 Male Trunk Splitter Cordsets			
Model	Branches (Female)	Trunk (Male)	Pinout
CSB-M1240M1240	No branch	No trunk	
CSB-M1240M1241		No trunk	
CSB-M1241M1241		0.31 m (1 ft)	
CSB-M1248M1241		2.44 m (8 ft)	
CSB-M12415M1241		4.57 m (15 ft)	
CSB-M12425M1241		7.60 m (25 ft)	
CSB-UNT425M1241		7.60 m (25 ft) Untermminated	
CSB-M1243M1243		2 x 1 m (3.28 ft)	
		1 m (3.28 ft)	

Single Color Only Cordsets

2-Pin Single-Ended Deutsch Female to Male Cordset				
Model	Length	Style	Dimensions	Pinout
DTMC-206	1.83 m (6 ft)	Straight		Male  Female 
DTMC-215	4.57 m (15 ft)			
DTMC-230	9.15 m (30 ft)			1 = Brown 2 = Blue


2-Pin Double-Ended Deutsch Female to Male Cordset				
Model	Length	Style	Dimensions	Pinout
DTMEC-2005	0.16 m (0.5 ft)	Straight		Male  Female 
DTMEC-201	0.31 m (1 ft)			
DTMEC-203	0.91 m (3 ft)			
DTMEC-206	1.83 m (6 ft)			
DTMEC-212	3.66 m (12 ft)			
DTMEC-220	6.10 m (20 ft)			
DTMEC-230	9.15 m (30 ft)			1 = Brown 2 = Blue

Mounting Accessories

All measurements are listed in millimeters [inches], unless noted otherwise. The measurements provided are subject to change.


LMBWLS15

- Stainless steel clip bracket
- Includes 3 clip brackets and 2 plastic spacers
- Clearance hole for M5 hardware




LMBWLS15-150S

- Set of 2 stainless steel swivel brackets, allows for 150° of movement
- Clearance hole for M5 button head screw



LMBWLS15MAG

- Set of 2 brackets
- Magnetic mounting bracket for attachment to steel and iron surfaces



LMBWLS15TD <ul style="list-style-type: none"> Includes 4 100 mm (4 in) strips of 3M™ Dual Lock™ reclosable fasteners Recommended for mounting to metal and plastic surfaces Strong, pressure-sensitive adhesive bonds on contact 	
LMBWLS15TF <ul style="list-style-type: none"> Includes 2 100 mm (4 in) strips of double-sided foam urethane strips Acrylic adhesive provides high bond strength to most surfaces Bonds to low surface energy plastics such as polypropylene and powder-coated paints 	
ACC-CAP M12-10 <ul style="list-style-type: none"> 10 Caps Seal and protect exposed, unterminated M12 quick-disconnect connectors 	

Power Supplies

For use with lights connected in series (cascades of lights) that do not exceed a total maximum operating current of 4A (refer to maximum current specifications):

PSD-24-4 <ul style="list-style-type: none"> 90 to 264 V AC 50/60 Hz input Includes a 1.8 m (6 ft) US-style 5-15P input plug 24 V DC UL Listed Class 2 M12 connector output 4 A total current 	
---	--

For use with all non-cascadable lights, or with lights connected in series (cascades of lights) that do not exceed a total maximum operating current of 1A (refer to maximum current specifications):

PSW-24-1 <ul style="list-style-type: none"> 24 V DC, 1 A Class 2 UL Listed power supply 100 V AC to 240 V AC 50/60 Hz input 2 m (6.5 ft) PVC cable with M12 quick disconnect Includes Type A (US, Canada, Japan, Puerto Rico, Taiwan), Type C (Germany, France, South Korea, Netherlands, Poland, Spain, Turkey), Type G (United Kingdom, Ireland, Singapore, Vietnam), and Type I (China, Australia, New Zealand) AC detachable input plugs 	
---	---

Chapter Contents

Clean with Mild Detergent and Warm Water	14
Repairs	14
Contact Us	14
Banner Engineering Corp Limited Warranty	14

Chapter 5 Product Support and Maintenance

Clean with Mild Detergent and Warm Water

Wipe down the device with a soft cloth dampened with a mild detergent and warm water solution. Do not use any other chemicals for cleaning.

Repairs

Contact Banner Engineering for troubleshooting of this device. **Do not attempt any repairs to this Banner device; it contains no field-replaceable parts or components.** If the device, device part, or device component is determined to be defective by a Banner Applications Engineer, they will advise you of Banner's RMA (Return Merchandise Authorization) procedure.

IMPORTANT: If instructed to return the device, pack it with care. Damage that occurs in return shipping is not covered by warranty.

Contact Us

Banner Engineering Corp. | 9714 Tenth Avenue North | Plymouth, MN 55441, USA | Phone: +1 888 373 6767

For worldwide locations and local representatives, visit www.bannerengineering.com.

Banner Engineering Corp Limited Warranty

Banner Engineering Corp. warrants its products to be free from defects in material and workmanship for one year following the date of shipment. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture which, at the time it is returned to the factory, is found to have been defective during the warranty period. This warranty does not cover damage or liability for misuse, abuse, or the improper application or installation of the Banner product.

THIS LIMITED WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED (INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), AND WHETHER ARISING UNDER COURSE OF PERFORMANCE, COURSE OF DEALING OR TRADE USAGE.

This Warranty is exclusive and limited to repair or, at the discretion of Banner Engineering Corp., replacement. **IN NO EVENT SHALL BANNER ENGINEERING CORP. BE LIABLE TO BUYER OR ANY OTHER PERSON OR ENTITY FOR ANY EXTRA COSTS, EXPENSES, LOSSES, LOSS OF PROFITS, OR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES RESULTING FROM ANY PRODUCT DEFECT OR FROM THE USE OR INABILITY TO USE THE PRODUCT, WHETHER ARISING IN CONTRACT OR WARRANTY, STATUTE, TORT, STRICT LIABILITY, NEGLIGENCE, OR OTHERWISE.**

Banner Engineering Corp. reserves the right to change, modify or improve the design of the product without assuming any obligations or liabilities relating to any product previously manufactured by Banner Engineering Corp. Any misuse, abuse, or improper application or installation of this product or use of the product for personal protection applications when the product is identified as not intended for such purposes will void the product warranty. Any modifications to this product without prior express approval by Banner Engineering Corp will void the product warranties. All specifications published in this document are subject to change; Banner reserves the right to modify product specifications or update documentation at any time. Specifications and product information in English supersede that which is provided in any other language. For the most recent version of any documentation, refer to: www.bannerengineering.com.

For patent information, see www.bannerengineering.com/patents.

Mexican Importer

Banner Engineering de México, S. de R.L. de C.V. | David Alfaro Siqueiros 103 Piso 2 Valle oriente | San Pedro Garza García Nuevo León, C. P. 66269
81 8363.2714



[LinkedIn](#)



[X](#)



[Facebook](#)



[Instagram](#)

