

## Low Loss RA SMA Male to SMA Female Cable LL142 Coax in 200 cm with LF Solder

The RA SMA male to SMA female 200 cm cable using LL142 coax, part number FMCA1263-200CM, from Fairview Microwave is in-stock and ships same day. This Fairview SMA to SMA cable assembly has a male to female gender configuration with 50 ohm flexible LL142 coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMCA1263-200CM SMA male to SMA female cable assembly operates to 18 GHz. The right angle SMA interface on the LL142 cable allows for easier connections in tight spaces. The triple shielding of this Fairview cable assembly provides excellent shielding effectiveness of better than 95 dB. Fairview High performance test cables boast 83% phase velocity and offer excellent low loss performance up to 18 GHz. The FMCA1263 cable assemblies use durable stainless steel connectors and an FEP jacket. The connector/cable interface has double heat-shrink booting which provides added strain relief while increasing the durability of the cable assembly. The low attenuation per foot in a 0.195 inch diameter cable creates a cable that has good flexibility while offering industry leading loss characteristics. All FMCA1263 cable assemblies are 100% RF tested to ensure the VSWR and insertion loss specifications meet or exceed Fairview's published electrical specifications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

### Electrical Specifications

| Description             | Min | Typ        | Max   | Units        |
|-------------------------|-----|------------|-------|--------------|
| Frequency Range         | DC  |            | 18    | GHz          |
| VSWR                    |     |            | 1.4:1 |              |
| Return Loss             |     |            | 15.46 | dB           |
| Insertion Loss          |     |            | 3     | dB           |
| Velocity of Propagation |     | 83         |       | %            |
| RF Shielding            | 95  |            |       | dB           |
| Capacitance             |     | 25 [82.02] |       | pF/ft [pF/m] |

### Performance by Frequency

| Description           | F1   | F2   | F3   | F4   | F5   | Units |
|-----------------------|------|------|------|------|------|-------|
| Frequency             | 1    | 2    | 4.5  | 9    | 18   | GHz   |
| Insertion Loss (Max.) | 1.1  | 1.3  | 1.7  | 2.3  | 3    | dB    |
| Insertion Loss (Typ.) | 0.88 | 1.07 | 1.46 | 1.92 | 2.57 | dB    |

### Mechanical Specifications

#### Cable Assembly

Length\* 78.74 in [200 cm]



### Configuration:

- SMA Male Right Angle
- SMA Female
- LL142

### Features:

- Max Frequency 18 GHz
- Shielding Effectivity > 95 dB
- 83% Phase Velocity
- Triple Shielded
- FEP Jacket
- 83% Velocity of Propagation (Vop)
- Shielding effectiveness >95 dB
- Maximum VSWR is < 1.40:1 to 18 GHz
- Minimum Bend Radius of 1 inch
- Operating Temperature range of -55 to +125°C
- 100% RF Tested
- Custom lengths available

### Applications:

- General Purpose
- Laboratory Use
- Long Run coaxial cable applications
- Antenna testing
- Low loss system cables

Fairview Microwave  
 301 Leora Ln., Suite 100  
 Lewisville, TX 75056  
 Tel: 1-800-715-4396 / (972) 649-6678  
 Fax: (972) 649-6689  
[www.fairviewmicrowave.com](http://www.fairviewmicrowave.com)  
[sales@fairviewmicrowave.com](mailto:sales@fairviewmicrowave.com)

**Cable**

|                                      |                           |
|--------------------------------------|---------------------------|
| Cable Type                           | LL142                     |
| Impedance                            | 50 Ohms                   |
| Inner Conductor Type                 | Solid                     |
| Inner Conductor Material and Plating | Copper, Silver            |
| Dielectric Type                      | PTFE                      |
| Number of Shields                    | 3                         |
| Shield Layer 1                       | Silver Plated Copper Tape |
| Shield Layer 2                       | Aluminum Polyester        |
| Shield Layer 3                       | Silver Plated Copper Wire |
| Jacket Material                      | FEP, Green                |
| Jacket Diameter                      | 0.195 in [4.95 mm]        |

One Time Minimum Bend Radius 1 in [25.4 mm]

**Connectors**

| Description                     | Connector 1                | Connector 2                |
|---------------------------------|----------------------------|----------------------------|
| Type                            | SMA Male                   | SMA Female                 |
| Specification                   | MIL-PRF-39012              |                            |
| Impedance                       | 50 Ohms                    | 50 Ohms                    |
| Contact Material & Plating      | Beryllium Copper, Gold     | Beryllium Copper, Gold     |
| Contact Plating Spec.           | ASTM-B488, 50µ In. Min     | ASTM-B488, 50µ In. Minimum |
| Dielectric Type                 | PTFE                       | PTFE                       |
| Outer Cond Material & Plating   |                            | Passivated Stainless Steel |
| Outer Cond Plating Spec.        |                            | SAE-AMS-2700               |
| Body Material & Plating         | Passivated Stainless Steel | Passivated Stainless Steel |
| Body Plating Spec.              | SAE-AMS-2700               | SAE-AMS-2700               |
| Coupling Nut Material & Plating | Passivated Stainless Steel |                            |
| Coupling Nut Plating Spec.      | SAE-AMS-2700               |                            |
| Hex Size                        | 5/16 Inch                  |                            |
| Torque                          | 8 in-lbs 0.9 Nm            |                            |

**Environmental Specifications**
**Temperature**

Operating Range -55 to +125 deg C

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**


Notes:

- Values at 25°C, sea level.

## How to Order

Part Number Configuration:

**FMCA1263 - xx uu**

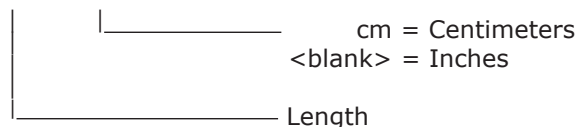


Example: FMCA1263-12 = 12 inches long cable  
FMCA1263-100cm = 100 cm long cable

Low Loss RA SMA Male to SMA Female Cable LL142 Coax in 200 cm with LF Solder from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: [Low Loss RA SMA Male to SMA Female Cable LL142 Coax in 200 cm with LF Solder FMCA1263-200CM](https://www.fairviewmicrowave.com/low-loss-ra-sma-male-sma-female-cable-ll142-coax-fmca1263-200cm-p.aspx)

URL: <https://www.fairviewmicrowave.com/low-loss-ra-sma-male-sma-female-cable-ll142-coax-fmca1263-200cm-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

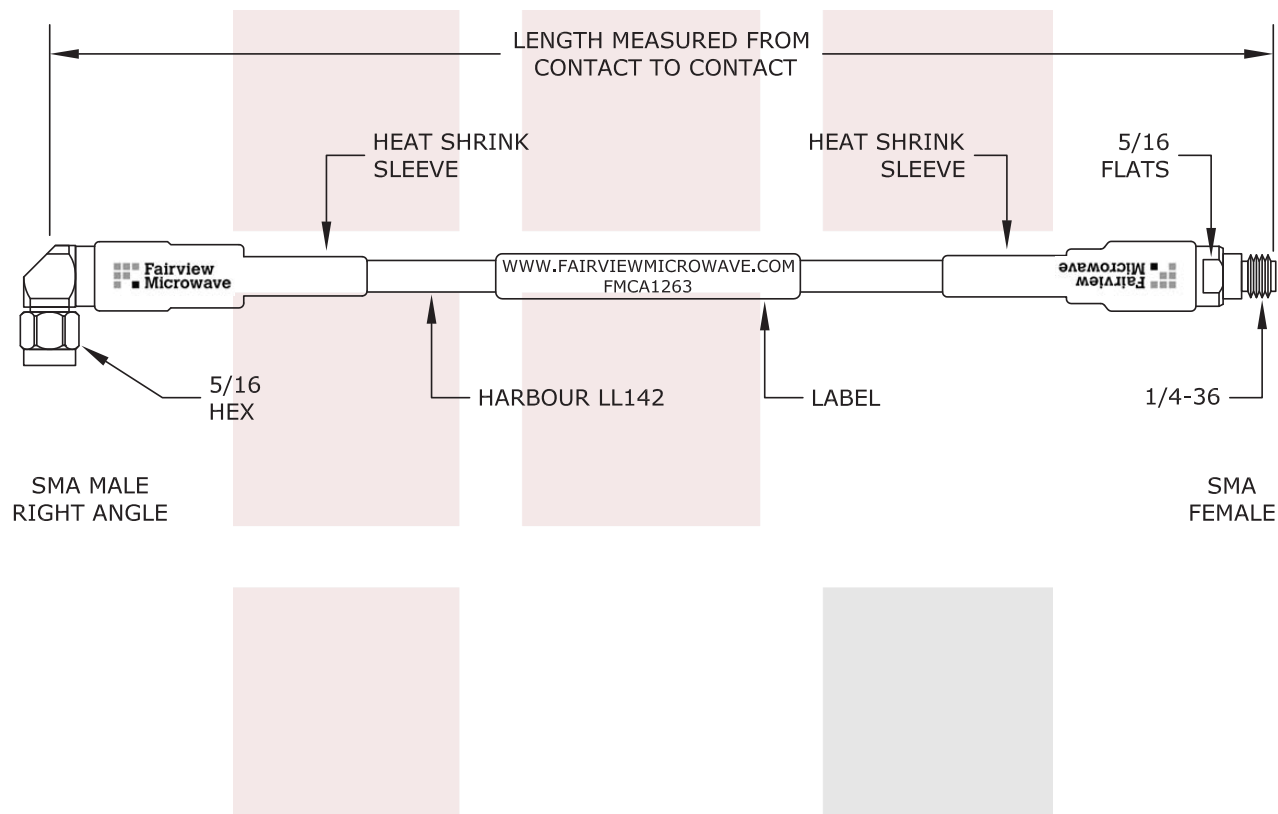

**NOTE:**

LABEL FOR CABLE LENGTHS 48" OR SHORTER TO BE CENTERED. LONGER THAN 48" WILL BE 6" AWAY FROM CONNECTOR.

|                                                                                          |        |                                                                                                                                                                                     |       |                           |             |
|------------------------------------------------------------------------------------------|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|---------------------------|-------------|
| <b>FAIRVIEW MICROWAVE INC.</b><br>ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM              |        | NOTES:<br>1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.<br>2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.<br>3. DIMENSIONS ARE IN INCHES [mm]. |       |                           |             |
| TITLE<br>Low Loss RA SMA Male to SMA Female Cable LL142<br>Coax in 200 cm with LF Solder |        | DWG NO<br><b>FMCA1263</b>                                                                                                                                                           |       | CAGE CODE<br><b>3FKR5</b> |             |
| CAD FILE                                                                                 | 072216 | SHEET                                                                                                                                                                               | SCALE | N/A                       | SIZE A 2233 |