

2.2-5 Female to 4.3-10 Male Right Angle Low PIM Cable
12 Inch Length Using 1/4 inch Superflexible Coax




RF Cable Assemblies Technical Data Sheet

PE3C8056-12


Configuration

- Connector 1: 2.2-5 Female
- Connector 2: 4.3-10 Male Right Angle
- Cable Type: 1/4" Superflexible



Features

- Max Frequency 6 GHz
- Low PIM: -160 dBc Max
- Shielding Effectivity > 120 dB
- 82% Phase Velocity
- PE Jacket
- Low PIM and Low Loss
- 100% Tested with PIM Test Results Marked on Cable

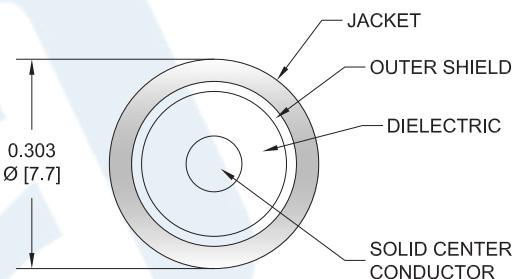

Applications

- General Purpose
- Laboratory Use
- Low PIM Applications
- Distributed Antenna Systems (DAS)
- PIM Testing

Description

Pasternack's PE3C8056-12 2.2-5 female to 4.3-10 male right angle 12 inch cable using 1/4 inch superflexible coax is part of our full line of RF components available for same-day shipping. Pasternack's corrugated RF cable assemblies are ideal for applications where durability and high power are needed. This Pasternack 2.2-5 to 4.3-10 cable assembly has a female to male gender configuration with 50 ohm corrugated 1/4" superflexible coax. The PE3C8056-12 2.2-5 female to 4.3-10 male cable assembly operates to 6 GHz. Our low PIM design also offers excellent passive intermodulation performance with PIM levels better than -160 dBc. The right angle 4.3-10 interface on the 1/4" superflexible cable allows for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.4:1	
Velocity of Propagation		82		%
RF Shielding	120			dB
Passive Intermodulation			-160	dBc

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.2-5 Female to 4.3-10 Male Right Angle Low PIM Cable 12 Inch Length Using 1/4 inch Superflexible Coax PE3C8056-12](#)

2.2-5 Female to 4.3-10 Male Right Angle Low PIM Cable
12 Inch Length Using 1/4 inch Superflexible Coax



RF Cable Assemblies Technical Data Sheet

PE3C8056-12

Capacitance	24.4 [80.05]	pF/ft [pF/m]
Inductance	0.059 [0.19]	uH/ft [uH/m]
DC Resistance Inner Conductor	3.2 [10.5]	Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor	2.53 [8.3]	Ω/1000ft [Ω/Km]
Jacket Spark	2,000	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	3	GHz
Insertion Loss (Typ.)	0.26	0.27	0.28	0.3	0.35	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax and connectors used in this assembly. The Insertion Loss includes an estimated 0.15 dB for the right angle connector and 0.1 dB for the straight connector.

Mechanical Specifications

Cable Assembly

Length*

12 in [304.8 mm]

Cable

Cable Type

1/4" Superflexible

Impedance

50 Ohms

Inner Conductor Type

Solid

Inner Conductor Material and Plating

Copper Clad Aluminum

Dielectric Type

PE (F)

Number of Shields

1

Shield Layer 1

Helically Corrugated Copper Tube

Jacket Material

PE, Black

Jacket Diameter

0.303 in [7.7 mm]

One Time Minimum Bend Radius

0.5 in [12.7 mm]

Repeated Minimum Bend Radius

1 in [25.4 mm]

Typical Flex Cycles

20

Tensile Strength

79 lbs [35.83 Kg]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.2-5 Female to 4.3-10 Male Right Angle Low PIM Cable 12 Inch Length Using 1/4 inch Superflexible Coax PE3C8056-12](#)

2.2-5 Female to 4.3-10 Male Right Angle Low PIM Cable
12 Inch Length Using 1/4 inch Superflexible Coax



RF Cable Assemblies Technical Data Sheet

PE3C8056-12

Connectors

Description	Connector 1	Connector 2
Type	2.2-5 Female	4.3-10 Male Right Angle
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Bronze, Silver	Brass, Silver
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating	Bronze, Silver	
Body Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Coupling Nut Material and Plating		Brass, Tri-Metal

Environmental Specifications

Temperature

Operating Range

-40 to +85 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.2-5 Female to 4.3-10 Male Right Angle Low PIM Cable 12 Inch Length Using 1/4 inch Superflexible Coax PE3C8056-12](#)

2.2-5 Female to 4.3-10 Male Right Angle Low PIM Cable
12 Inch Length Using 1/4 inch Superflexible Coax



RF Cable Assemblies Technical Data Sheet

PE3C8056-12

How to Order

Part Number Configuration:

PE3C8056

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3C8056-12 = 12 inches long cable
PE3C8056-100cm = 100 cm long cable

2.2-5 Female to 4.3-10 Male Right Angle Low PIM Cable 12 Inch Length Using 1/4 inch Superflexible Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.2-5 Female to 4.3-10 Male Right Angle Low PIM Cable 12 Inch Length Using 1/4 inch Superflexible Coax PE3C8056-12](#)


URL: <https://www.pasternack.com/2.2-5-female-4.3-10-male-pe-1-4-sfhc-cable-pe3c8056-12-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C8056-12 CAD Drawing

2.2-5 Female to 4.3-10 Male Right Angle Low PIM Cable
12 Inch Length Using 1/4 inch Superflexible Coax

REVISIONS					
REV.	DESCRIPTION	DATE	APPROVED		
A	INITIAL RELEASE	10/03/2021	SELLIS		

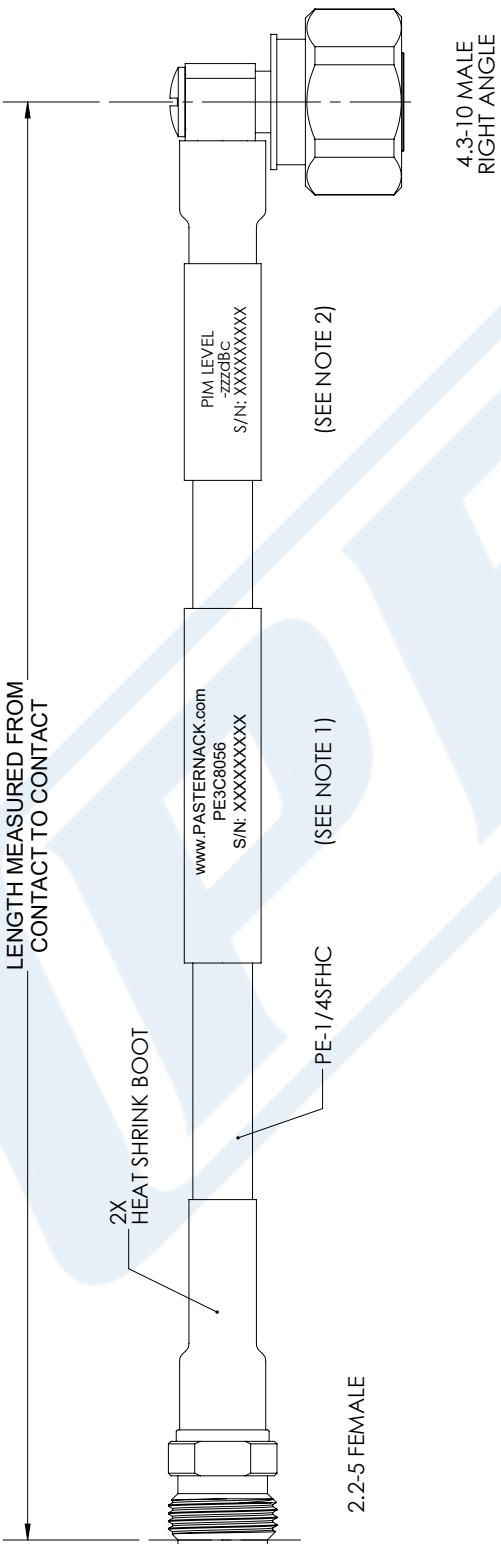

NOTES

1. CABLES 84" AND UNDER HAVE 1 LABEL CENTERED. CABLES OVER 84" HAVE 2 LABELS, ONE AT EACH END 12.0" FROM THE END OF THE CONNECTOR.
2. 6" FROM CABLE END 1 PLACE FOR ALL LENGTHS OF CABLE.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

 PASTERNACK an INFINITE brand		THIRD-ANGLE PROJECTION 
THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNACK CORPORATION. ALL RIGHTS RESERVED.		
PASTERNACK Enterprises, Inc. P.O. Box 16759, Irvine, CA 92623. Phone: 1.949.261.9200 1.866.727.8376 Fax: 1.949.261.7451 Website: www.pasternack.com E-mail: sales@pasternack.com	1 OF 1	SCALE N/A
SIZE A 53919 CAGE CODE MVEERAPPAN ITEM NO. PE3C8056	REV A	