

Fiber Optic Transceiver, XFP, 1550nm, ZR SMF  
80km, 10G/OC-192 DDM, Adtran



## FXC-XFP-ZR10G-ADT

### Features

- Operating Data Rate up to 11.30 Gbps
- Distance Range 80KM
- Pluggable XFP Duplex LC Connector
- Standard and Industrial Operating Temperature
- Compliant with Adtran XFP Specification

### Applications

- Telecom (Service Provider)
- Datacom
- Enterprise Networks
- Government
- Fiber to the home/business

### Description

The L-com FXC-XFP-ZR10G-ADT is an XFP form-factor transceiver, supporting 10G Ethernet/OC-192 data rates. The L-com FXC-XFP-ZR10G-ADT supports 80KM distance and it is Adtran compliant transceiver. The L-com FXC-XFP-ZR10G-ADT features digital diagnostics for performance monitoring of the transceiver. The L-com FXC-XFP-ZR10G-ADT is one of thousands of fiber optic connectivity products available from L-com in-stock and ready to ship. Contact our knowledgeable technical support and sales staff for your answers on fiber optic connectivity or other L-com products.

### Configuration

Data Rate	10 Gbps
Form Factor	XFP
Connector	LC
Connector Mode	Duplex
Mode	Single Mode
Distance	80 km
Mfg Platform Compatibility	Adtran

### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Wattage (Wcc3)			1.79	W
Power Supply Voltage (Vcc3)	3.13	3.3	3.57	V
Power Supply Current (Icc3)			500	mA
Wattage (Wcc5)			1.95	W
Power Supply Voltage (Vcc5)	4.75	5	5.25	V
Power Supply Current (Icc5)			370	mA

### Optical Specifications

Description	Minimum	Typical	Maximum	Units
TX Center Wavelength	1530	1550	1565	nm
TX Data Rate		11.3		Gbps

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:  
[Fiber Optic Transceiver, XFP, 1550nm, ZR SMF 80km, 10G/OC-192 DDM, Adtran FXC-XFP-ZR10G-ADT](#)

Fiber Optic Transceiver, XFP, 1550nm, ZR SMF  
80km, 10G/OC-192 DDM, Adtran



## FXC-XFP-ZR10G-ADT

TX Spectral Width			1	nm
TX Average Output Power	0		4	dBm
TX Extinction Ratio	9			dB
RX Center Wavelength	1270	1550	1600	nm
RX Receiver Sensitivity	-24			dBm
RX Receiver Overload			-7	dBm

### Environmental Specifications

#### Temperature

Operating Range

0 to +70 deg C

Storage Range

-40 to +85 deg C

Notes:

### Compliance Certifications (see [product page](#) for current document)

### Plotted and Other Data

Notes:

Fiber Optic Transceiver, XFP, 1550nm, ZR SMF  
80km, 10G/OC-192 DDM, Adtran



## FXC-XFP-ZR10G-ADT

**Table 1 Module Electrical Pin Definition**

Pin	Logic	Symbol	Name/Description	Note
1		GND	Module Ground	1
2		VEE5	Optional -5.2V Power Supply	
3	LVTTL-I	Mod_DeSel	Module De-select; When held low allows module to respond to 2-wire serial interface	
4	LVTTL-O	$\overline{\text{Interrupt}}$	$\overline{\text{Interrupt}}$ ; Indicates presence of an important condition which can be read over the 2-wire serial interface	2
5	LVTTL-I	TX_DIS	Transmitter Disable; Turns off transmitter laser output	
6		VCC5	+5V Power Supply	
7		GND	Module Ground	1
8		VCC3	+3.3V Power Supply	
9		VCC3	+3.3V Power Supply	
10	LVTTL-I/O	SCL	2-Wire Serial Interface Clock	2
11	LVTTL-I/O	SDA	2-Wire Serial Interface Data Line	2
12	LVTTL-O	Mod_Abs	Indicates Module is not present. Grounded in the Module	2
13	LVTTL-O	Mod_NR	Module Not Ready; Indicating Module Operational Fault	2
14	LVTTL-O	RX_LOS	Receiver Loss Of Signal Indicator	2
15		GND	Module Ground	1
16		GND	Module Ground	1
17	CML-O	RD-	Receiver Inverted Data Output	
18	CML-O	RD+	Receiver Non-Inverted Data Output	
19		GND	Module Ground	1
20		VCC2	+1.8V Power Supply	3
21	LVTTL-I	P_Down/RST	Power down; When high, requires the module to limit power consumption to 1.5W or below. 2-Wire serial interface must be functional in the low power mode. Reset; The falling edge initiates a complete reset of the module including the 2-wire serial interface, equivalent to a power cycle.	
22		VCC2	+1.8V Power Supply	3
23		GND	Module Ground	1
24	PECL-I	RefCLK+	Reference Clock Non-Inverted Input, AC coupled on the host board	
25	PECL-I	RefCLK-	Reference Clock Inverted Input, AC coupled on the host board	
26		GND	Module Ground	1
27		GND	Module Ground	1
28	CML-I	TD-	Transmitter Inverted Data Input	
29	CML-I	TD+	Transmitter Non-Inverted Data Input	
30		GND	Module Ground	1

1. Module ground pins Gnd are isolated from the module case and chassis ground within the modul  
2. Shall be pulled up with 4.7K-1 ohms to a voltage between 3.15V and 3.45V on the host board.  
3. The 1.8 V wer supply can be optionally programmed to voltages lower than 1.8 V in modules supporting the variable power supply.

Fiber Optic Transceiver, XFP, 1550nm, ZR SMF  
80km, 10G/OC-192 DDM, Adtran

**FXC-XFP-ZR10G-ADT**

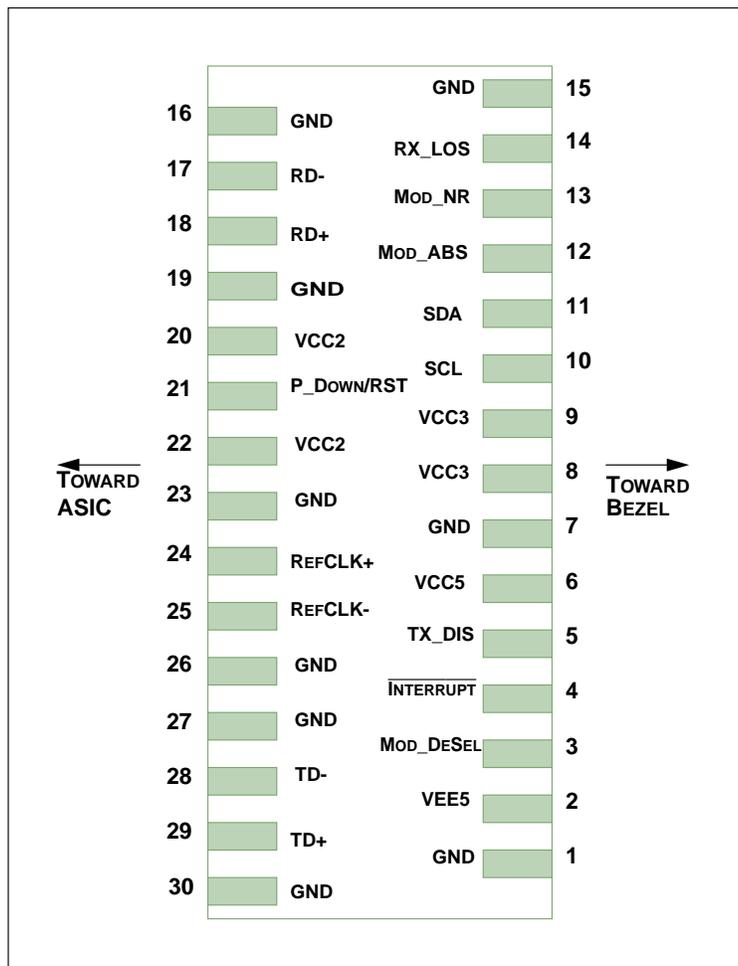


Figure 1 Host PCB XFP Pinout Top View

Fiber Optic Transceiver, XFP, 1550nm, ZR SMF  
80km, 10G/OC-192 DDM, Adtran


## FXC-XFP-ZR10G-ADT



Fiber Optic Transceiver, XFP, 1550nm, ZR SMF 80km, 10G/OC-192 DDM, Adtran from L-com has same day shipment for domestic and International orders. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

L-com CAD Drawing

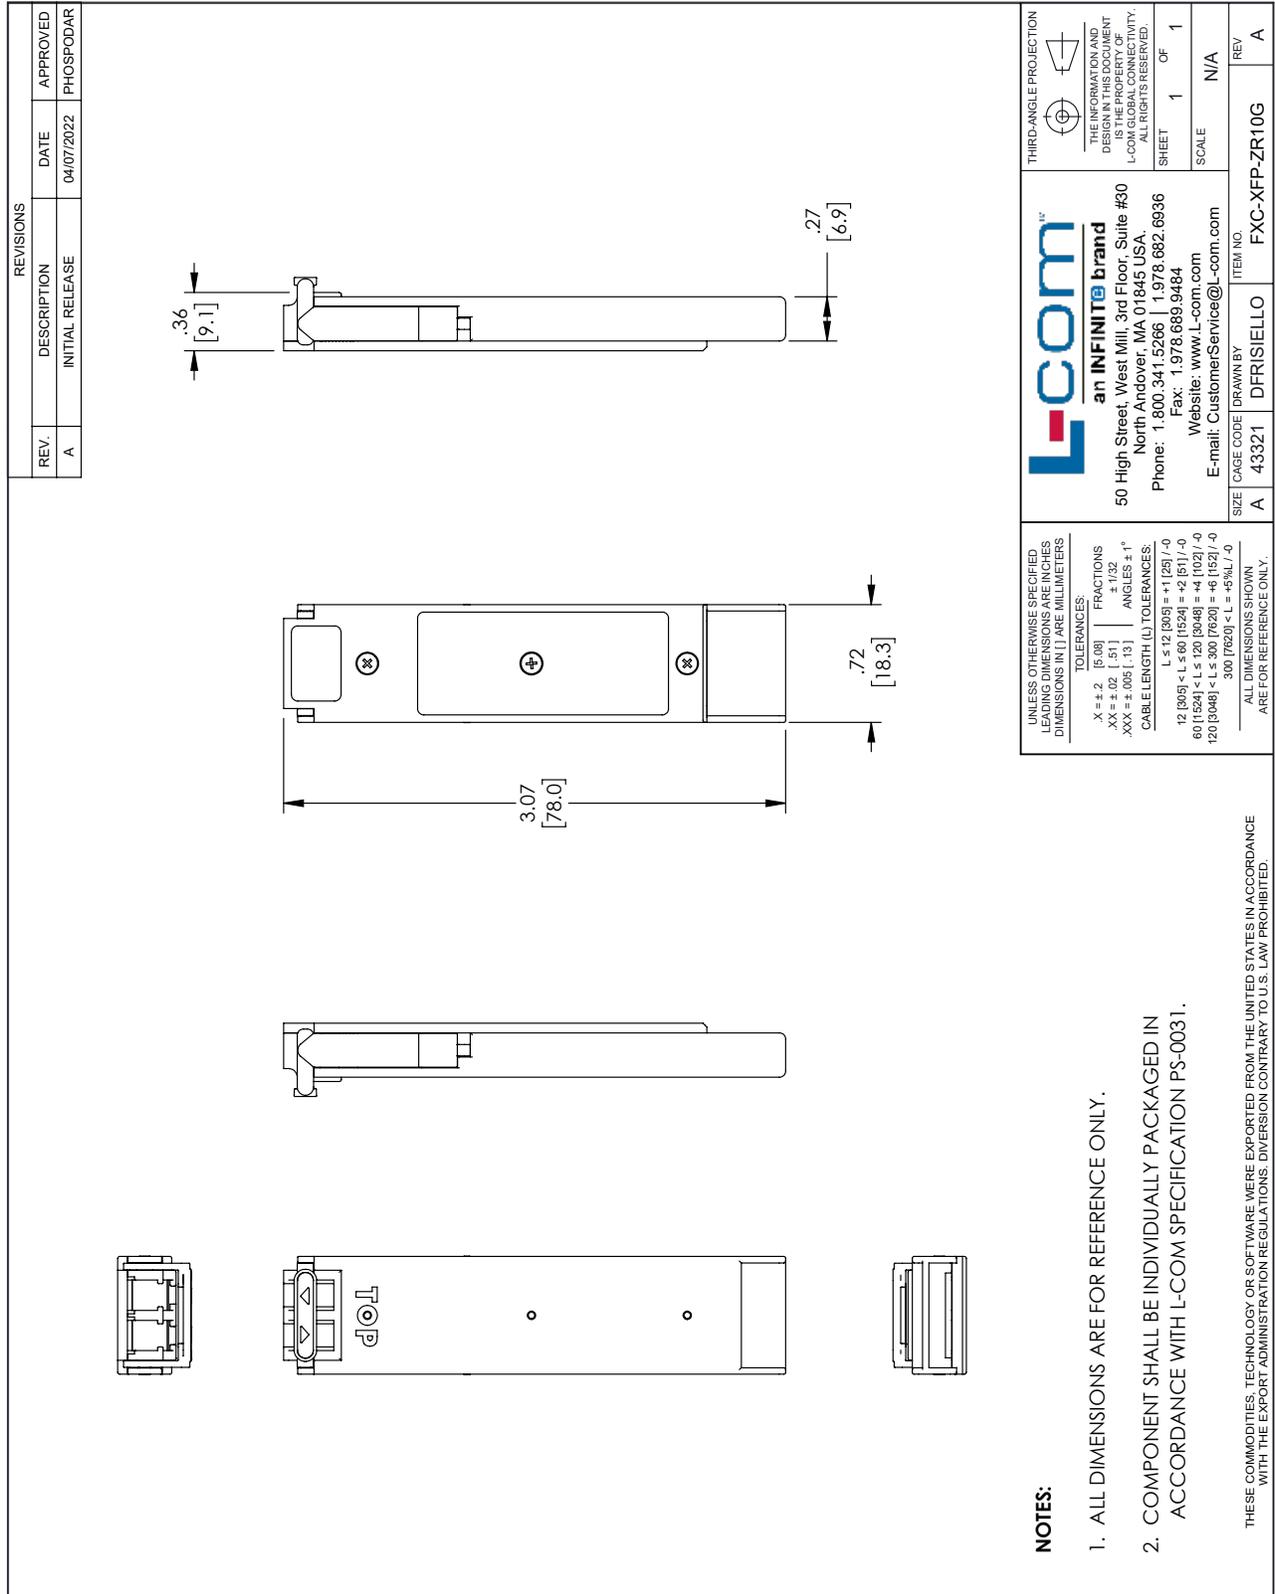

**L-com**  
an INFINITE brand

50 High Street, West Mill, 3rd Floor, Suite #30  
North Andover, MA 01845 USA.  
Phone: 1.800.341.5266 | 1.978.682.6936  
Fax: 1.978.689.9484  
Website: www.L-com.com  
E-mail: CustomerService@L-com.com

THIRD-ANGLE PROJECTION

THE INFORMATION AND DIMENSIONS SHOWN ARE THE PROPERTY OF L-COM GLOBAL CONNECTIVITY. ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE N/A

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE IN INCHES DIMENSIONS IN [ ] ARE MILLIMETERS	TOLERANCES: X = ±.2 [5.08] .XX = ±.02 [ .51] .XXX = ±.005 [ .13] ANGLES ± 1°	CABLE LENGTH (L) TOLERANCES: L ≤ 12 [305] = ±1 [25] / -0 60 [1524] < L ≤ 60 [1524] = +2 [51] / -0 120 [3048] < L ≤ 300 [7620] = +6 [152] / -0 300 [7620] < L = +5% / -0	ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.
SIZE	CAGE CODE	DRAWN BY	ITEM NO.
A	43321	DFRISIELLO	FXC-XFP-ZR10G
			REV A